


Class 24—Switches

CLASS 24
SWITCHES
(ALL TYPES)

RESTRICTED

NAVSHIPS 900,109

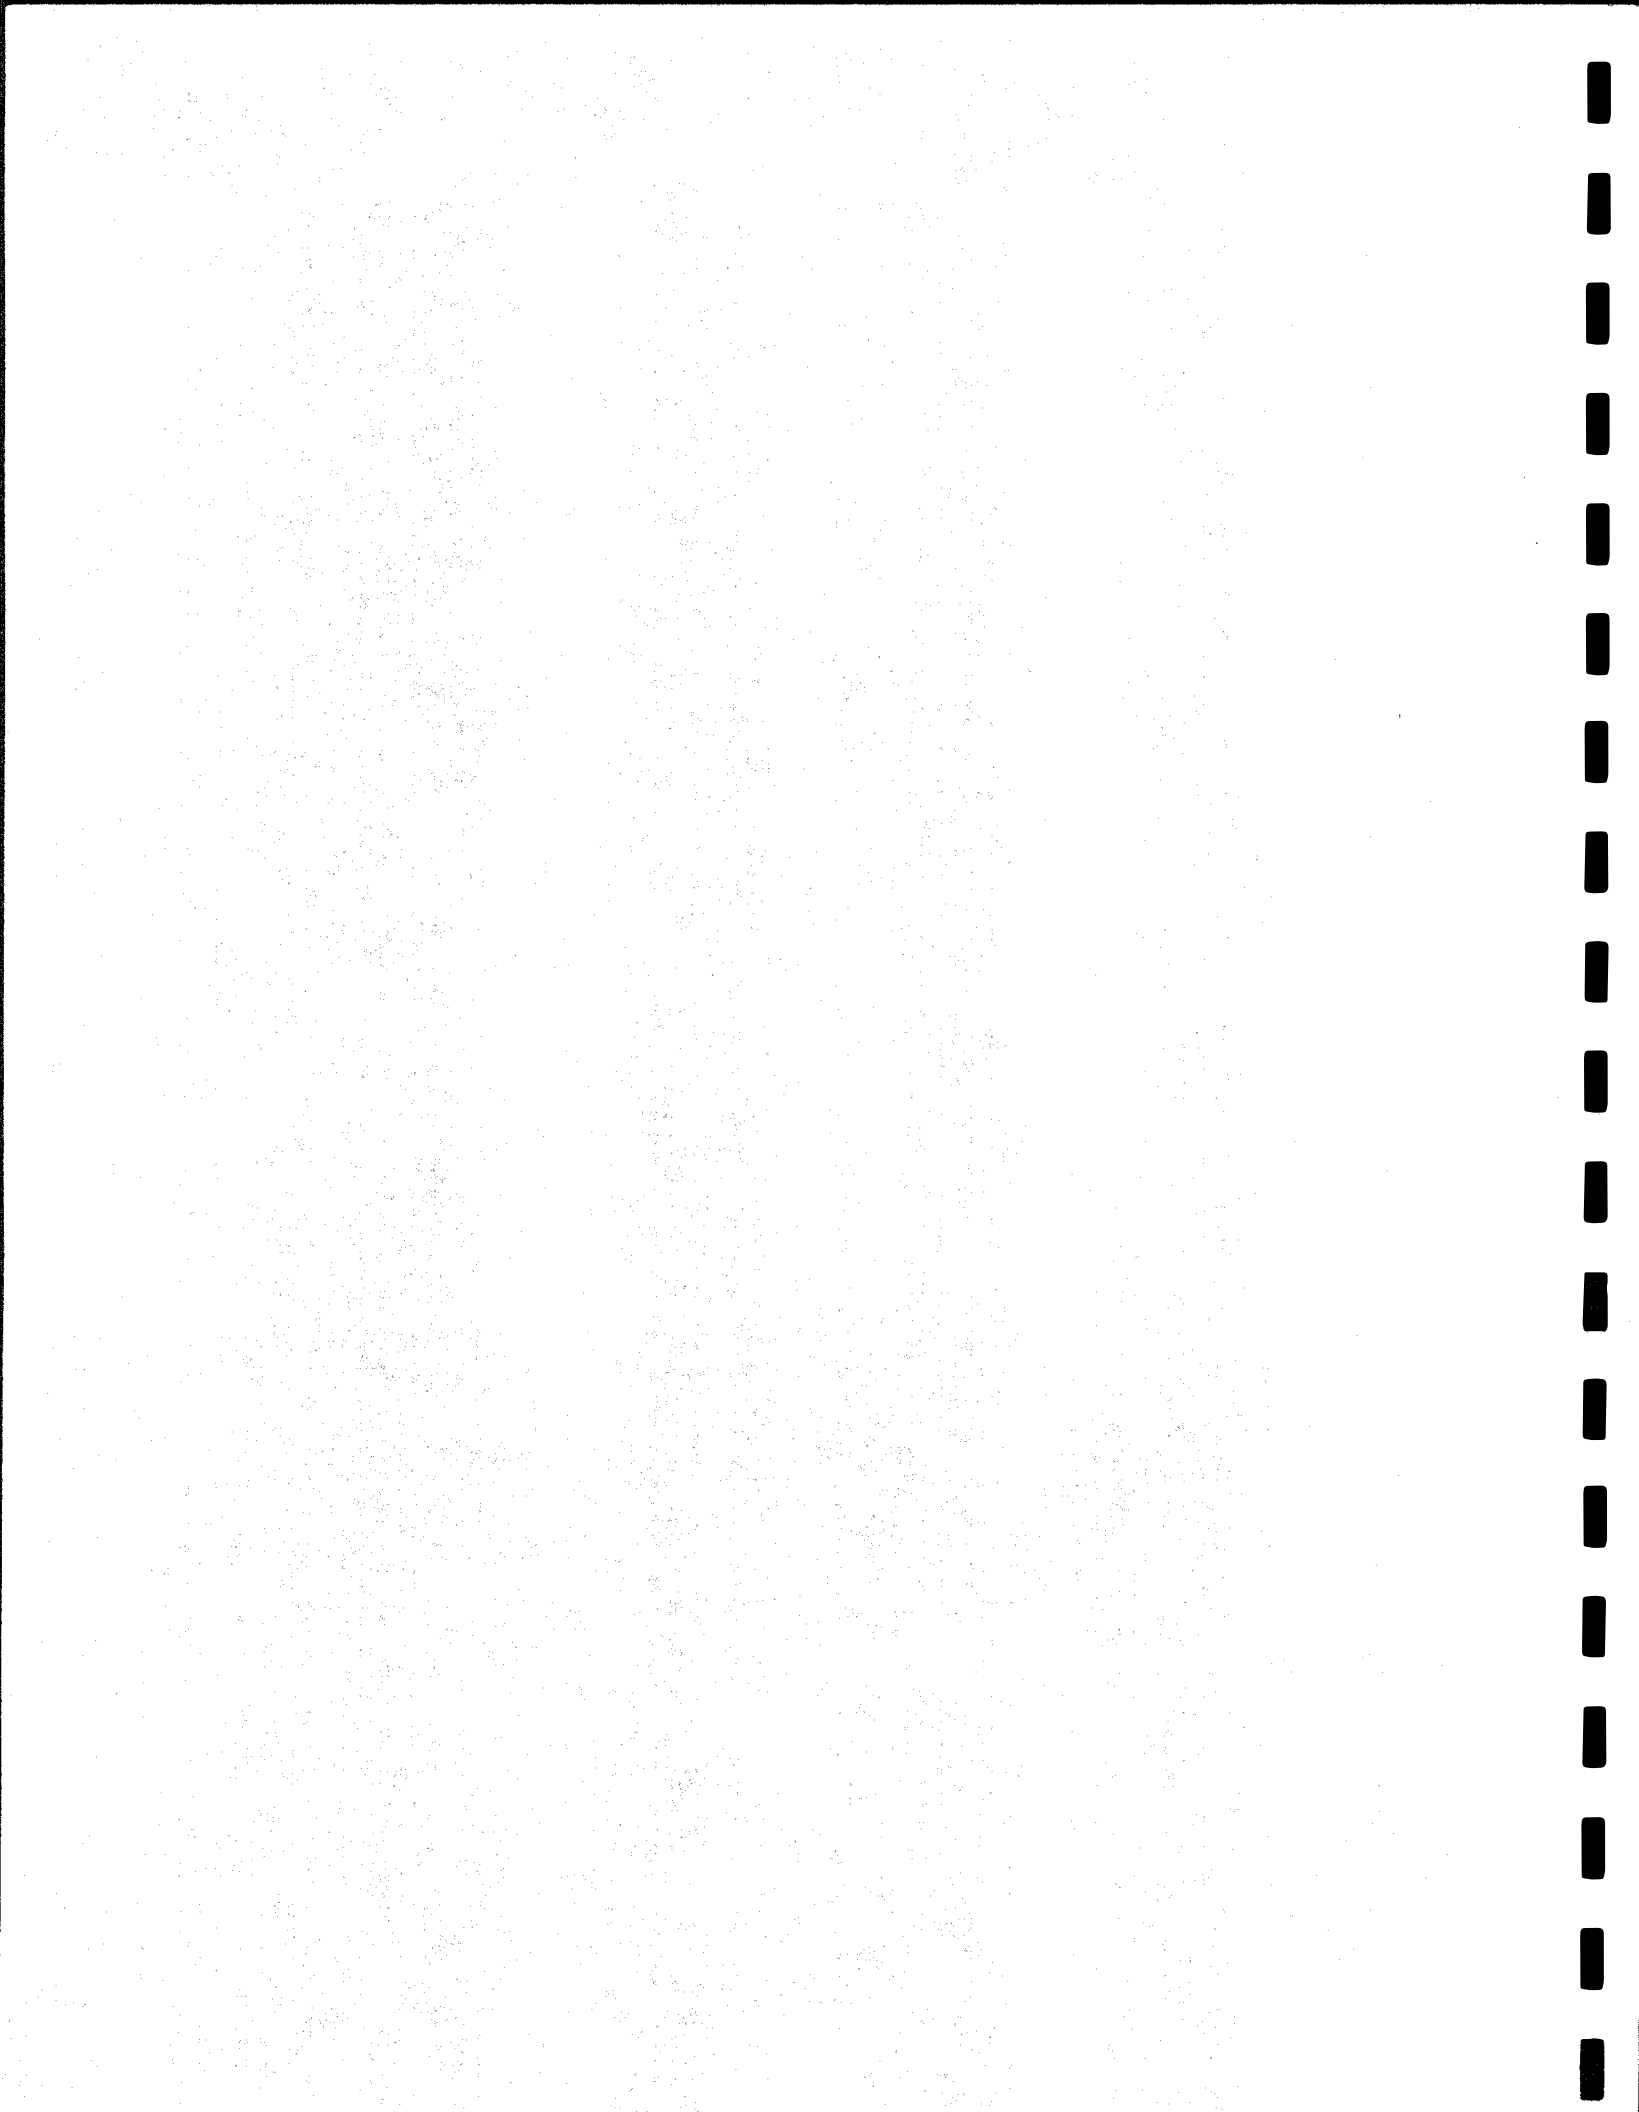

Class 24—Switches

3.24-1

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION		
24000	RAA-RAB	RE 24AA 118 SWITCH, TOGGLE SINGLE POLE - SINGLE THROW, DULL BLACK NICKEL FINISH - SILVER PLATED CONTACTS. CONTACTS RATED 1.0 AMPS, 250 VOLTS DC, 3 AMPS, 125 VOLTS DC.	24008	GENERAL USE	RE 24AA 116 SWITCH - ANTENNA DISCONNECT FOR USE WITH TRANSMITTERS UP TO 2 KW OUTPUT; USES TYPE - 61050 INSULATORS.	CRV 24016	GP	RELAY - POWER DOUBLE POLE - SINGLE THROW COIL: 12 VOLTS D.C.		
8/22/32	CG/49X46	(4562) CRV/K-30066 PT.11	2/16/35	NOV. 41		7/8/35	LEACH #1204	M-409327 NOV. 41		
24001	RAA-RAB	RE 24AA 118 SWITCH, TOGGLE DOUBLE POLE - SINGLE THROW, DULL BLACK NICKEL FINISH - SILVER PLATED CONTACTS. CONTACT RATED 1 AMP 250V DC, 3 AMPS 125V DC. Ø CG/49X48 1GA-2A-21; CDB:SM-1007	24009	GENERAL USE	RE 24AA 116 SWITCH - ANTENNA DISCONNECT FOR USE WITH TRANSMITTERS OVER 2 KW OUTPUT; USES TYPE - 61052 INSULATORS.	CAU 24017	RAG-1&RAH-1	SWITCH LEVER KEY TYPE NORMAL POSITION: 4 CLOSED CONTACTS, POSITION #1: BREAK TWO; POSITION #2: BREAK TWO.		
8/22/32	Ø SEE ABOVE	(4563) CRV/K-30066 PT.12	2/16/35	NOV. 41		8/2/35		CHS/D- 51A-15 NOV. 41		
24002	RAA-RAB	RE 24AA 118 SWITCH, TOGGLE SINGLE POLE - DOUBLE THROW DULL BLACK, NICKEL FINISH - SILVER PLATED CONTACTS. CONTACTS RATED 1 AMP 250V 3 AMP. 150V DC.	CCT 24010	NM-3 & QC-3		CYM 24018	RAG & RAH	SWITCH - PUSH-PULL TYPE SINGLE POLE - DOUBLE-THROW.		
8/22/32	CG/49X47	(4564) CRV/K-30066 PT. 13	3/19/35	34 NOV. 41	CRV/K-823291-1 REV. 0	9/3/35	2003	CHS/D-50W-252 NOV. 41		
24003	RAA-RAB	RE 24AA 118 SWITCH - TOGGLE DOUBLE POLE - DOUBLE THROW, DULL BLACK, NICKEL FINISH - SILVER PLATED CONTACTS. CONTACTS RATED 1 AMP, 250V., 3 AMP. 125 VOLTS DC. ØCHH:20905-6H CRV:K-30066, PT. 14 COL:266N103, REV 3 8/22/32 CG/49X49 *SEE ABOVE MAR. 44 1GA-4C-2Ø	CYM 24011	RAK & RAL		CAU 24019	RAG&RAG-1	SWITCH - LEVER KEY TYPE FOUR POLE - DOUBLE THROW		
24004	GF	NAF #38951 #1124-11	*CRV:K-876716	REV 0	4/25/35	1510 MOD.	CRV/K-815735-1 REV. 0 *SEE ABV	9/11/35	CHS/D-50W-266 NOV. 41	
3/3/33			4/25/35	1515 MOD.	NOV. 41	CRV/K-815735-2 REV. 0	12/20/35	CRV/M-413175-1 NOV. 41		
CYM 24005	DD.1,2,3		CAE 24013	GP		RP- 24021	DD356-408	DD364S67014		
8/28/33		CRV/K-815014 REV. 0	REV/15	8166	NOV. 43	CRV:K-823088-1 REV 1 CHV:18123	6/8/36	NOV. 41		
CRV 24006	DD.1,2,3		CHN 24014	GP		CHZ:SM-1016, REV 0	9/25/36	SPECIAL	CRR/1615-1-A NOV. 41	
9/5/33		(4647) CRV:K-801830 C1 SUB 3	*CRV:K-823087-1	REV 1	COL:262N105, REV 1	7/8/35	3592	*SEE ABOVE		
CBM 24007	QB		CHH 24015	GP		7/8/35	1575	K-818901-1 REV. 1	12/19/39	CHS/D-56520-F REV. 6
2/1/34			2/1/34			2/1/34				

RESTRICTED

NAVSHIPS 900,109

3.24-2

Class 24—Switches

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
COC 24023 LM SWITCH - ROTARY TAP DPDT ROTARY SAME AS 24022 EXCEPT 4-11/16" SHAFT.			RV 24028 * SEE BELOW ENSE SWITCH PDT			24035 SUBMARINES RE 24F FIG SWITCH 4 POSITION ANTENNA SELECTOR SWITCH- (FIRST MADE BY RP)		
9/25/36 SPECIAL NOV. 41	CRR/1615-2-A		DP-4, 5, 6 & DQ-1. 2/22/36 W-302223 OV. 41	M-413229-501		3/5/37 NOV. 41		
COC 24023A LM-4, LM-4A SWITCH, ROTARY TAP; DPDT ROTARY SHAFT LENGTH 5". SAME AS -24023 EXCEPT IMPROVED MATERIAL AND SHAFT LENGTH.			CYM 24029 RAK-2, RAL-2 SWITCH ROTARY TAP ELEVEN POSITION 3/4" SHAFT.			CYM 24036 CRY-35000 SWITCH - ROTARY - TAP SINGLE GANG, 2 CIRCUITS OF 5 CONTACTS EACH.		
12/19/39 AUG. 42	CRR:C-56520-2 REV 0		1/26/37 1211, 11 POINT NOV. 41 MODIFIED	CRY/K-850187-1		10/8/37 1315 MODIFIED AUG. 43	CRY/KX-284036	
COC 24024 LM SWITCH - ROTARY TYPE DPDT ROTARY.			CYM 24029A GENERAL USE SWITCH - ROTARY TAP SAME AS - 24029 EXCEPT 2-3/8" SHAFT.			CAO 24037 QC-7 SWITCH - PUSH BUTTON START STOP, WITH INDICATING LAMP FOR TYPE CAO-21280 MOTOR CONTROLLER STARTER	42RE21J1492A	
9/25/36 SPECIAL NOV. 41	CRR/A2022		3/2/38 1211 NOV. 41			10/14/37 (CBN)766 NOV. 41		
COC 24024A GR & RAP SWITCH - ROTARY TYPE DPDT ROTARY - SAME AS TYPE-24024 EXCEPT IMPROVED COMPONENTS.			CG-24030 T80 & T80-1 SWITCH ANTENNA COUPLING, PA TAP & SEND-RECEIVE; IN ONE FRAME SPECIAL SWITCH ASSEMBLY.			CAE 24038 QC-6 SWITCH-PUSH BUTTON S.P.S.T. NORMALLY CLOSED EMERGENCY STOP BUTTON FOR HOISTING MOTOR.	19RE21J1493A	
1/24/40 SPECIAL AUG. 42	CRR:C-56558-F REV 6		2/8/37 ML-7660058 G1 NOV. 41	T-7660058-1 REV. 6		10/28/37 SPEC 2430 NOV. 41 (CBN)521M		
24025 LM SWITCH TOGGLE DPST TOGGLE, 1 AMP AT 250 VOLT, 3 AMP AT 125 VOLTS, 1/4" NOZZLE LENGTH - 15/32" - 32 THREAD.	RE 24AA 118 FIG 1		CG-24031 T80 & T80-1 SWITCH - ROTARY TAP 3 POSITION, 2 BANK, 4 CIRCUIT; REAR BANK A, FRONT BANK A, FRONT BANK B & REAR BANK B: SINGLE CIRCUIT, 3 POSITION.			CBN 24039 JL-6 SWITCH SINGLE POLE 3 WAY		
9/25/36 CHH/20902 NOV. 41	CRR:A-300-2		2/8/37 ML-7660058 G2 NOV. 41	T-7660058-2 REV. 6		11/22/37 446Q NOV. 41	CBN:SK-3880	
24025A SC-2 SWITCH TOGGLE; DPST TOGGLE SWITCH, CONTACTS RATED 1 AMP AT 250 VAC, 3 AMPS AT 125 VAC. 11/16" SHAFT OTHERWISE SAME AS -24025 SHANK THREAD 15/32" -32.	RE 24AA 118 (CHH)		C-24032 T80&T80-1 SWITCH - ROTARY TAP POSITION, 2 BANK, 3 CIRCUIT; FRONT BANK A, REAR BANK A REAR BANK--SINGLE CIRCUIT, 3 POSITION.			CBN 24040 QC-6, QC-6a SWITCH CHANGE OVER SWITCH.		
CG:K-35J299 REV 0; P-17J325P-4 REV 11 /17/42 CHH:20902-ET @ SEE ABOVE REV. 43			3/8/37 ML-7660058 G3 OV. 41	T-7660058-3 REV. 6		11/24/37 378C NOV. 41		
24026 RAA TOGGLE SWITCH - ROTARY TYPE; SPDT 1 AMP AT 250 V, 3 AMP AT 125 VOLTS (RECLASSIFICATION OF NAVY TYPE -23024).	RE 24AA 118 FIG 4		24033 T80 & T80-1 RE 24AA 118 SWITCH-TOGGLE PDT			24041 ILM-2 & LM-3 RE 24AA 118 SWITCH TOGGLE S.P.S.T. 3 AMPS AT 125 VOLTS, 1 AMPS AT 250 VOLTS.		
10/31/36 (CHH) NOV. 41	CRY DWG:61550		CRY DWG. M-420278-13 REV 13 & DWG. P-7462413, PT 1, REV 3 8/37 CG/49X-6 *SEE ABOVE OV. 41 GA4C1			1/10/38 CG/GA1-A3 AUG. 42	CRY:N-420278- 12-REV. 13	
CYM 24027 * SEE BELOW SWITCH - ROTARY TAP 1 SECTION, 2 POLE, 5 POSITION SWITCH 3/4" SHAFT.			24034 T80 & T80-1 RE 24AA 118 SWITCH - TOGGLE DPDT MOMENTARY CONTACT ON ONE SIDE.			CAE 24041A GQ SWITCH TOGGLE S.P.S.T.; 3 AMP AT 250 VOLTS.		
* DP-4, 5, 6 & DQ-1. 12/22/36 #B-110008 AUG. 43	CRY/M-80871-1		3/8/37 CG:1GA4C12 NOV. 41	CG:M-7462441 PT 1, REV. 4		6/23/38 8295 MOD. NOV. 41	CRR/QB-7799	

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------

Class 24—Switches

3.24-5

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CHH 24079A ZB TOGGLE SWITCH DPST; CONTACTS RATED 6 AMP AT 125 VOLTS 3 AMP AT 250 VOLTS. SAME DIMENSIONS AS 24079; DIFFERENT SHAPE OF LEVER.	10/17/40 81012 NOV. 41	CM:ESO-677306-3 ISSUE C(3)	CG-24092 TAJ-13 POWER TRANSFER SWITCH; FOR SIMULTANEOUS TRANSFER OF POWER CONTROL CIRCUITS FROM ONE MOTOR GENERATOR TO ANOTHER.	2/27/42 NOV. 43	CG:ML-776441701 CG:P-7764419 REV 6	CHH 24080 ZB TOGGLE SWITCH DPST; CONTACTS RATED 6 AMPS AT 125 VOLTS 3 AMPS AT 250 VOLTS.	10/17/40 81009 NOV. 41	CM:ESO-677306-4 ISSUE C(3)
CHH 24081 ZB INTERLOCK SWITCH SPST NORMALLY OPEN; CONTACTS RATED 6 AMPS AT 125 VOLTS. 3 AMPS AT 250 VOLTS.	10/17/40 81075 NOV. 41	CM:ESO-677301-5 ISSUE B(2)	CGC 24085 TBM-4,5,6 LEVER SWITCH 4SPST OPEN NEUTRAL SWITCHES; 2:MAKE & LOCK IN UPPER POSITION & 2:MAKE & NON LOCK IN LOWER POSITION; CONTACTS RATED 2 AMPS AT 125 VOLTS DC OR 10 AMPS AT 125 VOLTS AC.	10/25/40 GCL-1-1-2-2 AUG. 42	CAY:P-7707082-3 SUB. 17	CG 24094 TCN POWER TRANSFER SWITCH; 10 POLE DOUBLE THROW SWITCH. 8 POLES ARE RATED 5 AMPS AT 115 VOLTS 60 CYCLES. ONE RATED .5 AMP AT 600 VOLTS DC & ONE RATED .5 AMP AT 1300 VOLTS DC. PROVIDES POWER TRANSFER BETWEEN TYPE -20122 RECTIFIER AND TYPES 52205 OR -52206 TRANSmitters.	4/29/41 3591 MAR. 45	*CRY:W-305839 P271, REV 7 CRY:W-303337-86 REV. 1 *
CAY 24082 TAB-5 ANTENNA SELECTOR SWITCH SPDT. SAME AS CAY-24145 BUT IS APPROX 1-1/2" LOWER.	10/20/40 AUG. 42	P-7707558 SUB. 0	CGC 24086 TBM-4,5,6 LEVER SWITCH 2 DPST SWITCHES LOCK IN LOWER POSITION NO THROW IN TO UPPER POSITION; CONTACTS RATED 2 AMPS AT 125 VOLTS DC OR 10 AMPS AT 125 VOLTS AC.	10/25/40 GCL-19-19-31-31 AUG. 42	CAY:P-7707082-2 SUB. 17	CHH 24095 TAB-5 TOGGLE SWITCH; SPST ONE BREAK PER CIRCUIT. RATED 10 AMPS AT 125 VOLTS DC. ELECTRICALLY EQUAL TO -24064.	5/1/41 4X728A1 P-7763485 NOV. 41	REV 0
CAY 24083 * SEE BELOW DC- POWER TRANSFER PANEL FOR USE WITH DUPLICATE MOTOR GENERATOR SETS AND CONTROLLERS ON 115, 220 OR 230 VOLTS DC. START-STOP SWITCH IS ON SIDE OF BOX INSTEAD OF DOOR. Ø SUB. 0 AND CAY 7707310 REV. 0. * TBK-11, TBU-1. 10/25/40 T-7607446-C2 NOV. 41 Ø SEE ABOVE	10/25/40 NOV. 41	T-7607446-C2 Ø SEE ABOVE	CGC 24087 TBK-11&TBM-8 LEVER SWITCH 5 POLE DOUBLE THROW - LOCK IN EACH POSITION; CONTACTS RATED 2 AMPS AT 125 VOLTS DC OR 10 AMPS AT 125 VOLTS AC. HAS PHENOLIC CAP ON END OF PLUNGER TO REDUCE BINDING.	3/3/41 GCL-5-5-5-19 AUG. 42	CAY:P-7707082-4 SUB. 17	CHH 24095-A TAB-5 TOGGLE SWITCH SINGLE POLE, DOUBLE THROW. RATED 10 AMP AT 125 V DC. SAME AS -24095 EXCEPT CURRENT CARRYING PARTS ARE TIN-DIPPED, AND ALL OTHER METAL PARTS INCLUDING SWITCH SPRING AND LEVER INTERIOR HAVE NAVY CADMIUM PLATE. BLACK FINISH OVER 8/8/41 8929-QA CAY:P-7706780-1 NOV. 41 REV 6	Ø CG:P-77067301 REV 0, CRY:K-860407-1 5/6/41 8929-DA Ø SEE ABOVE MAR. 42	
SIDES AND BACK ARE ONE PIECE CONSTRUCTION. CABINET IS OF SHEET STEEL.	24083		CAE 24088 NM-14B 19RE21J1552A MASTER SWITCH; INCLUDES INDICATOR LIGHT AND TWO SPST MOMENTARY SWITCHES- ONE NORMALLY OPEN "START" AND ONE NORMALLY CLOSED "STOP". USES APPROVED PHENOLIC. * CBM: 434AQ-SHEET 1 CAE: 3599A 3/19/41 CBM 521S *SEE ABOVE AUG. 42	3/26/41 521 T AUG. 42	CBM:60063 ALT--0	NAVY CADMIUM PLATE ON FRAME. 24095-A UNIT IS ALSO WARMISH TREATED.		
CAY 24084 TAB-5&TBM-6 AC-POWER TRANSFER PANEL FOR USE WITH DUPLICATE MOTOR-GENERATOR SETS AND CONTROLLERS ON 220 OR 440 VOLTS, 3 PHASE, 25 OR 60 CYCLES.	* T-7605042 SUB. 9 & CAY: 7707310 REV 0 10/25/40 * SEE ABOVE NOV. 41		CHH 24089 QCU-5,QCL-4 EMERGENCY STOP SWITCH; SPST NORMALLY CLOSED, SAME AS -24038 EXCEPT THAT A DRIP SHIELD HAS BEEN ADDED TO PREVENT THE ENTRANCE OF MOISTURE BY THE PUSH-BUTTON.	4/23/41 80825 NOV. 41	SKETCH	CHU 24096 YB-1 SNAP ACTION SWITCH SPST NORMALLY CLOSED; MOMENTARY BREAK; ROLLER LEAF TYPE ACTUATOR; MOVEMENT DIFFERENTIAL .01 TO .05".	5/6/41 R-RL2 CG:K-8685150 MAR. 45	
CAY 24084A * SEE BELOW AC POWER TRANSFER PANEL FOR USE WITH DUPLICATE MOTOR-GENERATOR SETS AND CONTROLLERS ON 220 OR 440 VOLTS, 3 PHASE, 25 OR 60 CYCLES. SAME AS BASIC NUMBER EXCEPT THAT START-STOP SWITCH IS ON SIDE OF BOX INSTEAD OF * TBK-11, TBM-8, TBU-1 & 3. 4/18/41 T-7607446-C1 NOV. 41 SUB. 0			CHU 24091 FA & FB SNAP ACTION SWITCH SPST NORMALLY OPEN, MOMENTARY CONTACT; LEAF TYPE ACTUATOR; MOVEMENT DIFFERENTIAL .02 TO .04". RATED 10 AMP, 125 VOLTS AC, 5 AMP 250 VOLTS AC.	4/23/41 G - RL NOV. 41	CATALOGUE	CHU 24097 FB SNAP ACTION SWITCH SPST, NORMALLY OPEN; MOMENTARY CONTACT LEAF TYPE ACTUATOR; MOVEMENT DIFFERENTIAL 0.005 TO 0.02".	5/14/41 YZ-RL8 NOV. 41	CATALOGUE

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------

RESTRICTED

NAVSHIPS 900,109

3.24-6

Class 24—Switches

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CHU 24098 FB			24104A TBL-7			24111 50085		RA 24F 206A
LOCKING TYPE TOGGLE SWITCH DPST CONTACTS RATED 10 AMPS AT 250 VOLTS AC OR 20 AMPS AT 125 VOLTS AC. OPERATED BY CHU TYPE 8965 KEY.			SWITCH LEVER TYPE: NO THROW IN UPPER POSITION. ONE CIRCUIT OF EACH SET OF CONTACTS MAKE IN MID- POSITION. THESE CIRCUITS BREAK BEFORE THE OPPOSITE CIRCUITS MAKE IN LOWER POSITION. 4PDT, CONSISTS OF FOUR SPDT SETS OF CONTACTS - LOCK IN BOTH			LOOP SWITCHING ADAPTER; INCLUDES A DP DT ROTARY SWITCH, FOR ADAPTING LOOP OF DQ SERIES DIRECTION FINDER TO TYPE-50035 LOOP COUPLING UNIT TO PROVIDE LOW FREQUENCY OPERATION.		
5/14/41 9706		1721	2/17/42 CCG:GCL5555		CAY:P-7707082-6	1/15/42 CM:		
NOV. 41		5-9-41	AUG. 42 COM:WB-410126		SUB 17	MAR. 42		
CGC 24099 23211 (TBT)			POSITIONS. CONTACTS RATED 24104A			CAE 24112 SH, SJ, FH		
LEVER SWITCH UPPER TWO SECTIONS, EACH: SINGLE POLE DOUBLE THROW AND SINGLE POLE BREAK; LOCKING. LOWER TWO SECTIONS, EACH: SINGLE POLE; DOUBLE THROW, NON-LOCK. CONTACTS RATED 2A, 110VDC OR 10A, 110 VOLTS AC. ALL CIRCUITS SINGLE BREAK.			2 AMP 110 V DC, OR 10 AMP 110 V AC. BREAKDOWN VOLTAGE 2500 VOLTS. SAME AS TYPE -24104 EXCEPT NO THROW IN UPPER POSITION.			SWITCH, TOGGLE; DPDT MOMENTARY CONTACT ON ONE THROW, SIMILAR TO 8715K2 EXCEPT HAS LONGER HANDLE AND GUN METAL FINISH 20 AMP AT 125 V AC, 35 AMP AT 15 V DC		
7/3/41 GCL-17-17-6-6		CRY:M-421761-1				2/16/42 CR:KS-5911 L.O1		CM:ES-544249
APR. 42		SUB 0				AUG. 43 CAE:3905K582		ISSUE 3
CCT 24100 23211(TBT)			CHH 24105 SJ			CHH 24113 RBM, 1 & 2		
LEVER SWITCH UPPER TWO SECTIONS, EACH: NO CONTACTS, NO THROW, ONE LOWER SECTION IS SINGLE POLE, DOUBLE THROW, NON-LOCK. OTHER LOWER SECTION IS DOUBLE POLE, DOUBLE THROW, NON-LOCK. ALL CIRCUITS SINGLE BREAK.			SWITCH, TOGGLE; SP DT, RATED AT 6 AMP AT 125 V AC.			SWITCH, TOGGLE; SPDT CONTACTS RATED 1 AMP 250 V DC 3 AMP 125 V DC. BODY OF WAX-IMPREGNATED PHENO- LIC PBP OF 17 P 5, STEEL PARTS TO MEET AN-QQ-S-91, TRIGGER FINISHED IN BLACK MOLYBDENUM OR BLACK NICKEL.		
7/3/41 CCT-31-31-6-20		CRY:M-420973-3	11/5/41 80618		CM:ES-682035	3/18/42		CAY:P-7708223-3
APR. 42		SUB4 WITH HANDLE	OCT. 42		ISSUE 2	AUG. 42		SUB 7
CNR 24101 ML			CPX 24106 SJ			CHH 24114 WEA-1		
POWER TRANSFER SWITCH; FOR USE IN SWITCHING POWER FROM EITHER DYNAMOTOR TO RADIO TRANSMITTER.			SWITCH: AUTOMATIC TIME SWITCH FOR 110 VOLTS AC OPERATION. CON- TACTS TO CLOSE ONE CIRCUIT AFTER TIME DELAY. TIME DELAY ADJUSTABLE FROM 0 TO 100 SECONDS. CONTACTS RATED 10 AMPS AT 115 VOLTS AC. PERMANENT STOP AT 60 SEC- ONDS. SIMILAR TO NAVY TYPE 24166			SWITCH TOGGLE: SPDT WITH SLOTTED KNOBS. CONTACTS RATED 3 AMPS AT 115 V AC.		
9/4/41 CNR:395B-23		CNR:395B23-2	11/5/41 810-A		CM:ES-682040	3/2/42 26191A		CRY:K-65661-P2
AUG. 42			MAR. 43		ISSUE 3	AUG. 42		SUB 3
CNR 24102 ML-1			CMO 24107 SJ			CHH 24115 RBM, 1 & 2		
POWER TRANSFER SWITCH; FOR USE IN SWITCHING POWER FROM EITHER DYNAMOTOR TO RADIO TRANSMITTER. INCLUDES AN AUTOMATIC LINE REVERSING RELAY CIRCUIT TO PROVIDE PROPER POLARITY			SWITCH, SNAP ACTION SPST NORMALLY CLOSED, MOMENTARY CONTACT, LEAF TYPE ACTUATOR, MOVEMENT DIFFEREN- TIAL 0.02 TO 0.04" RATED 10 AMP, 125 V AC. 5 AMP, 250 V AC.			SWITCH TOGGLE: SPST CONTACTS RATED 1 AMP 250 V DC 3 AMP 125 V DC. BODY OF WAX- IMPREGNATED PHENOLIC PBP OF 17 P 5, STEEL PARTS TO MEET AN-QQ-S-91, TRIGGER FINISHED IN BLACK MOLYBDENUM OR BLACK NICKEL.		
9/4/41 CHR:395B-20		CNR:395B20-2	11/5/41 R-RL		CATALOG	3/18/42 20994-EZ		CAY:P-7703223-1
AUG. 42			DEC. 41			AUG. 42		SUB 7
CBN 24103 Y8-1			CCT 24108 YE-1			CHH 24116 RBM, -1, -2		
LEVER SWITCH 2-POLE, THREE POSITION, LOCKS IN THE THREE POSITIONS. SUPPLIED WITH STANDARD PUSH-BUTTON TYPE MOLDED KNOB.			LEVER SWITCH; UPPER TWO SECTIONS, SP DT CENTER MAKE, NON LOCK, LOWER TWO POSITIONS SP MAKE, LOCK TYPE.			SWITCH TOGGLE: SPST, CONTACTS RATED 3 AMPS 250 VOLTS DC. BODY OF PHENOLIC PBP OF 17-P-5, STEEL PARTS TO MEET AN-QQ-S-91. SPECIAL SLOTTED TRIGGER ADAPTED TO CAM OPERATION. KEYWAY PROVIDED ON SHANK OPPOSITE THE TERMINALS.		
9/8/41 1452		FORM 62B 6-38	11/18/41 173A		CRY:M-420973-1	3/18/42 20993-CM		CAY:P-7703223-6
DEC. 41			MAR. 42		SUB 2	AUG. 42		SUB 7
- 24104 TBL-5			CHU 24109 YE-1			CHH 24117 RBM, -1, -2		
SWITCH, LEVER TYPE: 4PDT CONSISTS OF FOUR SPDT SETS OF CON- TACTS - LOCK IN ALL POSITIONS. SAME CIR- CUIT OF EACH SET OF CONTACTS MAKE IN MID-POSITION AS MAKE IN SUPERFLUOUS *CRY:M-415987 P15, REV 15, CRY:M-306520- 103 REV 8			SWITCH, SNAP-ACTION; SP-ST NORMALLY OPEN, MOMENTARY CONTACT, PIN TYPE PLUNGER ACTUATOR, MOVEMENT DIFFERENTIAL .002" TO .003" RATED 10 AMP, 125 V AC, 5 AMP 250 V AC.			SWITCH ROTARY: CONSISTS OF ONE -24116 AND ONE -24125 TOGGLE SWITCH, MOUNTING BRACKET, AND TWO CAMS (TO OPER- ATE SWITCHES) AFFIXED TO CONTROL SHAFT. SWITCH OPERATION IS AS FOLLOWS: SHAFT COUNTER-CLOCKWISE, PANEL SWITCH OPEN AND REAR SWITCH OPEN; SHAFT AT CENTER POSI- 3/18/42 1571-AT		CAY:P-7703223-2
9/24/41 CCG:GCL 5555		CAY:P-7707082-5	11/19/41 YZ-R		CRY:K-864270-1	AUG. 42		SUB 7
MAR. 45 COM-2		SUB 17 *	MAR. 42		SUB 1			
			CHH 24110 YE-1			CHH 24117		
			INTERLOCK SWITCH: SPST DOUBLE BREAK NORMALLY OPEN. CON- TACTS RATED 3 AMP AT 250 V AC OR DC, 6 AMP AT 125 V AC OR DC, PLUNGER DEPRESSES 1/4" TO OPERATE, RETURNS 3/8" TO OPEN. SAME AS TYPE -24076 EXCEPT FOR ORIENT- ATION OF PLUNGER ROLLER.			TION, PANEL SWITCH CLOSED AND REAR SWITCH OPEN; SHAFT AT CLOCKWISE POSITION PANEL SWITCH CLOSED AND REAR SWITCH CLOSED, THROW: 67-1/2° FROM CENTER.		
			11/19/41 2023-E		CRY:K-818833-1			
			APR. 42		SUB 5			

Class 24—Switches

3.24-7

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CAE 24118	RBM.-1.-2	SWITCH TOGGLE: SPST. RATED 25 AMPS CONTINUOUS AT ANY VOLTAGE (15 TO 125 VOLTS). CURRENT MAKING CAPACITY, 65 AMPS AT 15 VOLTS DC, 45 AMPS AT 30 VOLTS DC, 30 AMPS AT 125 VOLTS AC. CURRENT BREAKING CAPACITY 40 AMPS AT 15 VOLTS DC, 17 AMPS AT 30 VOLTS DC, 13 3/25/42 8801K3 CAY:P-7708397 JUNE 42 .SUB 1	CAE 24122	WEA-2	MASTER SWITCH; INCLUDES INDICATOR LIGHT AND TWO SPST MOMENTARY CONTACT SWITCHES, ONE NORMALLY OPEN "START" AND ONE NORMALLY CLOSED "STOP". USES NAVY APPROVED PHENOLIC. SAME AS CAE-24038 EXCEPT THAT DRIP-PROOF SHIELDS HAVE BEEN ADDED. CASE MATERIAL IS BRONZE 4/16/42 CBM:521V CBM:60135 AUG. 42 ALT 0	CGT-24128	QBE-1	LINE SWITCH: TWO POLE, SINGLE THROW, RATED 30 AMP 250 VOLTS, 2 HP MAX., 230V AC, 5 HP MAX., 250V DC, HANDLE OPERATED TYPE. TYPE NUMBER DOES NOT INCLUDE FUSES; FUSED FOR 115 VOLTS AC OR DC. RCBI: TYP: 446V (CSP DW: SK-5057 ALT 0) 6/20/42 CGT:CAT. NO. *SEE ABOVE AUG. 44 92221
CAE 24118		AMPS AT 125 VOLTS AC NON-INDUCTIVE LOAD; 20 AMPS AT 15 VOLTS DC, 13 AMPS AT 30 VOLTS DC, 13 AMPS AT 125 VOLTS AC INDUCTIVE LOAD. METALLIC PARTS TO WITHSTAND AN-Q0-S-91, PHENOLIC IN ACCORDANCE WITH 17 P 4.	CG 24123	SE	START STOP SWITCH: TWO SPST MOMENTARY TYPE SWITCHES ONE NORMALLY OPEN AND ONE NORMALLY CLOSED. 4/16/42 CW:KS-5918 CW:ES-800284 JUNE 42 LIST 04 & 05 ISSUE 1	CGT 24129	QBE-1	LINE SWITCH: TWO POLE, SINGLE THROW, RATED 30 AMPS, 250 VOLTS, 2 HP MAX., 230 VOLTS AC, 5 HP MAX., 250 VOLTS DC, HANDLE OPERATED TYPE, FUSED FOR 32-56 VOLTS DC. * C3M:SK-5056 ALT 0 5/20/42 CGT:52222 * SEE ABOVE AUG. 44 CBM:446W
CAE-24118-A	TCS-9	SWITCH TOGGLE: SPST RATED 50 AMPS CONTINUOUS AT ANY VOLTAGE (15 TO 125 VOLTS). CURRENT MAKING CAPACITY 80 AMPS AT 15 VOLTS DC 60 AMPS AT 30 VOLTS DC, 40 AMPS AT 125 VOLTS AC. CURRENT BREAKING CAPACITY 45 AMPS AT 15 VOLTS DC, 25 AMPS, AT 30 VOLT 3/21/44 8801K4 (COL)2264104 AUG. 44 REV 4	CGC 24124	SH	LEVER SWITCH: 4 POLE SWITCH, LOCK IN LOWER POSITION, NON-LOCK IN UPPER POSITION. UPPER AND LOWER SECTIONS EACH CONSIST OF ONE SPST NORMALLY OPEN AND ONE SPST NORMALLY CLOSED SET OF CONTACTS. CONTACTS RATED 10 AMPS AC, 2 AMPS DC, 125 VOLTS. 4/17/42 GCL-2-4-1-3 CW:ESL-682073-1 SEPT 43 ISSUE 1	CGV 24130	* SEE BELOW	ALTITUDE LIMIT INDICATOR SWITCH: MOUNTED IN AN METER CASE, HAS SETTING FOR 50,75,100,125,150,175,200, 225,250,275 AND 300 FEET. * AYD,AYD-1,AYD-2 6/17/42 AUG. 42 CRV:P-255295 REV 2
CAC-24110-A		DC, 15 AMPS, AT 125 VOLTS AC, NON-INDUCTIVE LOAD, 25 AMPS AT 15 VOLTS DC 15 AMPS AT 30 VOLTS, DC 15 AMPS AT 125 VOLTS AC INDUCTIVE LOAD. METALLIC PARTS TO WITHSTAND AN-Q0-S-91, PHENOLIC IN ACCORDANCE WITH 17-P-4. SAME AS -24118 EXCEPT FOR RATINGS.	CHH 24125	RBM.-1.-2	SWITCH, TOGGLE: SPST. CONTACTS RATED 3 AMPS 250 VOLTS DC. BODY OF PHENOLIC PDP OF 17 P 5, STEEL PARTS TO MEET AN-Q0-S-91. SPECIAL SLOTTED TRIGGER ADAPTED TO CAM OPERATION. KEYWAY PROVIDED ON SHANK ON SAME SIDE AS TERMINALS. 5/1/42 20993-CN CAY:P-7708223-8 AUG. 42 SUB 7	CGK 24131	SC-2	SWITCH TOGGLE: MOMENTARY CONTACT TOGGLE SWITCH. DPST (DPST SWITCH WIRED FOR DPST). MOMENTARY DOWN, CENTER OFF, LOCKED UP, CONTACTS RATED 20 AMPS, 125 V AC. MEETS PERFORMANCE REQUIREMENTS OF RE 24AA 118. HAS LUMINOUS TIP ON END OF HANDLE. 6/17/42 CAE:83078 CG:K-34J695 REV 1 OCT. 42 I SPEC:R1076
CG 24119	ACCES-DP-15	SWITCH, PUSH BUTTON: DPDT, INTERRUPTING CAPACITY OF EACH CONTACT, 5 AMP AT 600 V AC, 30 AMPS AT 110 V AC. CONTACTS TO CARRY 10 AMPS CONTINUOUS.	CAE 24126	GENERAL USE	START STOP SWITCH: 2 BUTTON, START AND STOP PUSH BUTTON SWITCH, ONE SPST NORMALLY OPEN, ONE SPST NORMALLY CLOSED, WATERPROOF WITH PHENOLIC CASE. 5/8/42 6960 B-86-418 OCT. 42	CHH 24132	SC-2	SWITCH-PUSH BUTTON: SINGLE CIRCUIT, NORMALLY OPEN, MOMENTARY CONTACT. CONTACTS RATED 3 AMPS AT 250 V AC. BUSHING 1/2" LONG 15/32" -32 THDS. SIMILAR TO -24014. 6/17/42 CHH:83592-D CG:K-7874430 OCT. 42 REV 5
4/26/42	CR 2940XA4	CRV:M-422644-1 SUB 1	CSR 24120	ACCES-DP-15	SWITCH: ROTARY THROW TYPE WITH RECIPROCATING MECHANISM. WATER TIGHT HOUSING. HAS TWO MOUNTING EARS EACH WITH 11/32" MOUNTING HOLE. FOR BULKHEAD MOUNTING. CONTACTS RATED 10 AMPS 250 VOLTS DC. 4/26/42 1520 CRV:K-875513-1 AUG. 42 SUB 1	CAE 24127	WCA	MASTER SWITCH: WATER TIGHT, PUSH BUTTON TYPE, TWO BUTTONS, ONE NORMALLY OPEN "START" AND ONE NORMALLY CLOSED "STOP". INCLUDES WINDOW AND SOCKET FOR INDICATING LIGHT. ELECTRICALLY EQUIVALENT TO -24068 BUT SINCE CASE IS PHENOLIC THE DIMENSIONS DIFFER. 5/19/42 CBM:521V CBM:60107 SUG.-42 CAE:C86-421 ALT 2
CHH 24121	RBM.-1.-2	SWITCH ROTARY: CONSISTS OF ONE -24116 AND ONE -24125 SWITCH, MOUNTING BRACKET, AND TWO CAMS (TO OPERATE SWITCHES) AFFIXED TO CONTROL SHAFT. SHAFT OPERATION IS AS FOLLOWS: SHAFT COUNTER CLOCKWISE, PANEL SWITCH AND REAR SWITCH OPEN; SHAFT AT CENTER POSITION, PANEL SWITCH CLOSED AND REAR SWITCH CLOSED. THROW 67-1/2° FROM CENTER. SAME AS CHH-24117 EXCEPT THAT CONTROL SHAFT FLATS ARE ROTATED 180°.	CHH 24121		SITION, PANEL SWITCH CLOSED AND REAR SWITCH OPEN, SHAFT AT CLOCKWISE POSITION PANEL SWITCH CLOSED AND REAR SWITCH CLOSED. THROW 67-1/2° FROM CENTER. SAME AS CHH-24117 EXCEPT THAT CONTROL SHAFT FLATS ARE ROTATED 180°.	CHH 24133	SC-2	SWITCH-PUSH BUTTON: SINGLE CIRCUIT, NORMALLY CLOSED, MOMENTARY BREAK, CONTACTS RATED 3 AMPS AT 250 VOLTS AC. BUSHING 1/2" LONG 15/32" -32 THREADS. SAME AS -24132 EXCEPT NORMALLY CLOSED. SIMILAR TO -24061. 6/17/42 CHH: CG:K-7879737-1 OCT. 42 REV 0
CHH 24121	RBM.-1.-2	SWITCH ROTARY: CONSISTS OF ONE -24116 AND ONE -24125 SWITCH, MOUNTING BRACKET, AND TWO CAMS (TO OPERATE SWITCHES) AFFIXED TO CONTROL SHAFT. SHAFT OPERATION IS AS FOLLOWS: SHAFT COUNTER CLOCKWISE, PANEL SWITCH AND REAR SWITCH OPEN; SHAFT AT CENTER POSITION, PANEL SWITCH CLOSED AND REAR SWITCH CLOSED. THROW 67-1/2° FROM CENTER. SAME AS CHH-24117 EXCEPT THAT CONTROL SHAFT FLATS ARE ROTATED 180°.	CAE 24128	QBE-1	TRANSFER SWITCH: ROTARY TYPE, CONTINUOUS CLOCKWISE ROTATION, SWITCHES TO INDICATOR, THEN RECORDER, AND REPEAT. RATED 10 AMPS AND 250 VOLTS. 6/21/42 CSR:469 CBM:3780 ALT 0 OCT. 42 CBM:3780	CHH 24134	QFB	TRANSFER SWITCH: ROTARY TYPE, CONTINUOUS CLOCKWISE ROTATION, SWITCHES TO INDICATOR, THEN RECORDER, AND REPEAT. RATED 10 AMPS AND 250 VOLTS. 6/21/42 CSR:469 CBM:3780 ALT 0 OCT. 42 CBM:3780
CHH 24121	RBM.-1.-2	SWITCH ROTARY: CONSISTS OF ONE -24116 AND ONE -24125 SWITCH, MOUNTING BRACKET, AND TWO CAMS (TO OPERATE SWITCHES) AFFIXED TO CONTROL SHAFT. SHAFT OPERATION IS AS FOLLOWS: SHAFT COUNTER CLOCKWISE, PANEL SWITCH AND REAR SWITCH OPEN; SHAFT AT CENTER POSITION, PANEL SWITCH CLOSED AND REAR SWITCH CLOSED. THROW 67-1/2° FROM CENTER. SAME AS CHH-24117 EXCEPT THAT CONTROL SHAFT FLATS ARE ROTATED 180°.	CNR 24135	ML-2	POWER TRANSFER SWITCH: FOR USE IN SWITCHING POWER FROM EITHER DYNAMOTOR TO RADIO TRANSMITTER, INCLUDES AN AUTOMATIC LINE REVERSING RELAY CIRCUIT TO PROVIDE PROPER POLARITY. SAME AS CNR-24102 EXCEPT FOR RELAY AND RECTIFIER TUBE USED. 7/8/42 CNR:3958L-20 AUG. 42			

RESTRICTED

NAVSHIPS 900,109

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
-----------------------	--------------------	-------------------------------	-----------------------	--------------------	-------------------------------	-----------------------	--------------------	-------------------------------

CHR 24174 CAY-23304
 ROTARY SWITCH; CONSISTS OF TWO TYPE-24173 TOGGLE SWITCHES MOUNTED ON A FRAME AND OPERATED BY A SHAFT BY CAM ARRANGEMENT. OPERATION IS AS FOLLOWS: WITH SHAFT AT COUNTERCLOCKWISE POSITION CIRCUITS 1 AND 2 OF FRONT SWITCH ARE OPEN AND CIRCUITS 1 AND 2 OF 1/6/43 1571-AX CAT:P-7708944-4 MAY 43 REV 0

CHR 24174
 REAR SWITCH ARE CLOSED. WITH SHAFT AT CLOCKWISE POSITION CIRCUITS 1 AND 2 OF FRONT SWITCH ARE CLOSED AND CIRCUITS 1 AND 2 OF REAR SWITCH ARE OPEN. THROW OF SWITCH: 33-3/4° EITHER DIRECTION.

CAO 24175 QBF
 SWITCH, PUSH BUTTON: 2 BUTTONS, EACH RATED 2 AMPS AT 440 V 60 CY, 5 AMPS AT 220 V 60 CY, OR 1 AMP AT 220 V DC. CONSISTS OF TWO SINGLE POLE DOUBLE THROW SWITCHES. PHENOLIC HOUSING, DUST PROOF, MOISTURE PROOF.
 *CM:ESX-652679 ISSUE 3
 1/8/43 CAO:MN-2203 CW:ESX-641269 AUG. 44 ISSUE 1.*

CAO 24176 QBF
 SWITCH, PUSH BUTTON: 3 BUTTONS, EACH RATED 2 AMPS AT 440 V, 60 CY, 5 AMPS AT 220 V 60 CY, OR 1 AMP AT 250 V DC. CONSISTS OF THREE SINGLE POLE DOUBLE THROW SWITCHES. PHENOLIC HOUSING, DUST PROOF, MOISTURE PROOF.
 *CM:ESX-652679 ISSUE 3
 1/8/43 CAO:MN-2303 CW:ESX-641269 AUG. 44 ISSUE 1.*

CG-24177 QCS, QCT 6RE21J1581
 MASTER SWITCH: WATERPROOF PHENOLIC START-STOP PUSH BUTTON STATION WITH AN INDICATING LIGHT. CONTACT RATING, 10 AMPERES CONTINUOUS, INTERRUPTING CAPACITY AN 115 VOLTS DC 2 AMPERES.
 1/25/43 DL2880141055 CBN:934 ALT 0 AUG. 44 CBN:936 CG:11K2201 REVO

CHU 24178 MARK 19
 SNAP ACTION: SPST, NORMALLY OPEN, CONTACTS RATED 10 AMPS AT 125 VAC OR 5 AMPS AT 250 VAC. PANEL-MOUNT; MOVEMENT DIFFERENTIAL LESS THAN 0.0005; OPERATING PRESSURE 7 TO 9 OUNCES. PRESSURE DIFFERENTIAL 1 TO 3 OUNCES. OVERTRAVEL 7/32".
 1/30/43 CHU:YZ-RQ1 CRV:K-876185-1 AUG. 45 SUB 4.

CUM 24179 PD-1
 SNAP ACTION SWITCH: SPDT CONTACTS RATED 110 V AT 10 AMPS AC AND 110 V AT 1 AMP DC. LEAF-SPRING ACTUATOR. OPERATING PRESSURE 2 TO 3 OUNCES, DIFFERENTIAL PRESSURE 1 TO 2 OUNCES, DIFFERENTIAL MOVEMENT 0.010" MIN OVERTRAVEL 1/16".
 2/5/43 CUM:MBL-25 CATALOGUE MAY 43 CCS:8-363

CUM 24180 PD-1
 SNAP ACTION SWITCH: SPST, NORMALLY CLOSED, CONTACTS RATED 110 V AT 10 AMPS AC AND 110 V AT 1 AMP DC LEAF-SPRING ACTUATOR. OPERATING PRESSURE 2 TO 3 OUNCES, DIFFERENTIAL PRESSURE 1 TO 2 OUNCES, DIFFERENTIAL MOVEMENT 0.010" MIN., OVERTRAVEL 1/16".
 2/5/43 CUM:MBL-25 CATALOGUE MAY 43 CCS:8-362

CHP 24181 MARK 9
 TIMER SWITCH: INPUT: 110/1/60. MAXIMUM CURRENT 0.05 AMP. CONSISTS OF A SYNCHRONOUS MOTOR AND A LIMITED MOTION SNAP ACTION SWITCH. MOTOR TO OPERATE SWITCH BETWEEN 15 AND 16 SECONDS AFTER MOTOR IS ENERGIZED. SWITCH BACK TO NORMAL BETWEEN 2 AND 3 2/5/43 CW:KS-8708 MAY 43 LIST #3

CHP 24181
 SECONDS AFTER MOTOR IS DE-ENERGIZED.

CG-24182 -55ACC
 ROTARY SWITCH: SPST RATED 125 V, 6.0 AMP AC OR DC. SIMILAR TO RE24A118. TUMBLER TYPE.
 2/21/43 CG:1GA7A8 K35J89-1 MAY 43 REV 1

CTC 24183 -55ACC
 ROTARY SWITCH: SPST RATED 125 V, 5.0 AMP AC. TUMBLER TYPES.
 2/21/43 CTC:2287 CG:K35J896-2 REV 1

CAE 24184 SN
 SWITCH, TOGGLE: SPST, MOMENTARY OFF. CONTACTS RATED 30 AMP 24 V AC AND 5 AMP AT 125 V AC. HAS LUMINOUS LENS IN HANDLE.
 2/24/43 CAE:8213 CG:K43J278 MAY 43 REV 1

CG-24185 OS-2
 SWITCH, TOGGLE: SPST, ONE BREAK PER CIRCUIT. CONTACTS RATED 3.0 AMP AT 250 V.
 *EXCEPT SILVERED CONTACTS
 3/5/43 CG:1GA2A5 V-8056082-2 MAY 43 *SEE ABOVE REV 0

CG-24186 OS-2
 SWITCH, TOGGLE: SPST, ONE BREAK PER CIRCUIT. CONTACTS RATED 3.0 AMP, 250 V.
 *EXCEPT SILVERED CONTACTS
 3/5/43 CG:1GA1A5 V-8056082-1 MAY 43 *SEE ABOVE REV 0.

CG-24187 OS-2
 SWITCH, TOGGLE: SPST, ONE BREAK PER CIRCUIT. CONTACTS RATED 3.0 AMPS, 250 V.
 *EXCEPT SILVERED CONTACTS
 3/5/43 CG:1GA4C8 V8056082-3 MAY 43 *SEE ABOVE REV 0

CG-24188 OS-2
 SWITCH, PUSH BUTTON: SPST, TWO BREAKS PER CIRCUIT. CONTACTS RATED 3.0 AMP, 125 V. MOMENTARY CONTACT.
 *EXCEPT SILVERED CONTACTS
 3/5/43 CG:1GA13A4 V-8056084 MAY 43 *SEE ABOVE REV 0

CG-24189 SC-3
 SWITCH, TOGGLE: DPDT, 1.0 AMP AT 250 V, 3 AMPS AT 125 VOLTS LUG TERMINALS. SAME AS TYPE -240418 EXCEPT FOR POLES AND THROWS.
 *CBM:716-121 ALT 1
 3/10/43 CG:1GA4C36 K-7889541 MAR. 45 CHH:20905 REV 0 *

CAE 24190 QBF
 SWITCH, TOGGLE: SPDT CONTACTS RATED 20 AMP, 24 V.
 3/10/43 CAE:8744 A-90-369 MAY 43

CAE 24191 QBF
 SWITCH, TOGGLE: SPST CONTACTS RATED 30 AMP AT 24 V AND 6 AMP AT 126 VAC.
 3/10/43 CAE:8201 42-K1-6 MAY 43

CHH 24192 QBF
 SWITCH ROTARY: DPDT CONTACTS RATED 3.0 AMP AT 250 V.
 3/10/43 CHH-1575-EH CHH:1575-EH MAY 43

CHH 24193 QBF
 SWITCH, TOGGLE: DPST, CONTACTS RATED 30 AMP 375 VDC, 30 AMP 500 V AC.
 3/10/43 CHH:7894 CHH:7894 MAY 43

CHH 24194 QBF
 SWITCH, TOGGLE: DPDT, CONTACTS RATED 3.0 AMPS, 250 V, 6.0 AMP 125 V.
 3/10/43 CHH:81027-FC CH:ESR-676000-19 DEC 44 81027-FP REV 0

CG-24195 SC-3
 SWITCH-PUSH BUTTON: SINGLE CIRCUIT, NORMALLY OPEN, MOMENTARY CONTACT. CONTACTS RATED 3.0 AMP AT 250 V AC. SIMILAR TO TYPE- 24152.
 *CG:K-7870464, REV 9
 3/10/43 CG:1GA19A30 K-7889742 MAY 45 REV 0 *

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------

Class 24—Switches

3.24-11

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CDM24196 SG			CAE 24204 GENERAL USE			CHH 24209 SH		
SWITCH-TOGGLE: 3PST. CONTACTS RATED: 110 VAC, 10.0 AMP. 3 POSITION, ONE NON-LOCKING, 2 LOCKING. SIMILAR TO TYPE-24138.			LINE SWITCH: CONTACT RATING: 30 AMP, 250 V AC, 2 POLE, SINGLE THROW, MANUAL, DRIP-PROOF.			SWITCH-TOGGLE: DPST; CONTACTS RATED 12 AMP AT 125 V AC. SIMILAR TO 24066 AND 24066A		
3/19/43 CDM:R-4101-Z1 CRP:DUC28-5052 MAY 43 MODIFIED SUB 4			FIRST PURCHASE: NXSS-25282 4/6/43 CAE:4115H4M0D CAE:82005X1 MAY 43 CAE:82002Y1			4/7/43 CHH:80600-AP CG:K43J250-2 MAY 43 REV 1		
CDM24197 SG			CAE 24205 PE-1			CAU 24210 -23211&-23172		
SWITCH-TOGGLE: SPST. CONTACTS RATED: 110 V AC, 10.0 AMPS 2 POSITIONS, ONE LOCKING, ONE NON-LOCK- ING. SIMILAR TO TYPE-24139.			SWITCH TOGGLE: SPST, FOUR BREAK (SERIES). RATED 10 AMPS 125 V, 5 AMPS, 230V AC.			SWITCH-CAM LEVER: THREE POSITION. SECTION 1: DPST, NON LOCK SECTION 2: SPST NON LOCK. CONTACTS RATED 3 AMPS, 150 WATTS PER SET OF CONTACTS. OVER ALL BREAKDOWN RATING IS 500 VOLTS.		
3/19/43 CDM:R-4101-Z3 CRP:DUC28-5053 MAY 43 MODIFIED SUB 3			4/21/43 CAE:8160 CHX:18123 REV 0 NOV. 43			4/7/43 CAU:D321238 COT:P-1581A AUG 43		
CAE 24198 RBF-3			CYP 24206 GEN USE RE 24F 146			CUM 24211 SN-1		
SWITCH TOGGLES: SPST CONTACTS RATED: 125 VOLTS, 5 AMPS.			ANTENNA DISCONNECT SWITCH; RATED 7500 V AT 200 AMPS SPDT. CONSISTS OF AN ARM WHICH IS LOCKED INTO CIRCUIT BY SPRING DETENTS, 2 TYPE -61175-A IN- SULATORS AND A BASE PLATE. SAME AS CYP- 24158-A EXCEPT FOR INSULATORS.			SWITCH-SNAP ACTION: SPST NORMALLY CLOSED. RATING 8.0 AMPS, 125 V DC INDUCTIVE, AT SEA LEVEL, 5.0 AMPS, 125 V DC INDUCTIVE AT 40,000 FT., OPERATING PRESSURE IS 16 - 28 OZ DIFFER- ENTIAL PRESSURE IS 8-14 OZ. DIFFERENTIAL *CG:K-43882 REV 1, CDM:746-111, ALI 0 5/11/43 CUM:TYPE DXR *SEE ABOVE FEB. 45		
3/23/43 CAE:8201K5 CWQ:2A260 AUG. 44 (LESS LUMINOUS TIP)			4/27/43 B-440 CYP:B-440 NOV. 43 AND S-(24)			CUM 24211		
CHH 24199 OAA-2			CCX 24207 MARK 8			MOVEMENT 1/16.		
SWITCH-TOGGLE: SPST. CONTACTS RATED 3 AMP AT 250 V.			SWITCH-TIME DELAY: CONTACTS RATED 125 V, 60 CY, 15 AMPS. MOTOR RATED 115 V, 60 CY, 450RPM. PRESET FOR 60 SEC ±10% TIME DELAY. SWITCH TO BE MU-SWITCH CORP TYPE MBS-Z SPDT HAVING NORMALLY OPEN CONTACTS. TO BE USED AS AN ALTERNATE FOR TYPE -24166 SWITCH HOWEVER 4/30/43 CH:KS-10149 CCX:84794 REV 0 AUG. 43 LIST 2					
3/25/43 CHH:20992-BY CHH DWG IN FILE AUG. 44 CFE:45.178 RE-ISSUE A			NOT INTERCHANGEABLE.					
CHH 24200 SM			CCX 24207			CHH 24212 DAS		
SWITCH-TOGGLE: TWO CIRCUIT, SPDT; EACH CIRCUIT SPST. CONTACTS RATED 1 AMP AT 250 V AC, 3 AMP AT 125 V AC.						SWITCH, PUSH BUTTON: DPST PUSH BUTTON SNAP ACTION SWITCH. CONTACT RATING: 1 AMP, 250 V, 60 CY, 3 AMPS, 125 V, 60 CY.		
4/3/43 CG:K43J116-1 MAY 43 REV. 1						5/11/43 CHH:CAT#3594-D CG:K44J859 SEPT 43 REV 0		
CHH 24201 SM			CCX- 24207-A MARK 8			CHH 24213 DAS		
SWITCH-TOGGLE DPST. CONTACTS RATED 12 AMP AT 125 V AC.			SWITCH-TIME DELAY CONTACTS RATED 125 VOLTS, 60 CYCLES, 15 AMPS. MOTOR RATED 115V, 60 CYCLES, 450 RPM. PRESET FOR 60 SEC. ± 10% TIME DELAY. SWITCH TO BE MU-SWITCH CORP TYPE MBS-Z. SPDT HAVING NORMALLY OPEN CONTACTS. TO BE USED AS AN ALTERNATE FOR TYPE -24166 6/23/44 (CH)KS-10149 (CCX)84-794 OCT. 44 LIST 5 REV 0			SWITCH, TOGGLE: DPST. CONTACTS: 1 AMP, 250 V, 60 CY; 3 AMPS, 125 V, 60 CY.		
4/3/43 CG:K43J250-1 MAY 43 REV 1						#CHZ:SH-1010 REV A 5/11/43 CHH:20905-GP CG:K44J420-3 SEPT 43 REV 0 #		
CAE 24202 SM			CCX- 24207-A			CHU 24214 *GEN USE		
SWITCH-TOGGLE: 3 POSITION, 1 CIRCUIT. DOWN IS MOMENTARY CLOSED; CENTER POSITION IS OFF; UP POSITION IS CLOSED. CONTACTS RATED 30 AMP AT 24 V AC, 5 AMP AT 125 V AC. LUMINOUS TIP ON HANDLE.			SWITCH, HOWEVER NOT INTERCHANGEABLE. SAME AS -24207 EXCEPT HAS AN ADDED LEAD AND USES AN IMPROVED MOTOR.			SWITCH-SNAP ACTION: SINGLE POLE SINGLE THROW, NORMALLY OPEN. CONTACTS RATED 10 AMP AT 125 V AC OR 5 AMP AT 250 V AC. MOVEMENT DIFFERENTIAL 0.0007 INCH OR UNDER; OPERATING PRESSURE UNDER 7 OUNCES; PRESSURE DIFFERENTIAL *FIRST PURCHASE: NXSS-21690 5/22/43 YZ-RS8 CRV:M-440261-5 SEPT 43 SUB 1		
4/3/43 CAE:8208 CG:K43J289 MAY 43 REV 1								
CAE 24203 SM			CAE 24208 SM			CHU 24214		
SWITCH-TOGGLE: 3 POSITION, 1 CIRCUIT. DOWN IS CLOSED; CENTER POSITION IS OFF; UP POSITION IS CLOSED. CONTACTS RATED 30 AMP AT 24 V AC 5 AMP AT 125 V AC. LUMINOUS TIP ON HANDLE.			SWITCH-TOGGLE: 3 PST; CONTACTS RATED 10 AMP AT 250 V AC.			1 TO 3 OUNCES; OVERTRAVEL 1/16 INCH.		
4/3/43 CAE:8200 CG:K43J290 MAY 43 REV 1			4/7/43 CAE:8342 CAE:K43J701 MAY 43 REV 0					

RESTRICTED

NAVSHIPS 900,109

3.24-12

Class 24—Switches

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
-----------------------	--------------------	-------------------------------	-----------------------	--------------------	-------------------------------	-----------------------	--------------------	-------------------------------

CCZ 24215 MK-12
SWITCH-TOGGLE:
DPST, RATED 25 AMP AT 125 V AC, 20 AMPS
AT 250 V AC. IS OFF IN DOWNWARD POSITION

5/27/43 CCZ:980-F3N CH:9A-17056-2
SEPT 43 ISSUE 2

CCZ 24215-A MK-12
SWITCH TOGGLE
SAME AS -24215 EXCEPT HAS MORE POSITIVE
ACTION.

5/10/44 980-F6N
MAR. 44

CBZ 24216 SO-1
START-STOP SWITCH:
USED FOR STARTING AND STOPPING MOTOR
ALTERNATOR. ENCLOSED IN WATERPROOF
HOUSING.

5/28/43 CRP:28-5091 CRP:L28-5091
MAR. 45 SUB 3

CGC 24217 MARK 8
SWITCH, CAM LEVER:
4 POLE SWITCH LOCKS IN LOWER POSITION,
NON-LOCK IN UPPER POSITION UPPER AND
LOWER SECTIONS EACH CONSIST OF ONE SPST
NORMALLY OPEN AND ONE SPST NORMALLY
CLOSED SET OF CONTACTS. CONTACTS RATED
10 AMPS, AC, 2 AMPS DC AT 125V. SIMILAR
6/22/43 CGC:MCL-2-4-1-3 CH:ESA-682073-2
SEPT 43 ISSUE 2

CGC 24217
TO -24124.

CFT 24218 YL
SWITCH CAM LEVER:
2 POSITION, MOMENTARY "ON" AND "OFF".
CONSISTS OF A SET OF DPST CONTACTS, OPEN
IN THE "ON" POSITION AND CLOSED IN THE
"OFF" POSITION AND A SET OF SPST CON-
TACTS, CLOSED IN THE "ON" POSITION AND
OPEN IN THE "OFF" POSITION. CONTACTS
6/22/43 CGC:MCL-2-12-31 RA-1792-1
SEPT 43 -31 MODIFIED REV C

CFT 24218
RATED 10 AMPS AC, 2 AMPS DC AT 125 VOLTS.

CFT 24219 YL
SWITCH CAM LEVER:
4 POLE, 3 POSITION, UPPER, NEUTRAL,
LOWER, UPPER & LOWER POSITIONS ARE
MOMENTARY. FOUR SETS OF CONTACTS: A
(SPST), B (SPDT), C (SPDT) AND D (SPST).
IN UPPER POSITION A AND D ARE OPEN, B
AND C ARE CLOSED. IN NEUTRAL POSITION
6/22/43 CGC:MCL-2-28-28-4 RA:1792-1
SEPT 43 MODIFIED REV C

CGC 24219
A IS OPEN, B,C,D ARE CLOSED. IN LOWER
POSITION, B IS OPEN, A,C,D ARE CLOSED.
CONTACTS DATED 10 AMPS AC, 2 AMPS DC AT
125 VOLTS.

CFT 24220 YL
SWITCH, CAM LEVER:
4 POLE, 3 POSITION, UPPER, NEUTRAL,
LOWER, UPPER AND LOWER POSITIONS ARE
MOMENTARY. FOUR SETS OF CONTACTS: A,B,C,
AND D. ALL SPST. IN UPPER POSITION B IS
CLOSED, A,C,D ARE OPEN. IN NEUTRAL POSI-
TION, A IS OPEN, B,C,D ARE CLOSED. IN
6/22/43 CGC:MCL-2-4-4-4 RA-1792-1
SEPT 43 MODIFIED REV C

CFT 24220
LOWER POSITION, B IS OPEN, A,C,D ARE
CLOSED. CONTACTS RATED 10 AMPS AC 2 AMPS
DC AT 125 VOLTS.

CFT 24221 YL
SWITCH, CAM LEVER:
2 POSITION, MOMENTARY "ON" AND "OFF".
CONSISTS OF A SINGLE SET OF SPST CON-
TACTS WHICH ARE OPEN ON THE "ON" POSI-
TION AND CLOSED ON "OFF" POSITION.
CONTACTS RATED 10 AMPS AC, 2 AMPS DC AT
125 VOLTS.
6/22/43 CGC:MCL-30-4- CFT:RA-1803-2C
SEPT 43 31-3 MODIFIED

CSZ 24222 QCQ-2
START-STOP SWITCH:
RATED 600 VOLTS AC OR DC.

7/1/43 CLASS 9001 CRV:W-306553-14
SEPT 43 TYPE 820A SUB 0

CSZ- 24222-A QGBa, QCQ-2
PUSH BUTTON SWITCH
RATED 600 VOLTS AC OR DC. SAME AS -24222
EXCEPT IT HAS A WATER TIGHT ENCLOSURE
AND CARRIES THE MARKINGS "MCC" AND
"NORMAL".

2/26/45 CLASS-9001 CRV:W-307933-75
MAR. 45 TYPE-EQ-1108 REV 2

CYP 24223 GEN USE RE 24F147
ANTENNA SWITCH:
RATED 2500 V AT 100 AMPS. SPDT. CONSISTS
OF AN ARM WHICH IS LOCKED INTO THE CIR-
CUIT BY SPRING DETENTS, 2 TYPE -61174-B
INSULATORS AND A BASE PLATE.

7/7/43 CYP:8-450 CYP:8-450
SEPT 43

CG-24224 SK-2
PUSH BUTTON STATION:
START-STOP TYPE WITH LOCKING BAR. ONE
NORMALLY OPEN CIRCUIT AND ONE NORMALLY
CLOSED CIRCUIT. CONTACTS RATED 600 V DC,
0.4 AMPS; 230 V DC, 1 AMP; 115 V DC, 2
AMPS; 110/220 VAC, 8 AMPS; 440/550 VAC,
4 AMPS.
7/26/43 CR-2940-2KP7 CG:M-7470311
SEPT 43 REV 0

CAAK-24225 *AN/ARR-2
TIME SWITCH
SPRING WOUND MECHANISM ENCLOSED IN PLAS-
TIC CASE. MAX. TIME SETTING IS 30
MINUTES. MIN. IS 5 MINUTES. HAS 2 PAIRS
OF SPST CONTACTS, EACH PAIR RATED 125V
DC, 2 AMPS. CONTACTS ARE OPEN IN "OFF"
POSITION AND CLOSED FROM 5 MINUTE TO 30
8/3/43 EXP 490 CM:BL-31631
NOV. 43 ISSUE 2

CAAK-24225
MINUTE POSITIONS AND UNTIL RETURNED TO
"OFF" POSITION.

CHH- 24226 MK-12
TOGGLE SWITCH
DPST. CONTACTS RATED: 3 AMPS, 250 VOLTS;
6 AMPS, 125 VOLTS. BUSHING 13/64" LONG.
BALL TYPE HANDLE. TERMINALS EMERGE FROM
BOTTOM.

8/6/43 81024-FJ CM:ESA-676800-9
DEC. 44 81024-FP ISSUE 40

CHH- 24227 MK-12
TOGGLE SWITCH
DPST. CONTACTS RATED 3 AMPS, 250 VOLTS;
6 AMPS, 125 VOLTS. BUSHING 13/32" LONG.
BALL TYPE HANDLE. TERMINALS EMERGE FROM
ENDS.

8/6/43 81027-L CM:ESA-676800-17
DEC. 44 81027-LA ISSUE 40

CHH-24228 MK-12
TOGGLE SWITCH
DPST. CONTACTS RATED 3 AMPS, 250 VOLTS;
6 AMPS, 125 VOLTS. BUSHING 13/32" LONG.
BALL TYPE HANDLE. TERMINALS EMERGE FROM
ENDS. SELF RESTORING TO INDEX SLOT SIDE.

8/6/43 81057-B CM:ESA-676800-18
DEC. 44 81057-BA ISSUE 40

CHH 24228-A SL
TOGGLE SWITCH
SAME AS TYPE -24228 EXCEPT HAS HEAVIER
RESTORING SPRING.

8/30/43 81057-E CM:ESA-676800-33
DEC. 44 81057-EA ISSUE 41

CHH- 24229 MK-12
TOGGLE SWITCH
SPDT. CONTACTS RATED 3 AMPS, 250 VOLTS;
6 AMPS, 125 VOLTS. BUSHING 13/32" LONG.
BAT TYPE HANDLE. TERMINALS EMERGE FROM
BOTTOM. HAS INDEX SLOT.

8/6/43 81021-FE CM:ESA-676800-20
DEC. 44 81021-FH ISSUE 40

CHH- 24230 MK-12
PUSH BUTTON SWITCH
SPST. MOMENTARY CONTACT. CONTACTS RATED
3 AMPS, 250 VOLTS; 6 AMPS, 125 VOLTS
BUSHING 3/8" LONG. TERMINALS EMERGE FROM
BOTTOM.

8/6/43 81075-D CM:ESA-676800-35
DEC. 44 81075-DA ISSUE 40

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------

Class 24—Switches

3.24-13

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CHH-24231	MK-12		CGT-24238	SP-1M		CS-24246	A1A	
TOGGLE SWITCH DPDT. CONTACTS RATED 3 AMPS, 250 VOLTS; -6 AMPS 125 VOLTS. BUSHING 13/64" LONG. BALL TYPE HANDLE. TERMINALS EMERGE FROM BOTTOM.			SWITCH 3PDT. CONTACTS RATED 100 AMPS, 230 VOLTS AC. NOT FUSED. OPEN IN NEUTRAL POSITION. LEVER TYPE.			SWITCH BOX CONSISTS OF A SPST SWITCH RATED 20 AMPS, 24 VOLTS ENCLOSED IN A BOX WITH AN-3102-123-3P RECEPTACLE.		
8/6/43	81027-AC	CW:ESA-676800-36	8/25/43	#35323	CG:M-7472285	9/21/43		CS:R5-808768
DEC. 44	81027-FQ	ISSUE 40	AUG. 44		REV 1	NOV. 43		REV 0
CW-24232	ØSEE BELOW		CGT-24239	SP-1M		CG-24247	X-TDP-1	
SWITCHING UNIT FOR OPERATION FROM 32V DC. INCLUDES 3 POLE, 3 POSITION SWITCH AND SILICON CAR- BIDE VARISTOR. SAME AS -24233 EXCEPT SUPPLY VOLTAGE.			SWITCH 4PDT. CONTACTS RATED 100 AMPS, 230 VOLTS AC. NOT FUSED OPEN IN NEUTRAL POSITION. LEVER TYPE.			TRANSMISSION LINE SWITCHING UNIT: FOR SELECTING ONE OF TWO TRANSMITTERS TO CONNECT TO ONE OF TWO COAXIAL LINES.		
ØFOR USE WITH SE			8/25/43	#35423	CG:M-7472286	9/28/43	4MY65A1	P-7766570
8/7/43	D-151804	CW:BA-14031	AUG. 44		REV 1	FEB. 45		REV 0
NOV. 43		ISSUE 1						
CW-24233	ØSEE BELOW		CG-24240	SQ		CUN-24248	SQ	
SWITCHING UNIT FOR OPERATION FROM 115 VOLTS DC. IN- CLUDES 3 POLE, 3 POSITION SWITCH & SILICON CARBIDE VARISTOR. SAME AS -24232 EXCEPT FOR SUPPLY VOLTAGE.			SWITCH 4 CIRCUIT, 3 POSITION SWITCH. CONTACTS WILL WITHSTAND 10 AMPS AT 230 VOLTS AC.			SWITCH SPST NORMALLY OPEN. CONTACTS RATED 8 AMPS, 125 VOLTS DC INDUCTIVE AT SEA LEVEL AND 5 AMPS, 125 VOLTS DC INDUCTIVE AT 40,000 FEET. SWITCH OPERATING PRES- SURE 16-28 OZ. DIFFERENTIAL PRESSURE *CG:K-4J843, REV 0. CBM:746-410 ALL 0.		
ØFOR USE WITH SE			8/25/43	CR1070-F104-D1	CG:M-52J475	9/29/43	DXC	*SEE ABOVE
8/7/43	D-151805	CW:BA-14031	NOV. 43		REV 3	FEB. 45		
NOV. 43		ISSUE 1						
CG-24234	MARK 26		CABS-24241	SO-1	C-2517			CUN-24248
PUSH BUTTON SWITCH SPDT. NORMALLY ON MOMENTARY ON (2 LIVE, 2 CIRCUIT). CONTACTS RATED 24V AC OR DC, 10 AMPS, EXCEPT ON INDUCTIVE LOADS.			START-STOP SWITCH ELECTRICALLY SAME AS CBZ-24216 BUT HAS DIFFERENT MOUNTING PROVISIONS. PUSH BUTTON TYPE. START BUTTON IS NORMALLY OPEN, DOUBLE BEAK. STOP BUTTON IS NORMALLY CLOSED, DOUBLE BEAK. CONTACTS RATED 10 AMPS AT 115 VOLTS DC.			8-14 OZ.		
8/14/43	MCM1924A2	CG:K-7894717	8/31/43	204	CRP:U28-5100			
NOV. 43		REV 0	NOV. 43		SUB B			
CHH-24235	MARK 22		CHH-24242	MK-12		CHH-24249	SM	
TOGGLE SWITCH DPDT. CONTACTS RATED 3 AMPS AT 250 VOLTS, 6 AMPS AT 125 VOLTS. BUSHING 13/32" LONG. BAT TYPE HANDLE 3/4" LONG. TERMINALS EMERGE FROM BOTTOM.			SWITCH TOGGLE SPST CONTACTS RATED: 3 AMPS, 250 VOLTS; 6 AMPS, 125 VOLTS. BUSHING 3/8" LONG. BAT TYPE HANDLE. TERMINALS EMERGE FROM END.			SWITCH, TOGGLE DPST. CONTACTS RATED 12 AMPS AT 125 VOLTS AC.		
*ISSUE 40, CW:ESA-676800-14, ISSUE 53			9/1/43	86394-AB-	CW:ESA-676800-6-	10/21/43	80600-AU	CG:K-43J250-3
8/17/43	81027FA	CW:ESA-676800-10	DEC. 44	AC-AH	11, ISSUE 52	NOV. 43		REV 4
DEC. 44	81027FN	* SEE ABOVE						
CHH-24235-A	MARK 22		CHH-24243	MK-12		CHH-24250	MK 1, MOD 2	
TOGGLE SWITCH DPDT. CONTACTS RATED 3 AMPS AT 250 VOLTS, 6 AMPS AT 125 VOLTS. BUSHING 13/32" LONG. BAT TYPE HANDLE 3/4" LONG. TERMINALS EMERGE FROM BOTTOM. SAME AS -24235 EX- CEPT HAS INDEX SLOT.			SWITCH-TOGGLE DPDT. CONTACTS RATED 10 AMPS, 125 VOLTS; 5 AMPS, 250 VOLTS. BUSHING 3/8" LONG. BALL TYPE HANDLE. SCREW TERMINALS IN BOTTOM. CENTER POSITION IS "OFF". *CBM:T-746-115 REV 0. CAT:8-D-1678 CHANGE 1			SWITCH, TOGGLE SPST. CONTACTS RATED 1 AMP, 250V, 2 AMP, 125V. TEMP. RANGE-35°C TO 65°C.		
1/1/44	81027-AJ	CW:ESA-676800-60	9/1/43	80638	CW:ESA-682035-2	10/30/43	#20902-GB	CG:K-43J704-1
MAR. 44		ISSUE 46	MAR. 45		ISSUE 3 *	NOV. 43		REV. 0
CHH-24236	MARK 22		CMA-24244	MK-12		CHH-24251	MK 11 MOD 1	
TOGGLE SWITCH SPDT. CONTACTS RATED 3 AMPS AT 250 VOLTS 6 AMPS AT 125 VOLTS. BUSHING 13/32" LONG. BAT TYPE HANDLE 3/4" LONG. TERMINALS EMERGE FROM BOTTOM.			SWITCH ROTARY TYPE. SINGLE CIRCUIT, 5 CONTACT. SHORTING TYPE. ROUND SHAFT 1 1/8" LONG, BUSHING 3/8" LONG.			SWITCH, TOGGLE DPST CONTACTS RATED 12.0 AMPS AT 125 VOLTS, 6.0 AMPS AT 250 VOLTS. SCREW TYPE TERMINALS, BAT TYPE HANDLES.		
8/17/43	81021FB	CW:ESA-676800-23	9/4/43	3115J	CW:BA-10162-1	11/4/43	80600-2B	CG:K-7890850
DEC. 44	81021FG	ISSUE 40	NOV. 43		ISSUE 1	NOV. 43		REV 0
CNU-24237	MK-12		CIP-24245	*SEE BELOW		CMU-24252	MK-13	
SWITCH, SENSITIVE SPDT. CONTACTS RATED 10 AMPS AT 125V AC. 1/16" OVERTRAVEL DIFFERENTIAL MOVEMENT 0.01" TO 0.03". OPERATING PRESSURE IS 3 TO 5 OUNCES. PRESSURE DIFFERENTIAL 0.5 TO 1.5 OUNCES. *CRP:U28-5067, REV 4			SWITCHING UNIT FOR SWITCHING FROM RECORDER TO INDICATOR.			SWITCH SPST NORMALLY CLOSED. OVERTRAVEL: 1/16". MOVEMENT DIFFERENTIAL: 0.005" TO 0.015". PRESSURE DIFFERENTIAL: 1/4 TO 1 OZ. OPERATING PRESSURE: 1 TO 2 OZ.		
8/23/43	CMU:8-RL2	CW:BA-10052-33	*ACCESSORY FOR NJ-8 (NXS-28260)			11/5/43	WZ-RL	CW:BA-10052-22
MAR. 45	CUM:5M2BW-21	ISSUE 4 *	9/16/43	ES-1121	CIP:ES-1121	NOV. 43		ISSUE 3
			NOV. 43					

RESTRICTED

NAVSHIPS 900,109

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CMU-24252-A QCC			CG-24258			CAE 24265	NXsr-44573	17 C 10(INT) 17 C 17(INT)
SWITCH, SENSITIVE			CIRCUIT BREAKER, LINE FILTER.			PUSH BUTTON STATION		2 UNIT WATERTIGHT STATION, MANUALLY OPERATED FOR REMOTE CONTROL 50°C AMBIENT, CLASS A INSULATION.
SPST NORMALLY CLOSED, 1/16" OVERTRAVEL; 0.005 TO 0.015" MOVEMENT DIFFERENTIAL; 1/4 TO 1 OZ. PRESSURE DIFFERENTIAL; 1 TO 2 OZ. OPERATING PRESSURE. CONTACTS RATED 10 AMPS 125 AC, 5 AMPS 250V AC. SAME AS -24252 EXCEPT FOR LONGER						2/5/44	CAE:6981 ED5	CAE:886-492 CAE:6981
5/16/45 WZ-RL11		CBM:746-284				FEB. 44		
JUN. 45		ALT. 0						
			CHH-24259 QC SERIES			CRY 24266 QCB		
			SWITCH ROTARY			LEVER SWITCH		
			5 PDT CONTACTS RATED 5 AMPS 250V, 10 AMPS 125V.			DPDT UPPER POSITION LOCKING, MIDDLE POSITION OFF, LOWER POSITION RESTORING. CONTACTS RATED 3 AMP 150 WATT.		
						2/7/44	G	W-303084 SUB 9
			1/14/44 CHH:		81422	2/7/44	G	W-303084 SUB 9
			FEB. 44		SUB A	FEB. 44		
			CHH 24260 VG-VG-1			CMU 24267 WE-1		
			SWITCH, ROTARY			SWITCH		
			SIX POSITIONS, FIRST POSITION OFF. CONSISTS OF 22 SECTIONS. CONTACTS ON EVEN SECTIONS CONNECTED BY SHORTING STRIP. ROTORS OF ODD SECTION CONNECTED TO ROTOR OF NEXT CONSECUTIVE EVEN SECTION. RATING 5 AMPS 125 VOLTS DC; 10 AMPS 125 VOLTS DC			SPST-NO CONTACTS RATED 10 AMPS 125 VOLTS AC. HAS ROLLER LEAF ACTUATOR. OPERATING PRESSURE 12-14 OZ. DIFFERENTIAL PRESSURE 3-4 OZ. DIFFERENTIAL MOVEMENT LESS THAN 0.001". 1/16" OVERTRAVEL. PRESSURES AND MOVEMENT APPLY TO SWITCH WITHOUT ACTUATOR		
			1/19/44 JR		CG:M48J659	3/10/44	G-RS WITH	CG:K-52J760
			FEB. 44		REV 0	SEPT. 44	JR-2 ACTUATOR	REV 1
			CFT 24261 DAK-2			CAE 24268	NXsr-44536	
			LEVER SWITCH			DISCONNECT SWITCH		
			CONSISTS OF 2 SETS OF SPST-NO SECTIONS MOUNTED SIDE BY SIDE IN TOP SECTION OF SWITCH; AND ONE SET OF SPST-NO AND ONE SET OF SPDT SECTIONS IN LOWER SECTION OF SWITCH. 3 POSITIONS-(1) NEUTRAL: ALL SPST SECTIONS OPEN, SPDT CLOSED ON UPPER			2/24/44	6998ED2	998-1-5ME ALT 1
			1/22/44 705		RF-2145-2	FEB. 45		
			FEB. 44		ISSUE A			
			CGM 24255 SP			CG-24269	MK-26	
			SWITCH, LEVER TYPE			PUSH BUTTON STATION		
			FOUR POLE, DOUBLE THROW, THREE POSITIONS, GANGED KEY. CONTACTS RATED 20 AMPS AT 110 VOLTS AC, NON-LOCKING IN UPPER AND LOWER POSITIONS.			ONE CONTACT NO. ONE CONTACT NORMALLY CLOSED. RATED 3/1.5/0.75/0.6/1.6/0.4/0.2 AMPS, 110VAC/220VAC/440VAC/550VAC/115VDC /230VDC/550VDC. HORIZONTAL POSITION.		
			12/13/43 #8201		CG:K52J387	2/29/44	CR-2940	H-7464458P3 REV 5
			AUG. 44		REV 2	MAR. 44		
			LSZ 24262 -2339C			CYP 24270	GEN USE	
			PUSH BUTTON STATION			ANTENNA DISCONNECT SWITCH		
			START STOP TYPE. "STOP" NORMALLY CLOSED. START NORMALLY OPEN. CONTACTS RATED 6 AMPS AT 60V AC, 5 AMPS 250V DC. SILVER CONTACTS.			TRUNK TYPE SWITCH. RATED 200A, 15KV, 40KV PEAK AT 26MC. S.P.T.T. (3 POSITION; OPEN, CLOSED AND GROUNDED). CONSISTS OF TWO SWITCH BLADES WITH SILVER BALL INSERTS OPERATED BY A LEVER ARM, PROTRUDING THROUGH BOTTOM OF TRUNK SECTION. HAS		
			2/1/44		1446-C11-G1	3/1/44	CYP:S-125	S-125 REV 2
			FEB. 44		CBM:746-63	MAR. 44		
					ALT 0			
			CG-24257 GEN RADAR USE			CYP24270		
			SELECTOR SWITCH			SHIELDING GATE. HAS INTERLOCK WHICH ALLOW GATE TO BE CLOSED ONLY WHEN SWITCH IS IN GROUNDING POSITION.		
			USED TO SWITCH PROJECTION PPI TO ANY OF 5 RADAR SYSTEMS. HAS 5 ACTIVE POSITIONS, 1 OFF POSITION AND 16 WAFERS. CONNECTIONS TO BE SWITCHED ARE 1-SPEED ANTENNA TRAIN SIGNAL, 1-SPEED GYRO SIGNAL, SYNCHRONIZING PULSE AND VIDEO SIGNAL.					
			12/23/43 DL4W435A		M-193741			
			MAR. 44		SUB 0			
			CG-24258 UE-1			CMU 24271	WEB	
			ANTENNA SWITCHING GEAR			SWITCH		
			CONTAINS: (1) TIMER-TO-TRANSMITTER SWITCHES AND FEED-THROUGHS; (2) LOCAL SIGNAL ANTENNA INPUT AND ATTENUATOR NETWORK; (3) REMOTE SIGNAL INPUT AND FIRST STAGE OF ANTENNA ATTENUATOR; (4) POWER INPUT TO ALL UNITS AT 115/1/60, 50 AMPS.			SPST NORMALLY OPEN. CONTACTS RATED 8 AMPS 125 VOLTS DC INDUCTIVE AT SEA LEVEL AND 5 AMPS, 125 VOLTS DC INDUCTIVE AT 40,000 FT., 4 AMPS, 250 VOLTS D.C. NOMINAL. SAME AS CMU-24248 EXCEPT HAS ROLLER LEAF ACTUATOR. OPERATING PRESSURE		
			1/8/44 DL 4W410A			3/4/44	DXG WITH	CBM:746-488
			FEB. 44			FEB. 45	TYPE W ACTUATOR	ALT 0
			CAE 24264			CAE:6998		
			NXsr-44573			CAE:998-1-TM1		
			DISCONNECT SWITCH			ALT 2		
			RATED 250 VOLTS, 30 AMPS DC. KNIFE, 2 POLE, FUSED SINGLE THROW (ON-OFF) MANUALLY OPERATED, CONTINUOUS DUTY, 50°C AMBIENT, CLASS A INSULATION WITH DRIP PROOF ENCLOSURE.					
			2/5/44		6998ED1			
			AUG. 44					

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CAY- 24292	MXSR-44537		CAY- 24299	MXSR-44537		CAE- 24306	UE-1	
<p>PUSH BUTTON STATION: START-STOP SWITCH.</p>			<p>PUSH BUTTON STATION: START-STOP, DRIPPROOF, CLASS A INSULATION, 50°C AMBIENT RATED 250 VOLTS, 10 AMPS AC OR DC CONTINUOUS, 250V DC 6 AMPS AND 250V AC 30 AMPS BREAK.</p>			<p>SWITCH TOGGLE: DPDT-CONTACTS RATED: 20 AMPS-125 VOLTS AC, 30 AMPS-24 VOLTS DC. CONSISTS OF AN-3023-1 PLUS A RUBBER BOOT OVER TOGGLE.</p>		
1/8/44	1-246-4B1		*REV 3, CAY:45-J-463, SUB 3			5/11/44	8700-K4	CG:K-52J277
1AY 44			4/15/44	TYPE HDN	2-D-3059	AUG. 44		REV 2
			DEC.444	STYLE 124652634	*SEE ABOVE			
CGC- 24293	MX 13		CTC- 24300	MX-13		CHH- 24307	UE-1	
<p>LEVER SWITCH: 3 POSITIONS ALL LOCKING, CONSISTS OF 4 SPST N.O. SECTIONS, 10 AMPERES, 125 VOLTS AC, NON-INDUCTIVE LOAD, 2 AMPERES, 125 VOLTS DC, NON-INDUCTIVE LOAD.</p>			<p>ROTARY SWITCH: SPDT, CONTACTS RATED 3 AMPS AT 125 VOLTS DC, 1 1/2" LONG FLATTED SHAFT, REPLACEMENT SWITCH TO HAVE 2" SHAFT.</p>			<p>SWITCH TOGGLE: DPST-CONTACTS RATED: 1 AMP-250 VOLTS, 3 AMPS-125 VOLTS AC.</p>		
4/10/44	HCL-1-1-1-1	(CM)ESA-682073-4	5/5/44	SVR	CM:BA-10209	5/11/44	20902-RK	CG:K-54J599
AUG. 44		ISS 4	AUG. 44		ISSUE 1	AUG. 44		REV 2
CGC- 24294	MX-13		CRN- 24301	TDB-2		CHH- 24308	UE-1	
<p>LEVER SWITCH: 2 POSITIONS LOCKING, NO THROW IN UP POSITION, CONSISTS OF 2 DPDT SECTIONS IN LOWER HALF OF SWITCH, 10 AMPERES, 125 VOLTS AC, NON-INDUCTIVE LOAD, 2 AMPERES, 125 VOLTS DC, NON-INDUCTIVE LOAD.</p>			<p>ANTENNA TRANSFER SWITCH: USED TO TRANSFER, MODEL TDB SERIES TRANSMITTER ANTENNA CONNECTION TO OTHER TRANSMITTERS USING THE SAME ANTENNA. SWITCH HAS TWO KNIFE BLADES, EACH WITH FOUR POSITIONS, ONE POSITION OF EACH BLADE EQUIPPED WITH AUXILIARY CONTACTS FOR</p>			<p>SWITCH TOGGLE: DPST- CONTACTS RATED: 3 AMPS-250 VOLTS, 6 AMPS-125 VOLTS AC.</p>		
4/10/44	HCL-31-31-19-19	(CM)ESA-682073-5	5/9/44	CRH:ATS-7	CRM:K-144	5/12/44	81024	CG:K-57J29
AUG. 44		ISS 4	AUG. 44		SUB 1	FEB. 45		REV 0 *
CGC- 24295	MX 13		CRM- 24301			CHH- 24309	UE-1	
<p>LEVER SWITCH: 3 POSITIONS, LOCKING IN CENTER POSITION ONLY, CONSISTS OF ONE SPST N.O. SECTION IN UPPER PART AND ONE SPST SECTION IN LOWER PART OF SWITCH, 10 AMPERES, 125 VOLTS AC NON-INDUCTIVE LOAD, 2 AMPERES, 125 VOLTS DC NON-INDUCTIVE LOAD.</p>			<p>DIRECTION FINDER INTERLOCK PURPOSES.</p>			<p>SWITCH, PUSH BUTTON: TWO CIRCUIT- CONSISTS OF 1 SPST-NO AND 1 SPST-NC, SLOW MAKE AND SLOW BREAK MOMENTARY CONTACT, CONTACTS RATED 1 AMP AT 250 VOLTS AC, 3 AMPS AT 125 VOLTS AC.</p>		
4/10/44	HCL-2-30-2-30	(CM)ESA-682073-6				5/12/44	3392S	CG:K-54J777
AUG. 44		ISS 4				AUG. 44		REV 2
CGC- 24296	MX 13		CG- 24302	SC-4		CHH- 24310	UE-1	
<p>LEVER SWITCH: 3 POSITIONS, ALL LOCKING, UPPER AND LOWER SECTIONS EACH CONSIST OF ONE MAKE BEFORE BREAK SET OF CONTACTS, 10 AMPERES, 125 VOLTS AC, NON-INDUCTIVE LOAD, 2 AMPERES, 125 VOLTS DC NON-INDUCTIVE LOAD.</p>			<p>PUSH BUTTON STATION: ONE NORMALLY OPEN AND ONE NORMALLY CLOSED CONTACT START - STOP, SAME AS -24312 HAS EXTRA CONTACT ON START SIDE.</p>			<p>SWITCH TOGGLE: SPST CONTACTS RATED 6 AMP AT 250 V, 12 AMPS AT 125V AC.</p>		
4/10/44	HCL-7-29-7-29	(CM)ESA-682073-7	5/10/44	CR:5844E200K	M-7472580-2	5/18/44	80607-NC	*SEE ABOVE
HAY 44		ISS 4	AUG. 44		REV 2	DEC. 44		
CHM- 24297	QGA		CHN- 24303	UE-1		CHH- 24311	UE-1	
<p>SWITCH: SPST NORMALLY OPEN CONTACTS RATED 16 AMPS, 125V, 60- 1/4" OVER TRAVEL, 0.0035" CONTACT SPACING PRE-TRAVEL - 0.006 TO 0.020 DIFFERENTIAL PRESSURE 20 TO 70%.</p>			<p>SWITCH TOGGLE: DPST - CONTACTS RATED AT 12 AMPS - 125 VOLTS AC, BAT TYPE HANDLE BUSHING-LENGTH 5/16".</p>			<p>SWITCH TOGGLE: DPST, CONTACTS RATED 12 AMP AT 125 VOLTS AC.</p>		
			5/11/44	80600-AZ	CG:K-43J250-4	5/18/44	80600-BP	CG:K-43J855
			AUG. 44		REV 8	AUG. 44		REV 4
CAQJ	YF		CHH- 24304	UE-1		CG- 24312	SC-4	
<p>CRP- 24298 SELECTOR SWITCH: CONSISTS OF AN ARROW, HART & HEGEMAN TYPE 2400 24 POLE, 6 THROW (5 ON, 1 OFF) RATED 5 AMPS, 124 VOLTS DC AND 10 AMPS 125V AC AND 5 DPDT TOGGLE SWITCHES MANUFACTURED BY ARROW-HART & HEGEMAN, NO. 4/14/44 RX-1177 M-59A1-V3 SUB A</p>			<p>SWITCH TOGGLE: DPST CONTACTS RATED: 1 AMP-250 VOLTS, 3 AMPS-125 VOLTS AC.</p>			<p>PUSH BUTTON STATION: ONE NORMALLY OPEN AND ONE NORMALLY CLOSED CONTACT START-STOP, SAME AS -24302 EXCEPT -24302 EXTRA CONTACT ON START SIDE.</p>		
			5/11/44	20902-HF	CG:K43J704-4	*REV 2, CRV:M-307401-11 SUB 1		
			AUG. 44		REV 6	5/20/44	CR:5844E2008	M-7472580-1
						AUG. 44		*SEE ABOVE
			CHH- 24305	UE-1		CHS- 24313	UX	
<p>810236S; CONTACTS RATED AT 6 AMPS 115V, CLOSURE IS OF DRIPPROOF CONSTRUCTION.</p>			<p>SWITCH TOGGLE: SPST-CONTACTS RATED: 1 AMP-250 VOLTS, 3 AMPS-125 VOLTS AC.</p>			<p>EXCITATION SWITCHING UNIT: CONTAINED IN CABINET HAVING OUTSIDE DIMENSIONS OF 6" X 8 1/16" X 4". FOUR ROTARY TYPE SELECTOR SWITCHES, EACH HAVING 4 POSITIONS, ARE PROVIDED FOR SELECTING & SWITCHING ANY ONE OF 4 INPUT CIRCUITS TO EACH OF 4 OUT PUT CIR-</p>		
			5/11/44	20994-MR	CG:K-44J797-4	5/27/44	B-C-3A	DD-3295-C-1
			AUG. 44		REV 6	DEC. 44		

Class 24—Switches

3.24-17

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
		CHS 24313	CAE-24321	DAS-3		CAE-24329	NXSS-29848	
		CUITS. SWITCHES ARE OF LOW CAPACITY TYPE. INPUT & OUTPUT TERMINATION FACILITIES PROVIDED FOR TYPE RG-8/U COAXIAL CABLES OR THE EQUIVALENT. OUTPUT OF TIMER TO TRANSMITTER.		SWITCH, TOGGLE: SPST. RATED 3 AMP. AT 250VOLTS, 1" BUSHING.			SWITCH, TOGGLE: SPST, ONE BREAK PER CIRCUIT. CONTACTS RATED 6 AMP. AT 250 VOLTS. SNAP ACTION. BUSHING 11/32 INCH LONG.	
		CLU-24314	7/3/44	8381	CFE-45.164	7/10/44	CAE-7321K2	CG:K-8273225
		GEN. RADIO USE	SEPT. 44		ISSUE A	SEPT. 44		REV 1
		ANTENNA SWITCHING UNIT: 8 WAY ROTARY SWITCH FOR SWITCHING ANTENNAS. HAS 8 COAXIAL RECEPTACLES FOR ANTENNA LINES AND ONE POWER INPUT RECEPTACLES (CONCENTRIC). INCLUDES A MICRO-SWITCH.		CHH-24322	DAS-3		CAE-24330	NXSS-29848
		6/15/44						
		CLU:RXD431						
		ISSUE 2						
		CSZ-24315	7/3/44	20902	CFE-45.229A	7/10/44	* SEE ABOVE	CG:K-8691822
		GEN. USE NXSR-56784	SEPT. 44		ISSUE B	SEPT. 44		REV 1
		KNIFE SWITCH: 2 PST. RATED 30 AMPS AT 250 VOLTS DC. DRIPPROOF, HI-SHOCK, CLASS A INSULATION. FUSIBLE.		CAE-24323	NXSR-51539		CAE-24331	ST
		(CSZ)DWG-NO NUMBER)						
		6/22/44						
		NA-6251						
		17S18 (INT)						
		SEPT. 44						
		CM-24316	7/4/44	6998	*SEE ABOVE	7/11/44	*CAE-7525 MODIFIED	CM:8-14896-1
		GEN. RADAR USE	MAR. 45	4109H3A		SEPT. 44		ISS 8 (6)
		RADAR ORDER SWITCH: 5 POSITION. MANUALLY OPERATED. EACH POSITION HAS ONE LIGHT TO CORRESPOND WITH A GIVEN RADAR SYSTEM. FOR USE WITH THE CM-23AFL RADAR DISTRIBUTION SWITCH-BOARD. SUPPLY: 115/1/60 FOR PILOT LAMPS.						
		6/23/44						
		CAL-20040						
		SEPT. 44						
		CBH-24317	7/7/44	6998	998-1-6M1	7/12/44	CSD-24332	ST
		MK 51	FEB. 45	4109H9	ALT 0	SEPT. 44		
		SWITCH, TOGGLE: SPST. NORMALLY OPEN. MOMENTARY CONTACT. 13/32" BUSHING. CONTACTS RATED 3 AMPS. AT 250V. 6 AMPS AT 125V. SAME AS -24318 EXCEPT IS NORMALLY OPEN.						
		6/25/44						
		CHH:86709-8D						
		SEPT. 44						
		CM:ESA-676800-6						
		ISSUE 51						
		CHH-24318	7/7/44	8365	CRB:SW-1000-2	7/14/44	CHH-20905-MP	CG:K-44J420-5
		MK 51	SEPT. 44		ISSUE C *	SEPT. 44		REV 6
		SWITCH, TOGGLE: SPST. NORMALLY CLOSED. MOMENTARY CONTACT. 13/32" BUSHING. CONTACTS RATED 3 AMPS. AT 250V. 6 AMPS AT 125V. SAME AS-24317 EXCEPT IS NORMALLY CLOSED.						
		6/29/44						
		CHH:86709-BE						
		SEPT. 44						
		CM:ESA-676800-70						
		ISSUE 51						
		CHH-24319	7/7/44	8365	CRB:SW-1000-1	7/17/44	CG-24334	MK 21
		MK 51	SEPT. 44		ISSUE C	SEPT. 44		
		SWITCH, TOGGLE: SPST. RATED 3 AMPS. AT 250V. 6 AMPS AT 125V. 7/32" BUSHING.						
		6/29/44						
		CHH:86995-GE						
		SEPT. 44						
		CM:ESA-676800-72						
		ISSUE 51						
		CHH-24320	7/7/44	8365	CRB:SW-1000-1	7/17/44	CG-24335	MK 33
		MK-33	SEPT. 44		ISSUE C	SEPT. 44		
		SWITCH TOGGLE SPDT: 13/64" BUSHING. CONTACTS RATED 3 AMPS. AT 250V. 6 AMPS. AT 125V.						
		6/21/44						
		CHH:81021-AR						
		NOV. 44						
		CM:ESA-676800-73						
		ISSUE 5						
		CHA-24328	7/8/44	3243J	CR8:SW-1014-16	7/17/44	1GA4C33	K-5416065
		X-LAF-1	SEPT. 44		ISSUE A	SEPT. 44		REV 0
		SWITCH, ROTARY SINGLE GANG, 4 CIRCUIT, 3 CONTACTS PER CIRCUIT, NON-SHORTING TYPE, ENCLOSED CASE. 2" LONG ROUND SHAFT, 3/8" BUSHING. 1 1/4 DIA. BASE.						
		ASSIGNED ISSUED						
DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CHU- 24336 MK 33	RE 24F 151		CG- 24343 AN/ARQ-10	RE24A157		CHH- 24351 TS-34/AP		
SENSITIVE SWITCH SPDT WITH ONE COMMON AND ONE CLOSED AND ONE NORMALLY OPEN CONTACT. ONE BREAK PER CIRCUIT. RATED 1200 WATTS, 600 VOLTS AC OR DC MAXIMUM 10 AMPS 125V SPRING PLUNG-ER TYPE. OPERATING PRESSURE 12 TO 14 OZ. *CW:SA-10052-9 ISSUE 12, CG:K-8685085 7/19/44 CHU:CAT#8-RS CG:K-9031081 FEB. 45 REV 0 *			CG- 24343 AN/ARQ-10 RE24A157 SWITCH SPDT, ONE NORMALLY OPEN, ONE NORMALLY CLOSED, DOUBLE BREAK, 0.020" AIR GAP. CONTACTS RATED 125V 0.20 AMPS; 250V. 0.10 AMPS DC. *CG:K-57J909 REV D 8/2/44 CR1070-C103C3 CFT:NCP40-3C-43 MAR. 45 REV C*			CHH- 24351 TS-34/AP SWITCH TOGGLE DPDT, CONTACTS RATED: 3 AMPS AT 250 VOLTS; 6 AMPS. AT 125 VOLTS. BUSHING 13/64" LONG. BAT TYPE HANDLE. TERMINAL EMERGE FROM BOTTOM. (AC) 8/15/44 81027-FH (CW)ESA-676800-57 OCT. 44 ISSUE 53		
CGU- 24336			CAU- 24344 AN/ARQ-10			CAE- 24352 MARK 15		
PRESSURE DIFFERENTIAL 3 TO 4 OZ. 1/16" OVERTRAVEL. MOVEMENT DIFFERENTIAL 0.001" OR UNDER.			CAU- 24344 AN/ARQ-10 SWITCH LEVER 3 POSITIONS LOCKING. CONSISTS OF ONE SPST, NO SECTION AND THREE SPST NC SECTIONS; CONTACT RATING 24V DC, 1 AMP, INDUCTIVE LOAD. 8/2/44 H-77551-3 (CFT)NLS0345-1 OCT. 44 ISS. A			CAE- 24352 MARK 15 SWITCH DISCONNECT CONTACTS RATED 250 VOLTS D.C., 30 AMPS, 440 VOLTS A.C.; 2 POLE SINGLE THROW. CONTACTS SILVER TO SILVER. FOUR FUSE CLIPS MOUNTED ON TOP OF ACCOMMODATE TWO FUSES. 8/16/44 82142W1 (CW)B0-20958-1 OCT. 44 ISS. 1		
CG- 24337 SP			CAU- 24345 AN/ARQ-10			CHH- 24353 CANU-23423		
SWITCH, PUSH BUTTON; SPDT RATED 10 AMPS AT 230 VOLTS AC. TER-MINALS AT ENDS OF SWITCH. 7/19/44 CR1070-C103-J2 CG:K-57J857 SEPT. 44 REV 0			CAU- 24345 AN/ARQ-10 SWITCH LEVER 3 POSITIONS LOCKING. SECTIONS ONE AND TWO, CONSIST OF ONE SPDT, AND ONE DPST, NC; SECTION THREE CONSISTS OF ONE DPDT AND ONE SPST, NC; SECTION FOUR CONSISTS OF ONE SPDT AND ONE SPST, NC; CONTACT RATING 24V DC, 1 AMP; INDUCTIVE LOAD. 8/3/44 H-77551-4 (CFT)NLS0346-1 OCT. 44 ISS. B			CHH- 24353 CANU-23423 SWITCH, SNAP ACTION CONTACTS RATED AT 6 AMPS., 125 VOLTS, 3 AMPS 250 VOLTS; SINGLE POLE, SINGLE THROW, NORMALLY OPEN; MOMENTARY CONTACT; SILVER PLATED CONTACTS. SALT SPRAY RESISTANT. 8/18/44 81075-N (CANU)S-660-11 OCT. 44		
CHH- 24338 UE-1			CRV- 24346 MCA CONVERSION			CHH- 24354 CANU-23423		
TOGGLE SWITCH; DPDT, CONTACT RATING 1 AMP AT 250 VOLTS, 3 AMPS AT 125V, AC. 7/20/44 CHH20905-MH CG:K-44J42 -1.4 SEPT. 44 20905-MH REV 6			CRV- 24346 MCA CONVERSION SWITCH BOX 5 POT ROTARY SWITCH MOUNTED IN A BOX. MOUNTS OVER BEARING INDICATOR UNIT AND SWITCHES THE READING ON THE BEARING INDICATOR UNIT FROM CYRO-COMPASS BEARING TO THE BEARING OF THE -51075 HYDROPHONE ASSEMBLY. 8/5/44 OCT. 44			CHH- 24354 CANU-23423 PUSHBUTTON STATION (2 UNIT) RATED AT 600V, A.C. 5 AMPS., SPST., MO-MENTARY CONTACT; SILVER PLATED CONTACTS, METAL PARTS TO WITHSTAND 200 HR. SALT SPRAY TEST. COMPOSED OF COLLECTIVELY: 1 UNIT, NORMALLY OPEN WITH RED BUTTON. 1 UNIT NORMALLY OPEN WITH RED BUTTON. 8/18/44 27909-UF (CANU)S660-8 OCT. 44		
CHH- 24339 MK 33			CGC- 24347 MK 20 MOD 1			CHH- 24355 CANU-23423		
TOGGLE SWITCH; SPDT, RATED 3 AMPS 125 VOLTS, 1 AMP 250 VOLTS AC. ONE BREAK PER CIRCUIT. BALL LEVER. TERMINALS AT ENDS. 8/14/44 21189 CG:K7889526P1 SEPT. 44 REV 0			CGC- 24347 MK 20 MOD 1 SWITCH, LEVER 3 POSITIONS, LOCKING IN CENTER AND ONE EXTREME POSITION. CONSISTS OF ONE SPST NORMALLY OPEN SECTION IN UPPER PART AND ONE SPST NORMALLY OPEN SECTION IN LOWER PART OF SWITCH, CONTACT RATINGS 10 AMPS, 125 VOLTS AC; 2 AMPS, 125 VOLTS DC. 8/8/44 MCL-2-50-1-29 (CW)ESA-682073-3 OCT. 44 ISS. 5			CHH- 24355 CANU-23423 PUSHBUTTON STATION RATED 600V AC 5 AMPS SPST MOMENTARY CONTACT; SILVER PLATED CONTACTS, METAL PARTS TO WITHSTAND 200 HR. SALT SPRAY TEST. COMPOSED OF: 1 UNIT, NORMALLY CLOSED WITH BLACK BUTTON. 8/18/44 27905-UF (CANU)S660-8 OCT. 44		
CGT- 24340 QBE-5			CSZ- 24348 NXst-53331	17S18		CHH- 24356 X-LAF-1		
LINE SWITCH 2 PST, RATED 30 AMPS, 250 VOLTS, 2 HP MAX, 230V AC, 5 HP MAX, 250V DC. HANDLE OPERATED TYPE, FUSED FOR 250V DC. SAME AS 24128 EXCEPT FUSED FOR 250 VOLTS IN-STEAD OF 115 VOLTS. 7/26/44 (CBH)446AA OCT. 44			CSZ- 24348 NXst-53331 17S18 KNIFE SWITCH 2 PST, RATED 60 AMPS AT 250V DC. DRIP-PROOF, HI-SHOCK, CLASS "A" INSULATION, FUSIBLE. 8/9/44 NA625 OCT. 44			CHH- 24356 X-LAF-1 JACK SWITCH DPST, CENTER OFF POSITION. 8/19/44 762 (CRB)SW-1012 SEPT. 44 ISSUE A		
CAY- 24341 QBE-4			CAE- 24349 NXst-53331			CHH- 24357 AN/ART-2		
MASTER SWITCH START-STOP, MOMENTARY CONTACT, 3 UNIT WATER TIGHT PHENOLIC PUSH BUTTON STATION CONTACT RATING IS 10 AMPS FOR CONTINU-OUS OPERATION UP TO 600V AC OR DC. 7/27/44 HDN 60431 OCT. 44 (CBH)996			CAE- 24349 NXst-53331 PUSH BUTTON STATION TWO-BUTTON START-STOP PUSHBUTTON STATION EACH BUTTON BEING OF NORMALLY OPEN MOMENTARY CONTACT TYPE. HOUSING IS OF PHENOLIC AND GOOD FOR HI SHOCK. 8/12/44 6981N172 OCT. 44			CHH- 24357 AN/ART-2 TOGGLE SWITCH BAT HANDLE TYPE, DOUBLE POLE, SINGLE THROW; CONTACTS RATED 3 AMPS @ 125 VOLTS AC. TERMINALS EMERGE FROM BOTTOM. 8/21/44 81024-FA (CW)ESA-676800-13 OCT. 44		
CG- 24342 AN/ARQ-10	RE24A157		CAY- 24350 NXst-53394			CSZ- 24358 AN/ART-2		
SWITCH SPST, NORMALLY OPEN, DOUBLE BREAK, 0.020" AIR GAP, CONTACTS RATED 10 AMPS AT 115V 10 AMPS AT 230V, AC, AND 0.30 AMPS AT 125V, 0.15 AMPS AT 250V DC. *CW:SA-10134-3 ISS 1, CG:K-56J735 REV 2 8/2/44 CR1070-C103B3 CFT:NCP40-3C-40 MAR. 45 REV C *			CAY- 24350 NXst-53394 PUSH BUTTON STATION 2 BUTTON, START-STOP TYPE, DRIPPROOF, CLASS "A" INSULATION, 50°C AMBIENT, RATED 30 AMPS AT 250 VOLTS DC. 8/12/44 HDN OCT. 44			CSZ- 24358 AN/ART-2 PUSHBUTTON SWITCH SINGLE POLE, CONTACTS NORMALLY CLOSED, VOLTAGE UP TO 29V DC, CURRENT RATING 15 AMPS. (INDUCTIVE), BUTTON TRAVEL 5/32 INCH. 8/21/44 CLASS 9390 OCT. 44 TYPE C		

Class 24—Switches

3.24-19

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
-----------------------	--------------------	-------------------------------	-----------------------	--------------------	-------------------------------	-----------------------	--------------------	-------------------------------

CAE-24359 MARK 33
TOGGLE SWITCH
3 PDT WITH NO "OFF" OR CENTER POSITION.
CONTACTS RATED 1 AMP 115 VOLTS, 60
CYCLES; 20 AMPS AT 24 VOLTS DC OR 1/2
HP AT 115 TO 575 VOLTS AC SINGLE PHASE
OR 3/4 HP AT 115 TO 575 VOLTS AC 2 OR 3
PHASE. TO WITHSTAND 1500 VOLTS 60 CYCLES
8/22/44 SIMILAR TO (CG)M-8650672
OCT. 44 8745K5 REV 0

CMA-24364 ASA-1
SWITCH, PUSH BUTTON
2 POLES, DOUBLE THROW. RATINGS: 50 VOLTS,
0.1 AMP.

CDM-24371 TBH-12
SWITCH, LEVER
3 POSITIONS LOCKING. CONSISTS OF A SP
MAKE SECTION IN UPPER HALF OF SWITCH
AND A SP MAKE SECTION IN LOWER HALF.
CONTACTS RATED 2 AMPS -110V OC/10 AMPS -
110V AC. BOTH NORMALLY OPEN IN MIDDLE
POSITION.
9/13/44 (COM)#4101 (CAY)P-7707082-
OCT. 44 14. SUB 26

CAE-24359
HIPOTENTIAL BETWEEN TERMINALS AND
GROUND.

8/31/44 2008
OCT. 44

CRV-24365 JT
BEARING REPEATER SWITCH
5 PDT ROTARY SWITCH MOUNTED IN A BOX.
MOUNTS OVER BEARING INDICATOR UNIT AND
SWITCHES THE READING OF THE BEARING IN-
DICATOR UNIT FROM GYROCOMPASS BEARING
TO THE BEARING OF THE -51075 HYDROPHONE
ASSEMBLY. SIMILAR TO TYPE -24346 BUT NOT
9/5/44
OCT. 44

CAE-24372 MK 20 MOD 1
SWITCH, TOGGLE
SPST, FLUSH MOUNTED, SILVER-PLATED CON-
TACTS RATED 20 AMPS., AT 24 VOLTS DC;
10 AMPS. AT 125 VOLTS AC. EQUIPPED
WITH A LEVER FOR CAM OPERATION. NORMALLY
OPEN. SIMILAR TO AN 3022-10 EXCEPT LAT-
TER IS MOMENTARILY ON.
9/28/44 8905K693 (CW)BA-10177-5
OCT. 44 ISS 4

CAY-24360 MK 20 MOD 1
SWITCH, PUSH BUTTON
SINGLE BUTTON; 2 CIRCUITS, ONE NORMALLY
ON AND MOMENTARILY OFF, OTHER NORMALLY
OFF AND MOMENTARILY ON. CONTACTS RATED
3 AMPS, 110-125V; 1.5 AMPS, 220-250V;
0.75 AMPS, 440-480V; 0.6 AMPS, 550-600V.
AC & 1.1 AMPS, 115-125V 0.55 AMPS, 230-
8/26/44 SD-2 (CW)BA-10196-3
OCT. 44 ISS. 3

INTERCHANGEABLE.

CRV-24365

CHH-24373 CANU-23423
SWITCH, TOGGLE;
SPST CONTACTS RATED 6 AMP AT 250V, 12
AMP AT 125V DC.

CAE-24360
250V; 0.2 AMPS 550-600V. DC. HAS 2 MTG.
HOLES FOR 0.164 DIA. SCREW.

CGT-24366 TBK
SWITCH, TOGGLE
DPST, DOUBLE BLADE. CONTACTS RATED 30
AMPS, 250 VOLTS. NO BUSHING.

10/5/44 80607-HD CANU:S-660-10
NOV. 44

CAE-24374 IS-120/UP
SWITCH, TOGGLE;
DPST, CONTACTS RATED 3 AMPS AT 250 VOLTS,
11/32" BUSHING. FOUR REAR LUGS.

9/8/44 7475-C CRV:K-818231-1
SEPT. 44 SUB 3

10/11/44 8360 CRB:SW-1000-3 ISS D
NOV. 44 CHZ:SW-1082 REV 0

CAY-24361 MARK 20 MOD 1
SWITCH PUSH BUTTON
TWO BUTTONS THREE WIRE SINGLE CIRCUIT.
ONE BUTTON NORMALLY OFF, MOMENTARILY ON;
OTHER BUTTON NORMALLY ON MOMENTARILY
OFF. CONTACTS RATED 3 AMPS, 110-125V 1.5
AMPS, 220-250V; 0.75 AMPS, 440-480V; 0.6
AMPS, 550-600V AC; & 1.1 AMPS, 115-125V
8/26/44 SD-2 CW:BA-10196-4
NOV. 44 ISSUE 3

CGC-24367 TBK
SWITCH, LEVER
CONSISTS OF TWO SECTIONS: SINGLE POLE
MAKE AND SINGLE POLE BREAK IN UPPER HALF
OF SWITCH MAKE BEFORE BREAK. POSITIONS 1
AND 2 LOCKING. POSITION 3 NO THROW. CON-
TACTS RATED 2.0 AMPS 110 VOLTS DC AND
10.0 AMPS 110 VOLTS AC.
9/8/44 GCL-13-15-31-31 CRV:M-421761-2
SEPT. 44 SUB 1

CAY-24375 TBK-11
KNIFE, SWITCH;
14 PDT. ALL 14 BLADES INTERCHANGEABLE,
AND CAPABLE OF OPERATING AT: 5500V AT
0.4 AMP., 2500V AT 2.3 AMPS., AND 110V
AT 25 AMPS.
CANCELLED

11/7/44 T-7607446,P-10
NOV. 44 REV. 10

CAY-24361
0.55 AMPS, 230-250V; 0.2 AMPS, 550-
600V DC. HAS CENTER MTG. HOLE FOR 0.190
DIA. SCREW.

CHU-24368 TBK RE 24F 151
SWITCH
SPST-NORMALLY CLOSED. RATED 10 AMPS,
125 VOLTS; 5 AMPS, 250 VOLTS; 3 AMPS,
460 VOLTS; 2 AMPS, 600 VOLTS AC. OPERAT-
ING PRESSURE 12 TO 14 OZ. OVER TRAVEL 1/16".
MOVEMENT DIFFERENTIAL 0.001" OR UNDER.
9/9/44 CHU:R-RS CRV:M-440261-7
SEPT. 44 SUB 4

CAY-24376 TBK-9
KNIFE SWITCH DISCONNECT;
3 PST, 440 VOLTS, 3 PHASE, 60 CYCLES.
INTERLOCKED WITH CABINET DOOR.
CANCELLED

11/7/44 24-J-931,IT. 3 24-J-931,IT 3
NOV. 44 REV. 0

CHH-24362 LORAN C-1
SWITCH PUSHBUTTON;
SPST- NORMALLY OPEN. CONTACTS RATED 12
AMPS, 125 VOLTS.

CHA-24369 TBK
SWITCH, PUSH BUTTON
SP-BREAK 2 CONTACTS, NON-LOCKING. CON-
TACTS RATED 5 AMPS, 110V AC, 60 CYCLES.

CGC-24377 MK 13 MOD 0
SWITCH, LEVER;
CONSISTS OF TWO SECTIONS. (1) OP, MAKE
BEFORE BREAK AND SPDT. (2) SPST AND SP
MAKE BEFORE BREAK AND SPDT. POSITIONS 1
AND 2 LOCKING. NO THROW IN LOWER POSI-
TION. CONTACTS RATED 10 AMPS, 125 VOLTS
AC, 2 AMPS, 125 VOLTS DC.
10/12/44 HCL-(25+7)-(25+1) CW:682073-8
NOV. 44 31-31 ISSUE 6

8/28/44 80631 CDU:DD-3248-A-1
FEB. 45

9/9/44 2005 CRV:K-855409-1
FEB. 45 SUB 7

CHA-24363 ASA-1
SWITCH, PUSHBUTTON
SINGLE BUTTON, SPDT, RATINGS: 50 VOLTS,
0.1 AMP.

CHH-24370 LORAN C-1
SWITCH PUSHBUTTON;
MOMENTARY CONTACT SPST NORMALLY OFF.

CHH-24378 AN/TPS-1B
SWITCH, TOGGLE;
SPST, CONTACTS RATED 3 AMPS AT 250V AND
6 AMPS AT 125V., AC AND DC. BALL TYPE
HANDLE.

8/30/44 2003-L
OCT. 44

9/11/44 81024
SEPT. 44

10/23/44 81015-8A CW:ESA-676800-74
NOV. 44 ISS. 53

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------

RESTRICTED

NAVSHIPS 900,109

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
-24379	AN/TPS-18	RE 24F 151	CAE-24385	AN/UMP-1,1A,1B		CHU-24393	TEB	
SWITCH, SENSITIVE; SPST, NORMALLY OPEN. CONTACTS RATED 10 AMPS AT 125V AC. ROLLER LEAF ACTUATOR. MOVEMENT DIFFERENTIAL 0.005 TO 0.015". OPERATING PRESSURE 2 TO 3 OZ. PRESSURE DIFFERENTIAL 1/2 TO 1.0 OUNCE. OVERTRAVEL 1/16".			SWITCH TOGGLE; DPST CONTACTS RATED AT CONTINUOUS CURRENT CARRYING CAPACITY 30 AMPS. MAKING: 125V AC -5 AMPS. BREAKING: 125V AC RESISTANCE LOAD 20 AMPS INDUCTIVE LOAD-30 AMPS. EMERGENCY BREAKING: 125V AC, 40 AMPS.			SWITCH MICA;		
10/23/44	CHU:YZ-RL2	CW:BA-10052-29	10/27/44	CAE:8823	CHZ:SW1066	11/22/44	YZ-RL2	CATALOG
NOV. 44		ISS. 11	DEC. 44		REV 0	DEC. 44		
CG-24380	SK-3		CHH-24386	08C		CAY-24394	TBK-16	
PUSH BUTTON STATION; CONSISTS OF THREE SPOT SETS OF CONTACTS WITH THREE BUTTONS MARKED "START" "STOP-RESET", "EMERGENCY RUN". CONTACTS RATED: 6 AMPS 115V AC 3 AMPS, 220V AC; 1.5 AMPS 440V AC, AND 2.2 AMPS 115V DC; 1.1 AMPS 230V DC. HAS WATER TIGHT MOLDED PHENOLIC			SWITCH; DPST 1 AMP AT 125V AC 125 WATTS ONE CIRCUIT NORMALLY OPEN ONE NORMALLY CLOSED. CONTACTS SILVER PLATED. SLOW MAKE AND SLOW BREAK MOMENTARY CONTACT.			SWITCH, CIRCUIT BREAKER; 3 PST, SINGLE BREAK, NORMALLY CLOSED. 600V AT 25 AMPS AC TRIPPING.		
11/13/44	CR-5844-E300A	CG:M-7475138-1	10/30/44	3392-A	CM:BA-11718-1	11/30/44	S#1222034	
NOV. 44		REV. 0	FEB. 45		ISS 4	DEC. 44		
CG-24380			CARU-24387	TEB		CAE-24395	NK 32 MOD 1	
CASE, DESIGNED FOR HIGH SHOCKS.			SWITCH, TUMBLER; SPST, 20 AMPS AT 250V AC. YOKE INSULATED FROM MECHANISM.			SWITCH, TOGGLE; 4 PDT, 3 POSITION CENTER OFF, MOMENTARY ON, SNAP ON. CONTACT RATING 10 AMP 250 VOLTS AC.		
			11/22/44	5421	CATALOG	12/2/44	B887K1	CAOS:A10077C
			DEC. 44			DEC. 44		REV 0
CAE-24381	TBM		CDB-24388	TEB		CG-24396	RAO-2.6	
TOGGLE SWITCH; SPST. CONTACTS RATED, 3 AMPS AT 250 VOLTS DC. BALL TYPE HANDLE 15/32" BUSHING. REAR LUGS. 2 BREAKS PER CIRCUIT.			SWITCH, TOGGLE BAT-HANDLED; DPDT, 3 AMPS AT 125 VOLTS OR 1 AMP AT 250V NICKEL PLATED FINISH WITH 7/16" SHANK.			SWITCH TOGGLE; SPST, CONTACTS RATED 3 AMPS 250 VOLTS DC. BALL TYPE HANDLE. 3/8" BUSHING.		
11/15/44	#8280	CAY:P-7706778 P1	11/22/44	SM1120	CATALOG	12/2/44	1G A1 A3	CNA:D-851-2
MAR. 45		REV. 4	DEC. 44			FEB. 45		FIG. 3 SUB. 4
CAE-24382	TBM		CAY-24389	TOE-1		CM-24397	NK 13	
TOGGLE SWITCH; DPST. CONTACTS RATED, 10 VOLTS AT 250V DC, 15 AMPS AT 125V AC. BALL TYPE HANDLE.			SWITCH; SPST ONE BREAK PER CIRCUIT NORMALLY CLOSED 250 VOLTS, 10 AMPS, AC.			POWER SWITCHING UNIT; SIMILAR TO -301243 EXCEPT DOES NOT HAVE TRANSFORMER AND IS IN A SMALLER BOX.		
11/15/44	#8244	CAY:P-7706778 P8	11/2/44	887441	22-A-156P1-15	12/5/44	D-153057	
NOV. 44		REV. 4	DEC. 44		REV 12	JAN. 45		
RQ-24383	JP-1 JP-2 JP-3		CYD-24390	TBL-2		CAE-24398	QJB	
HYDROPHONE SWITCH UNIT INCLUDES A SPRING LOADED SELECTOR SWITCH FOR CONNECTING HYDROPHONE WINDINGS EITHER IN SERIES AIDING OR SERIES OPPOSING. RECEPTACLE FOR HYDROPHONE CABLE, 2 MFD PAPER CAPACITOR, AND ON OUTPUT RECEPTACLE TO CONNECT TO INPUT OF THE AUDIO			TOGGLE SWITCH; DPST, 2 BREAKS PER CIRCUIT; CONTACTS RATED 20 AMPS AT 250 VOLTS, 20 AMPS AT 125 VOLTS. BLACK NON-INDICATING HANDLE.			SWITCH, TOGGLE; 4 PDT, CENTER OFF POSITION. CONTACTS RATED 50 AMPS, 15 VOLTS DC; 25 AMPS, 125 VOLTS AC. BAT TYPE HANDLE WITH RADIO ACTIVE TIP.		
11/20/44			11/3/44	3982	CAY:M-7407473	12/7/44	8881K2	CW:BA-10177-6
JAN. 45			FEB. 45		P 1 REV 2	JAN. 45		ISS. 5
AMPLIFIER.			CSZ-24391	QJB		CAE-24399	QJB	
			PUSH BUTTON SWITCH; TWO CIRCUIT DRIP PROOF, ONE CIRCUIT NORMALLY ON MOMENTARILY OFF, OTHER CIRCUIT NORMALLY OFF MOMENTARILY ON. CONTACTS RATED: 10 AMPS, 60 VOLTS AC; 4 AMPS 115 VOLTS DC; 1 AMP, 230 VOLTS DC; AND 1/2 AMP, 550 VOLTS DC.			SWITCH, TOGGLE; DPST, TWO POSITIONS: ONES OPEN, ONE CLOSED. CONTACTS RATED, 75 AMPS, 15 VOLTS DC AND 25 AMPS, 125 VOLTS AC. BAT TYPE HANDLE WITH RADIOACTIVE TIP.		
			11/16/44	9001, LIST 01	1899-D11	12/7/44	8701K2	CW:BA-10177-8
			DEC. 44		REV 1	JAN. 45		ISS. 5
-24384	GEN. USE	RE 24A 159	CHU-24392	AN/URA-T2	RE 24F 151	CHU-24400	SV	RE 24F 151
SWITCH, MICROPHONE(HANDSET); PUSHBUTTON SWITCH PLATE, 3 CONTACT SPRINGS. RATED 2.5 AMPS AT 14.0 VOLTS DC.			SWITCH-SENSITIVE; SPST, NORMALLY OPEN, MOMENTARY CONTACT, ROLLER LEAF TYPE ACTUATOR, MOVEMENT DIFFERENTIAL 0.010" TO 0.030". OPERATING PRESSURE 3 TO 5 OUNCES, PRESSURE DIFFERENTIAL 1/2-1 OZ, OVERTRAVEL 1/16".			SWITCH, SENSITIVE; SPDT, MOVEMENT DIFFERENTIAL 0.0002" TO 0.0003". CONTACTS RATED 10 AMPS, 125 VOLTS AC; 5 AMPS, 250 VOLTS AC. OPERATING PRESSURE 7-8 1/2 OZ. PRESSURE DIFFERENTIAL 1/4 TO 2 OZ. OVERTRAVEL 1/16".		
10/13/44			11/17/44	G-RL2	CKV:A-72000	12/8/44	B2-RS	CW:BA-10052-12
DEC. 44			FEB. 45		P 1 REV 0	FEB. 45		ISS. 11

Class 24—Switches

3.24-21

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CMU-24401 SV	RE 24F 151		CHH-24408 SO-7M/7N			CCX-24416 SV		
SWITCH, SENSITIVE PUSH BUTTON: SPDT, CONTACTS RATED 10 AMPS AT 125 VOLTS AC, AND 5 AMPS AT 250 VOLTS AC. MOVEMENT DIFFERENTIAL UNDER 0.0005" OPERATING PRESSURE 7-9 OZ. PRESSURE DIFFERENTIAL 1-3 OZ. OVERTRAVEL 7/32".			SWITCH TOGGLE: DPST, CONTACTS RATED 3 AMPS AT 115 VOLTS DC. MODIFIED FOR ROTARY OPERATION. CIRCUIT CLOSURES WITH CLOCKWISE ROTATION.			SWITCH, TIME DELAY: MOTOR RATED 115V 60 CPS 450 RPM INTER- NALLY GEARED TO GIVE AN OUTPUT SPEED TO THE SHAFT OF 1 RPM PRESET FOR 120 SEC ±10% TIME DELAY, SWITCH TO BE MU-SWITCH CORP. TYPE MBS-2 SPDT NORMALLY OPEN. CONTACTS RATED 125V 60 CPS 15 AMPS AC 12/21/44 445P32 JAN. 45		
12/8/44 BZ-RQ1		CW:BA-10052-3	12/14/44 8947-BE		CRP:DL-G28-5074			
FEB. 45		ISS. 11	MAR. 45		REV. 6 G1			
CW-24402 SV			CUH-24409 SO 7M/7N	RE 24F 151		CCX-24416		
SWITCH, SENSITIVE: SPST, NORMALLY CLOSED, LEAF TYPE ACTUA- TOR. CONTACT RATING 10 AMP AT 125 VOLTS AC, AND 5 AMPS AT 250 VOLTS AC. MOVEMENT DIFFERENTIAL 0.02" TO 0.04". SIMILAR TO -24107 EXCEPT FOR ANGLE OF ACTUATOR. SAME AS -24107 EXCEPT LEAF IS FORMED 12/8/44 ESL-688166-4 JAN. 45			SWITCH, SENSITIVE: SPST NORMALLY OPEN. CONTACTS RATED 10 AMPS AT 115 VOLTS AC. OPERATING PRESSURE 2 TO 3 OUNCES. PRESSURE DIFFERENTIAL 1/2 TO 1 OZ. OVERTRAVEL 1/16". MOVEMENT DIFFERENTIAL 0.005 TO 0.015.			(CW) SPEC KS-10149 LIST 01 ISS. 5)		
		ESL-688166-4	12/15/44 4 MZGW-21		CRP:V-28-5068			
		ISS. 9	MAR. 45		REV. 4			
			CGC-24410 SO 7M/7N					
			SWITCH, LEVER: DPDT, 1 BK PER CIRCUIT, 3 POSITION TOG- GLE TYPE. CONSISTS OF 2 SETS OF SPDT CONTACTS WITH OPEN NEUTRAL. RATED 10 AMPS AT 110 V. AC. HANDLE NICKEL PLATED BRASS WITH THREADED LOCK INSIDE.					
			12/18/44 MCL-FS-27-		CRP:U28-5071-1			
			MAR. 45		REV. 11			
			CHH-24411 SO 7M/7N					
			SWITCH, SELECTOR: DPDT, BOTTOM CONNECTED, 1-OFF, 2-OFF, CONTACTS RATED 60 AMPS AT 115-600 VOLTS AC.					
			12/18/44 81246-G		CRP:U-28-5098			
			JAN. 45		REV. D			
			CHH-24412 SO 7M/7N					
			SWITCH, TOGGLE: SPST, CONTACTS RATED 6 AMPS AT 250 VOLTS DC OR 12 AMPS AT 125 VOLTS DC. BAT HANDLE EXTRA LONG (LONG BUSHING FOR MTG) NO LUMINESCENT TIP.					
			12/18/44 8373K2		CHL:25233			
			JAN. 45		ALT. 11-30-44			
			CAE-24404 OCB					
			SWITCH, TOGGLE: DPDT, CONTACTS RATED 3 AMPS 125V AC. BALL TYPE HANDLE. 15/32" BUSHING.					
			12/13/44 8373K2		CHL:25233			
			JAN. 45		ALT. 11-30-44			
			CMU-24405 OCB	RE 24F 151				
			MICRO SWITCH: SPDT, SHORT ROLLER LEAF TYPE ACTUATOR. MOVEMENT DIFFERENTIAL 0.030" MAX. OVERTRAVEL 0.062" MIN. OPERATING FORCE 1.5 OZ. MAX. PRESSURE DIFFERENTIAL 1/2 OZ.					
			12/14/44 BZ-2FW221		CML:25235			
			MAR. 45		ALT. 0			
			CHH-24406 SV					
			SWITCH, SNAP: DPST, NORMALLY OPEN, CONTACTS RATED: 10 AMPS/115V AC, 5 AMPS AT 230/450/600 VOLTS AC; 10 AMPS/115V DC, 5 AMPS/230V DC, 3 AMPS/450V DC, 2 AMPS/600V DC.					
			12/14/44 81212SB		CW:KS-15119L01			
			JAN. 45		ISS. 1 APP. 1			
			CHH-24407 SV					
			SWITCH, SNAP: DPST, NORMALLY OPEN, CONTACTS RATED: 60 AMPS AT 115/230/450/600V AC; 60 AMPS AT 115/230V DC, 40 AMPS/450V DC AND 30 AMPS /600V DC.					
			12/14/44 81243SB		CW:KS-15119L02			
			JAN. 45		ISS. 1 APP. 1			
			1/10/45 S9588353-D		724533			
			JAN. 45		REV. 13			
			12/28/44 CHH:3592 KD					
			JAN. 45					CBM:746-589

RESTRICTED

NAVSHIPS 900,109

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	
CHH-24421-A SWITCH, PUSH BUTTON SPST, MOMENTARILY OPEN, NORMALLY CLOSED. CONTACTS RATED 3 AMPS AT 250 VOLTS. RED PUSH BUTTON. SAME AS -24421 EXCEPT FOR THE COLOR OF THE BUTTON.	5/1/45 JUN. 45	SIMILAR TO 3592 Q	CHH-24428 RBL SERIES SWITCH, ROTARY ASSEMBLY: OPERATES NAVY TYPE -24146 SPST TOGGLE SWITCH AND NAVY TYPE -24147 OPST TOGGLE SWITCH SIMULTANEOUSLY TO PROVIDE A 3 PST ROTARY SWITCH. 3 AMPS. 250 VOLTS.	12/30/44 JAN. 45	CHH-1570-NH CHA:D-666-1 REV. 6	CRY-24436 CRY-50194 SWITCH, PUSH BUTTON SPST, NON-LOCKING, SILVER, NON-WIPING CONTACTS.	1/10/45 JAN. 45	M-141864-503 CRY:M-141864-503 REV 5	
CFS-24422 UJ SWITCH, LEVER: DPDT, CENTER-OFF POSITION. LOCKING IN ALL POSITIONS.	12/28/44 FEB. 45	CBM:746-5, CBM:746-5, ALT 1 12/28/44 1425 FEB. 45	CDU:DD-3491-B *SEE ABOVE	CMU-24429 SR RE 891B LINE SWITCH, DPST, 4 TERMINALS. CONTACTS RATED 200 AMPS AT 250V DC. INCLUDES 2 FUSES RATED 200 AMPS AT 250V DC. ENCLOSURE DRIP PROOF. METHOD OF OPENING: INTERLOCKED HINGED COVER. MTG: BULKHEAD. INSULATION: CLASS A. MEETS 2000 FT # SHOCK TEST. 1/1/45 NAVY TYPE KE CMU:A-408 APR. 45 CMU TYPE A-408-2	1/10/45 JAN. 45	8825-K4 CAE:CATALOG	CAE-24437 DAQ SWITCH, TOGGLE DPDT, BAT-HANDLE, RATED 3 AMPS 250V AT NO LOAD, 20 AMPS AT RESISTIVE LOAD OF 24 VOLTS.	1/10/45 JAN. 45	8825-K4 CAE:CATALOG
CAY-24423 TBK-11 SWITCH, KNIFE: 14 PDT, ALL 14 BLADES INTERCHANGEABLE. CAPABLE OF OPERATING AT 5500V AT 0.4 AMPS, 2300V AT 2.3 AMPS, AND 110V AT 2.5 AMPS.	12/29/44 JAN. 45	NA T-7605032 ISS. 5 PT34-35 NY-3961	CTD-24430 ST SWITCH, INTERLOCK SPST, RATED 10 AMPS. AT 125V AC, 5 AMPS. AT 250V AC. DOOR TYPE SWITCH OF BLACK MOLDED BAKELITE.	1/3/45 APR. 45	4600 CW:ESA-688432-2 ISS. 4 *	CAY-24438 TBU-4.TAB-6 MAIN LINE SWITCH 3PST NORMALLY CLOSED. CONTACTS RATED 600 VOLTS AC AT 50 AMPS, TRIPPING CURRENT.	1/11/45 JAN. 45	AB-S#545393 7609267 P100 REV 15	
CAE-24424 OBC SWITCH, TOGGLE: DPDT, WIPING TYPE CONTACTS RATED AT 10 AMPS, 250V AC OR 15 AMPS AT 125V AC. SINGLE HOLE, MOUNTED BY A 16/32" DIAM BY 15/32" LONG BUSHING SCREW TYPE TER- MINALS.	12/30/44 JAN. 45	CAE:B690 ISS. 9	CH:ESA-682080-6 ISS. 9	CAE-24431 -20341 SWITCH, TOGGLE DPST CONTACTS RATED 5 AMPS AT 250V AC 10 AMPS AT 125V AC. BAT TYPE HANDLE.	1/4/45 APR. 45	730K2 CCG:E-78A-2	CATR-24439 AN/APA-17A RE24F151 SENSITIVE SWITCH SPST, NORMALLY OPEN. CONTACT RATINGS 10 AMPS AT 115 VOLTS AC, 5 AMPS AT 250 VOLTS AC, 1000 WATTS AC. OVERTRAVEL 7/32". OPERATING PRESSURE 12-16 OZ., RE- LEASE PRESSURE 6-8 OZ. MOVEMENT DIFFER- ENTIAL 0.01. OVERTRAVEL PRESSURE 1 1/2-3 1/13/45 R07-1P FEB. 45	1/13/45 FEB. 45	R07-1P CATK:R07-1P
CMU-24425 QJB RE 24F 151 SWITCH, SENSITIVE SPST NORMALLY OPEN PIN PLUNGER TYPE MICROSWITCH. SILVER CONTACTS RATED 10 AMPS 125V AC 5 AMPS 250V AC. MOVEMENT DIFFERENTIAL 0.0004-0.002". OPERATING PRESSURE 9 TO 13 OZ., OVERTRAVEL 0.005" MINIMUM, AIR GAP OF 0.02" MINIMUM.	12/30/44 FEB. 45	CMU:YZ-2R FEB. 45	CW:BA-10052-46	CEE-24432 -20341 E-139B-1 SWITCH, THERMAL NORMALLY CLOSED. CONTACTS RATED 10 AMPS AT 110 OR 220V AC OR 30V DC. SWITCH MUST OPEN AT TEMP. OF 145°F ± 3°F AND CLOSE AT 135°F ± 3°F.	1/4/45 JAN. 45	C-4351-17 JAN. 45	CAE-24433 TDE SWITCH, TOGGLE SPST, ONE BREAK PER CIRCUIT, ONE EX- TREME POSITION ON ONE EXTREME POSITION OFF, NO CENTER POSITION. CONTACTS RATED 80 AMPS AT 24 VOLTS DC. BAT TYPE HANDLE. LUMINESCENT TIP.	1/5/45 JAN. 45	#8851K1 CAE:CATALOG SKETCH
CM-24426 QJB STATION, PUSH BUTTON: TWO PUSH BUTTON, MOISTURE RESISTANT, NON-LOCKING TYPE, KEYS MOUNTED ON A COMMON METAL FRAME. KEYS HAVE HEAVY PALLADIUM CONTACTS WHICH ARE RATED AT 1.0 AMPS 50 VOLTS AC MAX. AND 0.6 AMP 50V DC MAX. EACH KEY HAS TWO SECTIONS	12/30/44 JAN. 45	CM:D-169098 JAN. 45	CW:BA-104854 ISSUE 1	CAE-24434 TDE SWITCH, TOGGLE SPDT, TWO CIRCUIT, NO OFF POSITION. LE- VER THROWN IN ONE POSITION CLOSSES ONE CIRCUIT, THROWN IN OTHER POSITION CLOSSES SECOND CIRCUIT. CONTACTS RATED 5 AMPS AT 125V AC, 35 AMPS AT 24 VOLTS AC. BAT TYPE HANDLE WITH LUMINESCENT TIP.	1/5/45 JAN. 45	#8210K8 CAE:CATALOG SKETCH	CFN-300160-1 REV. 2 1/13/45 #8370 JAN. 45	1/13/45 JAN. 45	#8370 P9 REV 6 *
CM-24426 WHICH OPERATE SIMULTANEOUSLY. RIGHT SEC- TION CONSISTS OF DPDT SET OF CONTACTS, LEFT SECTION CONSISTS OF A SPST NORMALLY CLOSED AND A SPST NORMALLY OPEN SET OF CONTACTS.				CAE-24435 TDE SWITCH, TOGGLE SPDT, TWO MOMENTARY CONTACTS NORMALLY OPEN. CENTER POSITION OFF. CONTACTS RA- TED 5 AMPS AT 125 VOLTS AC, 35 AMPS AT 24 VOLTS AC. BAT TYPE HANDLE WITH LUMI- NESCENT TIP.	1/5/45 JAN. 45	#8212K7 CAE:CATALOG SKETCH	CAY-24441 TCE SWITCH, INTERLOCK DPST, SINGLE BREAK. CONTACT RATING: 250 VOLTS, 6 AMPS AC. MOMENTARY TYPE.	1/13/45 JAN. 45	7809756/P1 REV. 1
CHH-24427 RBL SERIES SWITCH, ROTARY ASSEMBLY: OPERATES NAVY TYPE -24148 SPST TOGGLE SWITCH TO PROVIDE A SPST ROTARY SWITCH. 3 AMPS 250 VOLTS.	12/30/44 JAN. 45	CHH:81021-V JAN. 45	CNA:D-667-1 REV. 6	CHH-24442 SO-7M, SO-7M SWITCH, DUAL TOGGLE CONSISTS OF 2 SPDT TOGGLE SWITCHES AR- RANGED FOR ROTARY ACTION. FRONT UNIT TO MAKE BEFORE REAR UNIT BREAKS WHEN SHAFT IS ROTATED CLOCKWISE. CONTACTS RATED: FRONT UNIT 3 AMP 115V DC. REAR UNIT 1 AMP 115V DC. SWITCH SHOULD NOT BE ABLE 1/15/45 21490-BK JAN. 45	1/15/45 JAN. 45	#8212K7 CAE:CATALOG SKETCH	CRP:DU628-5075 REV 2		

Class 24—Switches

3.24-23

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
		CHH-24442	CMU-24449 SV	RE 24F 151		-24456 RBK	1/23/45	CHH:20902AM
		TO BE STALLED BETWEEN POSITIONS 1 & 2 WITH KNOB RELEASED. FRONT UNIT TO CONTROL.	SENSITIVE SWITCH			SWITCH, TOGGLE	JUN. 45	CAE:6360X2
			SPST NORMALLY OPEN. CONTACTS RATED AT 10 AMPS 125V AC 5 AMPS 250V AC. OVERTRAVEL 7/32" MAX. MOVEMENT DIFFERENTIAL UNDER 0.005". OPERATING PRESSURE 22-28 OZ. PRESSURE DIFFERENTIAL 18-24 OZ. PANEL MOUNT TYPE.			CPST. CONTACTS RATED 3 AMPS AT 250 VOLTS BALL TYPE HANDLE. 15/32" BUSHING.		CHL:60A123
			1/17/45 YZ-7RQIT	CW:BA-10052-4				REV C
			JAN. 45	ISS 12				
		CM-24443 TS-107/TPH-1	CATK-24450 SV			CHH-24457 RBK	1/23/45	CHL:60A117
		SWITCH LEVER	SWITCH, WIDGET			SWITCH, TOGGLE	JAN. 45	REV 0
		CONSISTS OF TWO DPDT (SIDE BY SIDE) IN LOWER HALF AND TWO SPST (SIDE BY SIDE) IN UPPER HALF. OPERATED SIMULTANEOUSLY. LOCKING IN MIDDLE POSITION, NON-LOCKING IN UPPER POSITION. NO THROW IN DOWN POSITION. CONTACTS RATED 0.5 AMP NON-1/19/45 CM:D-166856	SPST NORMALLY OPEN. CONTACTS RATED 10 AMPS AT 115V AC. 5 AMPS AT 250V AC. MOVEMENT DIFF 0.015" MAX. PLUNGER TRAVEL TO OPERATE 0.035" MAX. CONTACT PRESSURE 25 GRAMS MIN. CONTACTS SILVER. SNAP ACTION TYPE. EXPOSED CONTACTS.			DPST. CONTACTS RATED 1 AMP AT 250V DC, 3 AMPS AT 125V DC. BALL TYPE HANDLE. BUSHING 13/32" LONG, 15/32" DIA.		
		CW:BA-105947	1/17/45 G04-1A	CW:BA-10076-3				
		JAN. 45	JAN. 45	ISS 6				
		ISSUE 1						
		CAY-24443	CMU-24451 SO-1			CAE 24458 AN/TPS-18	1/23/45	CHL:60A117
		INDUCTIVE LOAD AT 50V DC, AND 0.4 AMP. INDUCTIVE LOAD AT 50V DC.	SWITCH, SENSITIVE			SWITCH, TOGGLE	JAN. 45	REV 0
			SPDT RATED 10 AMPS AT 115V AC. ROLLER-LEAF TYPE ACTUATOR. OPERATING PRESSURE 3 1/2-7 1/2 OUNCES. 1/4-2 1/2 OUNCES PRESSURE DIFFERENTIAL. .085" (MIN) OVERTRAVEL. .005"-.046" MOVEMENT DIFFERENTIAL.			DPST. CONTACTS RATED 20 AMPS AT 250V. 1 1/2 HP. 110-220 VOLTS AC OR DC. BAT TYPE LEVER. 15/32" BUSHING. SIMILAR TO -24136 EXCEPT FOR LENGTH OF LEVER AND SLIGHT DIFFERENCE IN CASE SIZE.		
			1/19/45 BZ-2RW21	CRP:S-28-5120				
			JAN. 45	REV Q				
		CM-24444 TS-107/TPH-1	CGC-24452 SO-1			CHU 24459 AN/TPS-18	1/23/45	CH:ESA-682060-7
		SWITCH PUSH BUTTON	SWITCH, LEVER			SWITCH MICRO	JAN. 45	ISS 10
		DPDT MOMENTARY TRANSFER. CONTACTS RATED 0.5 AMPS NON-INDUCTIVE LOAD AT 50V DC AND 0.4 AMPS INDUCTIVE LOAD 50V DC.	4PDT. CONSISTS OF 4 SPDT SETS OF CONTACTS, NEUTRAL OPEN POSITION, NON-LOCK IN UPPER POSITION, LOCK IN LOWER POSITION CONTACTS RATED 10 AMPS AT 125V AC. 2 AMPS AT 125V DC.			SPST, NORMALLY CLOSED RATED 25 AMPS AT 28.5V DC. BRACKET PUSH BUTTON. OPERATING PRESSURE 7 LBS., 3 LBS. MAX. PRESSURE DIFFERENTIAL. 1/8" OVER TRAVEL .006" (MAX.) MOVEMENT DIFFERENTIAL.		
		1/19/45 CM:D-161894-B	1/20/45 MCL-27-27-28-28	CRP:DUG28-5079-P1				
		JAN. 45	JAN. 45	REV 8				
		CW:BA-105968						
		ISSUE 1						
		CAE-24445 TBM	CGC-24453 SO, SO-A			CHU-24460 AN/TPS-18	1/23/45	CH:BA-10052-54
		SWITCH, INTERLOCK:	SWITCH, LEVER			SWITCH, MICRO	JAN. 45	ISS 13
		SPST, NORMALLY OPEN	4PDT. CONSISTS OF 4 SPDT SETS OF CONTACTS, NEUTRAL OPEN POSITION, NON-LOCK IN UPPER POSITION, LOCK IN LOWER POSITION. CONTACTS RATED 10 AMPS AT 125V AC. 2 AMPS AT 125V DC. SAME AS -24452 EXCEPT FOR SIZE OF MOUNTING HOLES AND SHAPE OF			SPST, NORMALLY OPEN RATED 25 AMPS AT 28.5V DC. BRACKET PUSH BUTTON. OPERATING PRESSURE 7 LBS., 3 LBS. MAX. PRESSURE DIFFERENTIAL. 1/8" OVERTRAVEL; .006" (MAX.) MOVEMENT DIFFERENTIAL.		
		CONTACTS RATED 0.075 AMPS AT 125 VOLTS. 0.025 AMPS AT 250 VOLTS.	1/20/45 MCL-27-27-28-28	CRP:DUG28-5079-P2				
			JAN. 45	REV 8				
		1/16/45 CM:D-161894-B						
		JAN. 45						
		CW:BA-105968						
		ISSUE 1						
		CAE:90-137						
		REV. 5						
		CGC-24453	CHH-24454 NHC			CHU-24462 SO-12M/12N	1/24/45	CRV:M-433211-1
		SWITCH, INTERLOCK:	SWITCH, PUSH BUTTON			SENSITIVE SWITCH	JAN. 45	REV 0
		SPST, NORMALLY OPEN	DPST NORMALLY OPEN. CONTACTS RATED 10 AMPS AT 125V DC. 10 AMPS. AT 125V AC. 2 BLACK BUTTONS.			SPDT. CONTACTS RATED 10 A. AT 125V AC, 5 A. AT 250V AC. 3 A. AT 450V AC, 2 A. AT 600V AC. 1/2 HP. 115-230-450V AC. INCLUDES ROLLER ARM ACTUATOR. THE ARM OF WHICH MAY BE ADJUSTED VERTICALLY THROUGH AN ARC OF 225°. THE ENTIRE ACTUATOR MAY		
		CONTACTS RATED 0.075 AMPS AT 125 VOLTS. 0.025 AMPS AT 250 VOLTS.	1/20/45 CHH:5946	CRV:M-303084-P174		1/25/45 BZE-RQ2		CRP:28-5153
			MAR. 45	REV 9		JAN. 45		
		1/16/45 #8410						
		JAN. 45						
		CAE:90-137						
		REV. 5						
		CGC-24453	CHH-24454			CHU-24462		
		SWITCH, INTERLOCK:	SWITCH, PUSH BUTTON			SENSITIVE SWITCH		
		SPST, NORMALLY OPEN	DPST NORMALLY OPEN. CONTACTS RATED 10 AMPS AT 125V DC. 10 AMPS. AT 125V AC. 2 BLACK BUTTONS.			SPDT. CONTACTS RATED 10 A. AT 125V AC, 5 A. AT 250V AC. 3 A. AT 450V AC, 2 A. AT 600V AC. 1/2 HP. 115-230-450V AC. INCLUDES ROLLER ARM ACTUATOR. THE ARM OF WHICH MAY BE ADJUSTED VERTICALLY THROUGH AN ARC OF 225°. THE ENTIRE ACTUATOR MAY		
		CONTACTS RATED 0.075 AMPS AT 125 VOLTS. 0.025 AMPS AT 250 VOLTS.	1/20/45 CHH:5946	CRV:M-303084-P174		1/25/45 BZE-RQ2		CRP:28-5153
			MAR. 45	REV 9		JAN. 45		
		1/16/45 #8410						
		JAN. 45						
		CAE:90-137						
		REV. 5						
		CGC-24453	CHH-24454			CHU-24462		
		SWITCH, INTERLOCK:	SWITCH, PUSH BUTTON			SENSITIVE SWITCH		
		SPST, NORMALLY OPEN	DPST NORMALLY OPEN. CONTACTS RATED 10 AMPS AT 125V DC. 10 AMPS. AT 125V AC. 2 BLACK BUTTONS.			SPDT. CONTACTS RATED 10 A. AT 125V AC, 5 A. AT 250V AC. 3 A. AT 450V AC, 2 A. AT 600V AC. 1/2 HP. 115-230-450V AC. INCLUDES ROLLER ARM ACTUATOR. THE ARM OF WHICH MAY BE ADJUSTED VERTICALLY THROUGH AN ARC OF 225°. THE ENTIRE ACTUATOR MAY		
		CONTACTS RATED 0.075 AMPS AT 125 VOLTS. 0.025 AMPS AT 250 VOLTS.	1/20/45 CHH:5946	CRV:M-303084-P174		1/25/45 BZE-RQ2		CRP:28-5153
			MAR. 45	REV 9		JAN. 45		
		1/16/45 #8410						
		JAN. 45						
		CAE:90-137						
		REV. 5						
		CGC-24453	CHH-24454			CHU-24462		
		SWITCH, INTERLOCK:	SWITCH, PUSH BUTTON			SENSITIVE SWITCH		
		SPST, NORMALLY OPEN	DPST NORMALLY OPEN. CONTACTS RATED 10 AMPS AT 125V DC. 10 AMPS. AT 125V AC. 2 BLACK BUTTONS.			SPDT. CONTACTS RATED 10 A. AT 125V AC, 5 A. AT 250V AC. 3 A. AT 450V AC, 2 A. AT 600V AC. 1/2 HP. 115-230-450V AC. INCLUDES ROLLER ARM ACTUATOR. THE ARM OF WHICH MAY BE ADJUSTED VERTICALLY THROUGH AN ARC OF 225°. THE ENTIRE ACTUATOR MAY		
		CONTACTS RATED 0.075 AMPS AT 125 VOLTS. 0.025 AMPS AT 250 VOLTS.	1/20/45 CHH:5946	CRV:M-303084-P174		1/25/45 BZE-RQ2		CRP:28-5153
			MAR. 45	REV 9		JAN. 45		
		1/16/45 #8410						
		JAN. 45						
		CAE:90-137						
		REV. 5						
		CGC-24453	CHH-24454			CHU-24462		
		SWITCH, INTERLOCK:	SWITCH, PUSH BUTTON			SENSITIVE SWITCH		
		SPST, NORMALLY OPEN	DPST NORMALLY OPEN. CONTACTS RATED 10 AMPS AT 125V DC. 10 AMPS. AT 125V AC. 2 BLACK BUTTONS.			SPDT. CONTACTS RATED 10 A. AT 125V AC, 5 A. AT 250V AC. 3 A. AT 450V AC, 2 A. AT 600V AC. 1/2 HP. 115-230-450V AC. INCLUDES ROLLER ARM ACTUATOR. THE ARM OF WHICH MAY BE ADJUSTED VERTICALLY THROUGH AN ARC OF 225°. THE ENTIRE ACTUATOR MAY		
		CONTACTS RATED 0.075 AMPS AT 125 VOLTS. 0.025 AMPS AT 250 VOLTS.	1/20/45 CHH:5946	CRV:M-303084-P174		1/25/45 BZE-RQ2		CRP:28-5153
			MAR. 45	REV 9		JAN. 45		
		1/16/45 #8410						
		JAN. 45						
		CAE:90-137						
		REV. 5						
		CGC-24453	CHH-24454			CHU-24462		
		SWITCH, INTERLOCK:	SWITCH, PUSH BUTTON			SENSITIVE SWITCH		
		SPST, NORMALLY OPEN	DPST NORMALLY OPEN. CONTACTS RATED 10 AMPS AT 125V DC. 10 AMPS. AT 125V AC. 2 BLACK BUTTONS.			SPDT. CONTACTS RATED 10 A. AT 125V AC, 5 A. AT 250V AC. 3 A. AT 450V AC, 2 A. AT 600V AC. 1/2 HP. 115-230-450V AC. INCLUDES ROLLER ARM ACTUATOR. THE ARM OF WHICH MAY BE ADJUSTED VERTICALLY THROUGH AN ARC OF 225°. THE ENTIRE ACTUATOR MAY		
		CONTACTS RATED 0.075 AMPS AT 125 VOLTS. 0.025 AMPS AT 250 VOLTS.	1/20/45 CHH:5946	CRV:M-303084-P174		1/25/45 BZE-RQ2		CRP:28-5153
			MAR. 45	REV 9		JAN. 45		
		1/16/45 #8410						
		JAN. 45						
		CAE:90-137						
		REV. 5						
		CGC-24453	CHH-24454			CHU-24462		
		SWITCH, INTERLOCK:	SWITCH, PUSH BUTTON			SENSITIVE SWITCH		
		SPST, NORMALLY OPEN	DPST NORMALLY OPEN. CONTACTS RATED 10 AMPS AT 125V DC. 10 AMPS. AT 125V AC. 2 BLACK BUTTONS.			SPDT. CONTACTS RATED 10 A. AT 125V AC, 5 A. AT 250V AC. 3 A. AT 450V AC, 2 A. AT 600V AC. 1/2 HP. 115-230-450V AC. INCLUDES ROLLER ARM ACTUATOR. THE ARM OF WHICH MAY BE ADJUSTED VERTICALLY THROUGH AN ARC OF 225°. THE ENTIRE ACTUATOR MAY		
		CONTACTS RATED 0.075 AMPS AT 125 VOLTS. 0.025 AMPS AT 250 VOLTS.	1/20/45 CHH:5946	CRV:M-303084-P174		1/25/45 BZE-RQ2		CRP:28-5153
			MAR. 45	REV 9		JAN. 45		
		1/16/45 #8410						
		JAN. 45						
		CAE:90-137						
		REV. 5						
		CGC-24453	CHH-24454			CHU-24462		
		SWITCH, INTERLOCK:	SWITCH, PUSH BUTTON			SENSITIVE SWITCH		
		SPST, NORMALLY OPEN	DPST NORMALLY OPEN. CONTACTS RATED 10 AMPS AT 125V DC. 10 AMPS. AT 125V AC. 2 BLACK BUTTONS.			SPDT. CONTACTS RATED 10 A. AT 125V AC, 5 A. AT 250V AC. 3 A. AT 450V AC, 2 A. AT 600V AC. 1/2 HP. 115-230-450V AC. INCLUDES ROLLER ARM ACTUATOR. THE ARM OF WHICH MAY BE ADJUSTED VERTICALLY THROUGH AN ARC OF 225°. THE ENTIRE ACTUATOR MAY		
		CONTACTS RATED 0.075 AMPS AT 125 VOLTS. 0.025 AMPS AT 250 VOLTS.	1/20/45 CHH:5946	CRV:M-303084-P174		1/25/45 BZE-RQ2		CRP:28-5153
			MAR. 45	REV 9		JAN. 45		
		1/16/45 #8410						
		JAN. 45						
		CAE:90-137						
		REV. 5						
		CGC-24453	CHH-24454			CHU-24462		
		SWITCH, INTERLOCK:	SWITCH, PUSH BUTTON			SENSITIVE SWITCH		
		SPST, NORMALLY OPEN	DPST NORMALLY OPEN. CONTACTS RATED 10 AMPS AT 125V DC. 10 AMPS. AT 125V AC. 2 BLACK BUTTONS.			SPDT. CONTACTS RATED 10 A. AT 125V AC, 5 A. AT 250V AC. 3 A. AT 450V AC, 2 A. AT 600V AC. 1/2 HP. 115-230-450V AC. INCLUDES ROLLER ARM ACTUATOR. THE ARM OF WHICH MAY BE ADJUSTED VERTICALLY THROUGH AN ARC OF 225°. THE ENTIRE ACTUATOR MAY		
		CONTACTS RATED 0.075 AMPS AT 125 VOLTS. 0.025 AMPS AT 250 VOLTS.	1/20/45 CHH:5946	CRV:M-303084-P174		1/25/45 BZE-RQ2		CRP:28-5153
			MAR. 45	REV 9		JAN. 45		
		1/16/45 #8410						
		JAN. 45						
		CAE:90-137						
		REV. 5						
		CGC-24453	CHH-24454			CHU-24462		
		SWITCH, INTERLOCK:	SWITCH, PUSH BUTTON			SENSITIVE SWITCH		
		SPST, NORMALLY OPEN	DPST NORMALLY OPEN. CONTACTS RATED 10 AMPS AT 125V DC. 10 AMPS. AT 125V AC. 2 BLACK BUTTONS.			SPDT. CONTACTS RATED 10 A. AT 125V AC, 5 A. AT 250V AC. 3 A. AT 450V AC, 2 A. AT 600V AC. 1/2 HP. 115-230-450V AC. INCLUDES ROLLER ARM ACTUATOR. THE ARM OF WHICH MAY BE ADJUSTED VERTICALLY THROUGH AN ARC OF 225°. THE ENTIRE ACTUATOR MAY		
		CONTACTS RATED 0.075 AMPS AT 125 VOLTS. 0.025 AMPS AT 250 VOLTS.	1/20/45 CHH:5946	CRV:M-303084-P174		1/25/45 BZE-RQ2		CRP:28-5153
			MAR. 45	REV 9		JAN. 45		
		1/16/45 #8410						
		JAN. 45						
		CAE:90-137						
		REV. 5						
		CGC-24453	CHH-24454			CHU-24462		
		SWITCH, INTERLOCK:	SWITCH, PUSH BUTTON			SENSITIVE SWITCH		
		SPST, NORMALLY OPEN	DPST NORMALLY OPEN. CONTACTS RATED 10 AMPS AT 125V DC. 10 AMPS. AT 125V AC. 2 BLACK BUTTONS.			SPDT. CONTACTS RATED 10 A. AT 125V AC, 5 A. AT 250V AC. 3 A. AT 450V AC, 2 A. AT 600V AC. 1/2 HP. 115-230-450V AC. INCLUDES ROLLER ARM ACTUATOR. THE ARM OF WHICH MAY BE ADJUSTED VERTICALLY THROUGH AN ARC OF 225°. THE ENTIRE ACTUATOR MAY		
		CONTACTS RATED 0.075 AMPS AT 125 VOLTS. 0.025 AMPS AT 250 VOLTS.	1/2					

Class 24—Switches

3.24-25

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CHH-24483	RAO-3		CFS-24491	OBO		CG-24499	SP-1M	
SWITCH, ROTARY ASSEMBLY OPERATES 2 NAVY TYPE -24146 TOGGLE SWITCHES EACH RATED 3 AMPS 125 VOLTS. PIN PLATE MOUNTED SO AS TO ACTUATE SWITCHES PROGRESSIVELY AND HAVE TOTAL CLOCKWISE SHAFT ROTATION OF 180°.			SWITCH, LEVER 4DPT, 12 SPRING, LOCK IN ONE POSITION, NON-LOCK IN OTHER POSITION.			SWITCH: 8 PDT, (CONSISTS OF 8 SPDT SWITCHETTES, EACH WITH ONE NORMALLY OPEN CONTACT AND ONE NORMALLY CLOSED), CONTACTS RATED: 3.5 AMPS 24V AC, 0.2 AMPS 125V DC, 10 AMPS 250V AC. TEMPERATURE RANGE 0°C TO 70°C. PLATING WITHSTANDS SALT SPRAY TEST OF 50 HOURS.		
2/15/45	1570 NR	CWQ:2A283	2/20/45	CFS:1424	CBM-746-158	2/24/45	CR1072-116-L2	RSec A007c
MAR. 45		ISS 8	MAR. 45		ALT 0	MAR. 45		
CHH-24484	RAO-3		CHH-24492	OBN		CG-24499		
SWITCH, ROTARY ASSEMBLY OPERATES ONE NAVY TYPE -24146 AND ONE NAVY TYPE -24147 TOGGLE SWITCH, EACH RATED 3 AMPS 125 VOLTS. PIN PLATE MOUNTED SO AS TO ACTUATE SWITCHES PROGRESSIVELY AND HAVE 180° TOTAL CLOCKWISE SHAFT ROTATION.			SWITCH, PUSH BUTTON DPST, MOMENTARY CONTACT; NORMALLY OPEN; 3 AMPS, 250V; 6 AMPS, 125V.					
2/15/45	1570 NQ	CWQ:2A282	2/21/45	81084	CDU:5-151	2/24/45	SIMILAR TO	CGEM-7470333 P2
MAR. 45	1570 NR	CNA:2E-948-1	MAR. 45			MAR. 45	4101	REV 4
		ISS C						
CATK-24485	AN/JRA-T2A	RE24F151	CHH-24493	JT		CDM-24500	SP-1M	
SWITCH, SENSITIVE SPDT; OPERATING PRESSURE 1-2 1/4 OZ.; PRESSURE DIFFERENTIAL 1/4 OZ. OVER-TRAVEL 7/32", 0.005"-0.046" MOVEMENT DIFFERENTIAL.			SWITCH, PUSH BUTTON DP NORMALLY OFF, QUICK MAKE AND QUICK BREAK, CONTACTS RATED 6 AMPS, 250V, 12 A 125V, 1HP, 250V.			SWITCH, LEVER: CONSISTS OF 1 SPST SWITCH AND 1 SPDT SWITCH, IS A TWO-POSITION SWITCH, NON-LOCKING IN BOTH POSITIONS, CONTACTS RATED 20 AMPS AT 110 VOLTS AC. BLACK CATALIN HANDLE.		
2/15/45	CATK:T286	CKV:A-72001	2/21/45	80630	CRV:M-131088	2/24/45	SIMILAR TO	CGEM-7470333 P2
MAR. 45		ISS 1	MAR. 45		CHANGE 2	MAR. 45	4101	REV 4
CG-24486	SU		CHH-24494	SP-1M		CDM-24501	SP-1M	
SWITCH, SINGLE CIRCUIT, NORMALLY CLOSED, DOUBLE BREAK. CONTACT RATINGS: 125V, 0.3 AMP DC 250V, 0.15 AMPS DC.			SWITCH, PUSH BUTTON SPST, NORMALLY OPEN, CONTACTS RATED 3 AMPS AT 250 VOLTS AC NICKLE-PLATED PUSH BUTTON.			SWITCH, LEVER: CONSISTS OF 1 SPST SWITCH AND 1 SPDT SWITCH, IS A TWO-POSITION SWITCH, NON-LOCKING IN UPPER POSITION, LOCKING IN LOWER POSITION, CONTACTS RATED 20 AMPS AT 110 VOLTS AC. BLACK CATALIN HANDLE.		
*CKB-41-A6027-1			2/22/45	3592 RA	CG:K35J906 P1	2/24/45	SIMILAR TO	CGM-7470333P5
2/19/45	CR 1070-	CFT:NCP40-3D-39/	MAR. 45		REV 2	MAR. 45	4101	REV 4
MAR. 45	C103A5	53 *						
COC-24487	RCB		CHH-24495	SP-1M		CAPB-24502	GEN. USE	
SWITCH, SLIDER SPDT NORMALLY CLOSED, FOR USE IN RF CIRCUITS ONLY. BAKELITE BASE.			SWITCH, TOGGLE SPST, NORMALLY OPEN, CONTACTS RATED 1 AMP AT 250V AC AND 3 AMPS, 125 VOLTS AC. METAL HANDLE WITH KEY WAY. AMBIENT TEMPERATURE RANGE -35°C TO +65°C.			ROTARY SWITCH: 16 POSITION, 6 WAFERS, ENCLOSED IN A WATERTIGHT STEEL CASE DESIGNED FOR BULK-HEAD MOUNTING.		
2/19/45	77	CHL:60A130	2/22/45	20994 - MK	CG:K-44J797P1	2/26/45		A-270
MAR. 45		ISS A	MAR. 45		REV 9	MAR. 45		ALT 0
COC-24488	RCB		CG-24496	SP-1M		CG-24503	SP-1M	
SWITCH, SLIDER SPST NORMALLY OPEN, FOR USE IN RF CIRCUITS ONLY. BAKELITE BASE.			SWITCH GANG: 12 PDT (CONSISTS OF 12 SPDT SWITCHETTES), CONTACTS RATED 10 AMPS AT 12V OR AT 24V.			SWITCH, PUSH BUTTON DPST, MOMENTARY CONTACT, ONE NORMALLY OPEN, ONE NORMALLY CLOSED, CONTACTS RATED 30 AMPS 115 VOLTS.		
2/19/45	70	CHL:60A061	2/23/45	CR1070-E104F2	CG:M-48J493	2/26/45	CR-2943	CG:K-8691490
MAR. 45		ISS A	MAR. 45		REV. 3	MAR. 45	L-5728348-G2	
COC-24489	RCB		CG-24497	SP-1M		CHH-24504	JT	
SWITCH, SLIDER DPST NORMALLY OPEN, FOR USE IN RF CIRCUITS ONLY. BAKELITE BASE.			SWITCH, PUSH BUTTON: DPST, NORMALLY OPEN, CONTACTS RATED 1.6 AMPS, AT 115V DC 0.8 AMPS AT 250V DC, A 0.2 AMPS AT 550V DC, 3.0 AMPS AT 110V DC 1.5 AMPS AT 220V AC, 0.75 AMPS AT 440V AC 0.6 AMPS AT 550V AC.			SWITCH, TOGGLE DPST, CONTACTS RATED 20 AMPS 250V, 1 HP, 230V AC. 2 HP 250V DC. NORMALLY CLOSED.		
2/19/45	71	CHL:60A062	2/23/45	CR2940-4982698-G7	CG:K-52J607	2/27/45	80421	CRV:M-131116
MAR. 45		ISS A	MAR. 45		REV. 2	MAR. 45		CHANGE 3
CHH-24490	UM		CHH-24498	CDU-60104		-24505	JT	RE13A481
SWITCH, TOGGLE DPDT CENTER OFF CONTACTS RATED 30 AMPS AT 125V AC, 20 AMPS AT 250V AC.			SWITCH, TOGGLE: SPDT, CONTACTS RATED 1 AMP, 250 VOLTS; 3 AMPS, 125 VOLTS, 7/16" BUSHING LENGTH, 3 LUG TERMINALS. BALL TYPE HANDLE.			SWITCH, PUSH BUTTON 2PDT, NORMALLY CLOSED NON LOCKING.		
2/20/45	80988	CG:K-59J392	2/23/45	CHH:21350		2/27/45	CHA:2006	CRV:M-131338
MAR. 45		REV 0	MAR. 45	CDU:5-10		MAR. 45		CHANGE 0

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------

RESTRICTED

NAVSHIPS 900,109

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CRA-24506 JT			CG-24513 SP-1M			CHH-24521 QGA		
SWITCH, PUSH BUTTON			SWITCH (SWITCLETTE)			SWITCH, PUSHBUTTON		
SPDT, ONE" BREAK-MAKE, SINGLE CIRCUIT.			TWO CIRCUIT, ONE NORMALLY OPEN ONE NORMALLY CLOSED, .020" GAP. CONTACTS RATED 115V, 10 AMPS, A.C.			DPST NORMALLY OPEN, MOMENTARY CONTACT, SILVER PLATED CONTACTS RATED AT 6 AMPS, 115 VOLTS, 60 CYCLES, PHENOLIC CASE.		
2/27/45 IS-33	CRV:W-151096		*CG:M-7472714, REV 1			3/9/45 810698	CBM:746-6A	
MAR. 45	CHANG E 4		3/9/45 CR-1070-C1U3-F3	CG:K-7101672		MAR. 45	ALT 0	
				*SEE ABOVE				
CHH-24507 SP-1M			CMU-24514 SO-4			CUM-24522 QGA		
SWITCH, TOGGLE			SWITCH, SENSITIVE			SWITCH, SENSITIVE		
DPST, NORMALLY OPEN, CONTACTS RATED 1 AMP, AT 250V DC, 3 AMPS, AT 125V DC. METAL HANDLE WITH KEY WAY.			SPDT, ROLLER PLUNGER ACTUATOR; MOVEMENT DIFFERENTIAL 0.0004 - 0.002 CONTACTS RATED 125V 10 AMPS A.C.; 250V, 5 AMPS A.C.			SPST, NORMALLY OPEN, 0.035 CONTACT SPACING, CONTACTS RATED 15 AMPS, 125V, 60 CYCLES, SILVER CONTACTS, OPERATING PRESSURE - 22 TO 28 OZS. PRESSURE DIFFERENTIAL - 20 TO 70% OF OPERATING PRESSURE. OVERTRAVEL - 7/32". CANCELLED		
2/27/45 20902-G2	CG:K-43J704 P2		3/7/45 BZ-2RQ91	CRP:28-5129		3/9/45 AGPN TYPE 2	CBM:746-449	
MAR. 45	REV 8		MAR. 45	ISS 2		MAR. 45	TYPE "P" ACTUATOR ALT 1	
CMU-24508 SP-1M			CMU-24515 SP-1M			-24523 QGB		
SWITCH, SENSITIVE			SWITCH, SENSITIVE			SWITCH, PUSH BUTTON		
SPST, NORMALLY CLOSED, CONTACTS RATED 10 AMPS AT 125V AC 5 AMPS AT 250V DC. OPERATING PRESSURE - 6 OZ. PRESSURE DIFFERENTIAL - 5 1/2 OZS. OVERTRAVEL - 1 1/16 IN. MOVEMENT DIFFERENTIAL - 0.010" TO 0.030". 2 SCREW TERMINALS.			SPDT CONTACTS RATED 3 AMPS AT 110 VOLTS. OVERTRAVEL - 90° MOVEMENT DIFFERENTIAL - 0.002" OR LESS, OPERATING PRESSURE - 8 TO 12 OUNCES. PRESSURE DIFFERENTIAL - 4 OUNCES MAX.			DPST, BOTH CONTACTS NORMALLY OPEN, ONE BREAK PER CIRCUIT, MOMENTARY CONTACT, CONTACTS RATED 5 AMPS AT 600 VOLTS AC MAX; 5 AMPS AT 250V DC MA.		
2/28/45 R-RL2T	CMU:10-12312		3/7/45 OP TYPE AR	CG:K-7894968		*CRV:K-843617 P1 & 2 REV 6		
MAR. 45	CG:M-8376878 REV 2		MAR. 45					
CDM-24509 SP-1M			CHH-24516 SP-1M			3/12/45 CSZ:B-20,CRV:K- CRV:W-303084		
SWITCH, LEVER			SWITCH, PUSH BUTTON			MAR. 45	843617 P-1 & 2 P-171 REV 9 *	
4PDT, 4 NORMALLY OPEN CONTACTS, 4 NORMALLY CLOSED, 3 POSITION SWITCH, LOCKING IN UPPER AND LOWER POSITIONS, CONTACTS RATED 10 AMPS, AT 110V AC. BREAK DOWN RATING CONTACTS TO GRD, 2000V AC. PLATED TO RESIST CORROSION OF A SALT SEA			DPDT CONTACTS RATED 1 AMP AT 250 V AC, 3 AMPS, AT 125V AC AMBIENT TEMPERATURE RANGE -40°C TO 90°C.					
2/27/45 SIMILAR TO 4101	CG:M-7470415		3/7/45 3599E	CG:K-54J549 P1		CSZ-24524 QGB		
MAR. 45			MAR. 45	REV 1		SWITCH, SENSITIVE		
						2 POLES, ONE NORMALLY OPEN, ONE NORMALLY CLOSED, ROLLER ARM OPERATED, OVERTRAVEL 55° WITH 5° CONTACT TRIP, CONTACTS RATED: 10 AMPS, 110V A.C. NORM, 27 AMP. INRUSH; 5 AMPS, 220V AC NORM, 13.5 INRUSH; 2.5 AMPS, 440V AC NORM, 7 AMPS INRUSH; .3 AMPS, 115V DC; .15 AMPS, 230V DC.		
ATMOSPHERE.	CDM-24509		CG-24517 SP-1M			4		
			SWITCH, TOGGLE			CSZ-24524		
			SPST NORMALLY OPEN, CONTACTS RATED 3 AMPS AT 250 VOLTS, 3 AMPS, AT 125 VOLTS. METAL LEVER WITH KEYWAY OR SLOT IN TIP.			RUSH; 2 AMPS AT 550V AC NORM. 6.5 AMP. INRUSH; .3 AMPS, 115V DC; .15 AMPS, 230V DC.		
			3/8/45 21379-F	CG:K-44J797P2				
			MAR. 45	REV 9				
CG-24510 SP-1M			CG-24518 SP-1M			CG-24525 QGB		
SWITCH, PUSH BUTTON			SWITCH, RANGE COMPENSATION			SWITCH, PUSH BUTTON		
SPDT, ONE NORMALLY OPEN CONTACT, ONE NORMALLY CLOSED CONTACT, CONTACTS RATED 3 AMPS AT 110 VOLTS DC. BLACK BUTTON.			CONSISTS OF 3 POTENTIOMETERS, NAVY TYPE -632933, ONE SYNCHRO GENERATOR MARK 5 MOD 2, ONE RESISTOR -63291 AND 3 SWITCHES, TYPE -24337.			DPDT, ONE NORMALLY OPEN, ONE NORMALLY CLOSED, CONTACTS RATED 10 AMPS, AT 600V AC OR DC MAX. CONTINUOUS.		
2/27/45 572921565	CG:K-7895232 P2		3/8/45	CG:P-64J3		3/12/45 CR-2943A200A	CRV:W-306520	
MAR. 45			MAR. 45	REV 2		MAR. 45	P105, REV 8	
CG-24511 SP-1M			CBZ-24519 SO-7M/7M			CHH-24526 QCB		
SWITCH, PUSH BUTTON			SWITCH, PUSHBUTTON			SWITCH, PUSH BUTTON		
SPDT, ONE NORMALLY OPEN CONTACT, ONE NORMALLY CLOSED CONTACT, CONTACTS RATED 3 AMPS AT 110 VOLTS DC. RED BUTTON.			WIPING CONTACTS - ONE CONTACT NORMALLY OPEN, ONE CONTACT NORMALLY CLOSED, CONTACTS RATED 1 AMP AT 115 VOLTS, TWO TWO BUTTONS - ONE BLACK, ONE RED.			DPDT SELF RETURN - OPEN AND CLOSE, ONE NORMALLY OPEN, ONE NORMALLY CLOSED, MOMENTARY CONTACT, CONTACTS RATED : 10 AMPS, AT 600V AC MAX.		
2/27/45 572921566	CG:K-7895232 P3		3/8/45 X66-182	CRP:DUG-28-5070		3/12/45 B2	CRV:W-306520	
MAR. 45			MAR. 45	REV 2		MAR. 45	P104, REV 8	
CMU-24512 SP-1M			CHH-24520 SS			CHH-24527 QCB		
SWITCH, SENSITIVE			SWITCH, TOGGLE			SWITCH, TOGGLE		
SPDT NORMALLY OPEN OPERATING PRESSURE - 5 OZ. MAX. PRESSURE DIFFERENTIAL - 4 1/2 OZ. OVERTRAVEL - 1/16". MOVEMENT DIFFERENTIAL - 0.050 MAX. POLES SEPARATED BY A PHENOLIC INSULATING PIECE.			DPST CONTACTS RATED 3 AMPS AT 250V, 6 AMPS AT 125 VOLTS, SLOTTED TYPE LEVER, TWO TERMINALS ON BOTH ENDS OF SWITCH.			DPDT, NO OFF POSITION, NORMALLY CLOSED, CONTACTS RATED 3 AMPS AT 250 VOLTS.		
3/1/45 BZ-2RLT	CMU:10-11695		3/9/45 81024-W	ESA-676800-15		3/12/45 #81029	CRV:K-858038-P1	
MAR. 45	MODIFIED		MAR. 45	ISSUE 57		MAR. 45	REV 5	

Class 24—Switches

3.24-27

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CHH-24528 SR-2 SWITCH, TOGGLE DPST CONTACTS RATED 10 AMPS 250 VOLTS. 15 AMPS. 125 VOLTS.	3/8/45 #80602 MAR. 45	K-889698-1 SUB 0	CHH-24534 QBE-1 SWITCH, TOGGLE DPDT CONTACTS RATED 1 AMP. AT 250 VOLTS. 3 AMPS AT 125 VOLTS. BALL TYPE HANDLE. 1/2" BUSHING.	3/13/45 20905 B.J. MAR. 45	CB1:746-195 ALT 0	CHH-24541 SL SWITCH, PUSH BUTTON DPST, NORMALLY OPEN. MOMENTARY CONTACT. CONTACTS RATED 3 AMPS AT 250 VOLTS. 6 AMPS AT 125 VOLTS. 9/16" BUSHING.	3/13/45 81084-D MAR. 45	CW:ESA-676800- 34, ISSUE 41
CDM-24529 SR-2 SWITCH, LEVER CONSISTS OF TWO PAIRS OF CONTACTS NORMALLY OPEN WHEN LEVER IS IN NEUTRAL CONTACTS RATED 10 AMPS, 110 VOLTS AC. LEVER IN ONE POSITION NON-LOCKING, CLOSES ONE PAIR OF CONTACTS AND IN OTHER POSITION, LOCKING, CLOSES SECOND PAIR OF CONTACTS.	3/8/45 #4101 MAR. 45	CRV:P-718846-3 SUB 6	CATK-24535 MAR SWITCH, MIDGET SPDT, 15 AMPS, 115V AC. OPERATING PRESSURE 6-9 OZ. MOVEMENT DIFFERENTIAL 0.005-0.010". PRETRAVEL 1/32". OVER- TRAVEL 1/32".	3/13/45 2HD4-1A MAR. 45	CRV:K-887825 REV 1	CHH-24542 SL-A SWITCH, TOGGLE DPDT CONTACTS RATED: 3 AMPS AT 250 VOLTS. 6 AMPS AT 125 VOLTS. BALL TYPE HANDLE. 13/32" BUSHING. TERMINALS EMERGE FROM ENDS. SAME AS -24228 EXCEPT FOR BEING SELF RESTORING TO SIDE OPPOSITE INDEX SLOT RATHER THAN TO THE INDEX SLOT.	3/14/45 81057-E8 MAR. 45	CW:ESA-676800- 69, ISSUE 41
CDM-24530 SR-2 SWITCH, TURN TYPE 8 PDT LOCKING IN BOTH POSITIONS - CON- TACTS RATED 10 AMPS. 110 VOLTS AC.	3/8/45 #6302 MAR. 45	CRV:P-719849-2 SUB 0	CDM-24536 MAR SWITCH LEVER CONTACTS RATED 10 AMPS, 110V AC. 3 POSITIONS, CENTER POSITION (O) NEUTRAL, LOCKING IN ALL 3 POSITIONS. LOWER POSITION (1) CONSISTS OF 2 BANKS OF CON- TACTS; CONTACT ARRANGEMENT: ON LEFT, 3 SP MAKE; ON RIGHT; 2 SP MAKE AND 1 SPDT, UPPER POSITION (2) HAS LOCKING ACTION ONLY. NO CONTACTS.	3/14/45 4203 MAR. 45	CRV:P-719699-1 REV 3	CDM-24543 MAR SWITCH, LEVER CONTACTS RATED 10 AMPS, 110V AC. 2 POSITIONS, BOTH LOCKING. LOWER POSITION (1) HAS 2 BANKS OF CONTACTS; CONTACT ARRANGEMENT: ON LEFT, 1SP MAKE, AND 1 SPDT; ON RIGHT, 1 SPDT, UPPER POSITION (2) HAS LOCKING ACTION ONLY; NO CONTACTS.	3/14/45 4202 MAR. 45	CRV:P-719699-3 REV 3
CHH-24531 SR-2 SWITCH, PUSHBUTTON SPST NORMALLY OPEN CONTACTS RATED 3 AMPS. 250V.	3/8/45 3592K MAR. 45	CRV:K-686508-1 SUB 2	CDM-24536 MAR SWITCH LEVER CONTACTS RATED 10 AMPS, 110V AC. 2 POSITIONS, BOTH LOCKING LOWER POSITION (1): SPDT CONTACTS ON LEFT SIDE NONE ON RIGHT, UPPER POSITION (2) CONSISTS OF 2 BANKS OF CONTACTS; CONTACT ARRANGEMENT: ON LEFT, 1 SP MAKE; ON RIGHT 1 SP MAKE.	3/13/45 80710 MAR. 45	CBM:746-159 ALT 1	CDM-24544 MAR SWITCH, LEVER CONTACTS RATED 10 AMPS, 110V AC. TWO POSITIONS, BOTH LOCKING LOWER POSITION (1): SPDT CONTACTS ON LEFT SIDE NONE ON RIGHT, UPPER POSITION (2) CONSISTS OF 2 BANKS OF CONTACTS; CONTACT ARRANGEMENT: ON LEFT, 1 SP MAKE; ON RIGHT 1 SP MAKE.	3/14/45 S#1240604-B MAR. 45	*SEE ABOVE
CHH-24531-A SU SWITCH, PUSH BUTTON SPST, MOMENTARILY CLOSED, NORMALLY OPEN. CONTACTS RATED 3 AMPS AT 250 VOLTS. BLACK BUTTON. SAME AS -24531 EXCEPT FOR THE COLOR OF THE BUTTON.	5/1/45 3592 K JUN. 45	CRV:K-886508 P1 SUB. 2	CHH-24537 QBE-3b SWITCH, PUSHBUTTON SPDT CONTACTS RATED 1 AMP AT 250 VOLTS, 3 AMPS. AT 125 VOLTS. SILVER-PLATED CON- TACTS. SOLDERED LUG TERMINALS.	3/13/45 80710 MAR. 45	CBM:746-159 ALT 1	CAY-24545 T8L-6 SWITCH, DISCONNECT: 3 PST CONTACTS RATED 60 AMPS, POWER SUPPLY 440/3/60. SWITCH INTERLOCKS WITH CABINET DOOR.	*CAY:8-A-4686 LINE 1 REV 8 CAY:35-J-705 P 4 3/14/45 S#1240604-B MAR. 45	*SEE ABOVE
CDM-24532 SR-2 SWITCH, LEVER DPST CONSISTS OF 2 S P BREAK PAIRS OF CONTACTS NON-LOCKING IN BOTH POSITIONS, LOCKING IN MID POSITION, ONE ONLY OPEN IN LEFT POSITION, OTHER ONLY OPEN IN RIGHT POSITION. CONTACTS RATED 10 AMPS 110 VOLTS AC.	3/9/45 124101 MAR. 45	CRV:P-718846-8 SUB 6	CHH-24538 MK 3 MDD 2&3 SWITCH ASSEMBLY ROTARY TOGGLE CONSISTS OF 2 NAVY TYPE -24079 DPDT SWITCHES ON SPECIAL MOUNTING WHICH PRO- VIDE A 4PDT SWITCH WITH CONTACTS RATED 6 AMPS AT 125 VOLTS. ROTARY TYPE CONTROL.	3/13/45 1570 SPECIAL MAR. 45	CW:8L-34166 ISSUE 2	CW-24546 SL-A SWITCH, LEAF: SPST, NORMALLY OPEN. CONTACTS RATED 0.6 AMPS AT 50 VOLTS CADMIUM CONTACTS.	3/15/45 MAR. 45	CW:80-13361-1 ISS. 3
CAE-24533 QGB SWITCH, TOGGLE DPST, NORMALLY OPEN. CONTACTS RATED: 15 AMPS AT 125V DC, 10 AMPS. AT 250V AC. BAT TYPE HANDLE.	3/12/45 7360K8 MAR. 45	CRV:K-882015P-1 REV 2	CMU-24539 SD-3 SWITCH, SENSITIVE SPST NORMALLY CLOSED, PANEL MOUNT, OVER- TRAVEL - 7/32" MOVEMENT DIFFERENTIAL - UNDER 0.0005". OPERATING PRESSURE - 7 TO 9 OZS. PRESSURE DIFFERENTIAL - 1 TO 3 OZS.	3/13/45 WZ-ROF MAR. 45	CRV:K-874468 REV 0	CHH-24547 SD SWITCH, TOGGLE: DPDT CONTACTS RATED 10 AMPS AT 125 VOLTS 5 AMPS AT 250 VOLTS. FLUSH TUMBLER TYPE SWITCH WITH 1" PORCELAIN BASE. NON-IN- DICATING.	3/15/45 8660 MAR. 45	CATALOG
			CHH-24540 SL-A SWITCH, TOGGLE DPST CONTACTS RATED: 3 AMPS. AT 250 VOLTS, 6 AMPS. AT 125 VOLTS. BALL TYPE HANDLE. BUSHING 15/32" DIA -32TD. 3/4" LENGTH.	3/13/45 81024-U MAR. 45	CW:ESA-676800- 27, ISSUE 41	CWA-24548 TCE SWITCH, KNIFE: DPST CONTACTS RATED 125 VOLTS AT 60 AMPS. UNFUSED REAR CONNECTED.	*CAY-31J-119/PT16/REV 4 CWA-2641,2644 3/19/45 9S-4318-L APR. 45	*SEE ABOVE

RESTRICTED

NAVSHIPS 900,109

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CAVA- 24549 TBK-9 SWITCH, KNIFE: DP-ST CONTACTS RATED 250 VOLTS, 30 AMPS UNFUSED, REAR CONNECTED.			CDM- 24557 SA SWITCH, LEVER: CONSISTS OF 4 SECTIONS 2 OF WHICH ARE SPST AND TWO OF WHICH ARE DPDT, ALL 4 LOCKING. CONTACTS RATED: 2 AMPS AT 110V DC, 10 AMPS AT 110V AC.			CAE- 24565 TCZ-1 SWITCH, TOGGLE: 3PDT, NORMALLY CLOSED. CONTACTS RATED 10 AMPS AT 250V AC. BALL TYPE HANDLE. 15/32" BUSHING.		
*CAVA-2641,2644, CAY-24-J-933 IT 21 3/19/45 9S-4115-L APR. 45 *SEE ABOVE			3/22/45 CRV:M-415987/P15 APR. 45 REV 15			3/26/45 8660 COL-260000800 APR. 45 REV. 0		
CAVA- 24550 TBK-9,13 SWITCH, KNIFE: DP-ST CONTACTS RATED 250 VOLTS, 60 AMPS UNFUSED, REAR CONNECTED.			CDM- 24558 SA SWITCH, LEVER: CONSISTS OF 4 SECTIONS, 2 OF WHICH ARE SPST AND TWO OF WHICH ARE DPDT ALL 4 LOCKING. CONTACTS RATED: 2 AMPS AT 110V DC, 10 AMPS AT 110V AC. SAME AS -24557 EXCEPT FOR LOCATION OF SECTIONS.			CDM- 24566 TCZ-1 SWITCH, LEVER: CONSISTS OF 6SPST NORMALLY CLOSED BREAK SWITCHES AND 3SPDT NORMALLY CLOSED BREAK BEFORE MAKE SWITCHES. CONTACTS RATED 10 AMPS AT 125V AC. LOCKING IN POS. 0 AND POS. 1, NO THROW FOR POS. 2.		
*CAVA-2641,2644 CAY-335-408 P-24 REV 23 3/19/45 9S-4116-L APR. 45 *SEE ABOVE			3/22/45 CRV:M-415987/P14 APR. 45 REV 14			3/26/45 4101 COL-5020210004 APR. 45 REV 3		
CYD- 24551 BN SWITCH INTERLOCK: MALE, CONTACTS RATED 10 AMPS 125V, 5 AMPS 250V DOOR TYPE SWITCH.			CAE- 24559 NXsr-79991 DISCONNECT SWITCH: DPST FUSED, MANUALLY OPERATED. CONTACTS RATED 250 VOLTS, 70 AMPS. CONTINUOUS DUTY. 50°C AMBIENT CLASS A INSULATION WITH DRIP PROOF INSULATION. CANCELLED			CHH- 24567 TCZ SWITCH, TOGGLE: SPST, NORMALLY OPEN. CONTACTS RATED 1 AMP AT 250 VOLTS, 3 AMPS AT 125 VOLTS. BAT TYPE HANDLE. 15/32" BUSHING.		
CANCELLED			3/22/45 4109H9 CAE-998-1-6M1 APR. 45 PI# 611-1002 ALT 0			3/26/45 20994-ET COL-266101000 APR. 45 REV 1		
* CRV:K-860597/P2/REV 4 3/20/45 46003 CFN-300159-1 APR. 45 REV. 3			CAE- 24560 TCZ SWITCH, TOGGLE: SPST NORMALLY OPEN, NON-LOCKING IN "ON" POSITION. CONTACTS RATED 20 AMPS AT 24 VOLTS DC. BAT TYPE HANDLE. 11/32" BUSH- ING. ABLE TO WITHSTAND 100 HR. SALT SPRAY TEST.			3/26/45 1561 CRV:K-888158-1 APR. 45 REV. 1		
CHH- 24552 YF SELECTOR SWITCH ASSEMBLY: 24 POLE, 5 ACTIVE POSITIONS EACH POLE, ONE OFF POSITION EACH POLE. BRASS, SILVER-PLATED CONTACTS RATED 5 AMPS AT 125V DC OR 10 AMPS AT 125V AC. SWITCH IS SNAP-ACTION ROTARY.			3/24/45 8817K2 COL-2601100 00 APR. 45 REV D9805			CHH- 24568 MAR SWITCH, ROTARY: SPST, RATED 1 AMP, 250V; 3 AMPS, 125V.		
3/21/45 2400 CRP-28-5139 APR. 45			CAE- 24561 BN-1 SWITCH, TOGGLE: SPST, RATED 3 AMPS, 250 VOLTS.			CGC- 24569 TCZ SWITCH SENSITIVE: SPST, ONE NORMALLY CLOSED CONTACT. LEAF TYPE ACTUATOR. LEAKAGE CURRENT NOT TO EXCEED 50 MA WITH 28 VOLTS SUPPLIED BE- TWEEN ANY TWO CONTACTS OR BETWEEN CON- TACTS AND GROUND. TO WITHSTAND 200 HR. SALT SPRAY TEST. 3/27/45 CXA-1040 COL-983A-3 APR. 45 REV D7456		
CAE- 24553 SA SWITCH TOGGLE: DPDT CONTACTS RATED 3 AMPS, 250 VOLTS. 6 AMPS AT 125 VOLTS. BALL TYPE HANDLE. BUSHING - 15/32".			3/24/45 8908 CFN-300270-1 APR. 45 REV 3			CGE- 24570 TCZ SWITCH, SENSITIVE: SPST, NORMALLY OPEN CONTACT LEAF. LEAK- AGE CURRENT NOT TO EXCEED 50 MA WITH 28 VOLTS SUPPLIED BETWEEN ANY TWO CONTACTS OR BETWEEN CONTACTS AND GROUND. TO WITH STAND 200 HR. SALT SPRAY TEST. ROLLER LEAF TYPE ACTUATOR. 3/27/45 CXA-825 COL-981A-2 APR. 45 ACTUATOR CX596 REV D8375		
3/21/45 8373 CRV:K-876133 P1 APR. 45 REV 1			CG- 24562 BN-1 SWITCH, PUSH BUTTON: SPST, NORMALLY CLOSED CONTACTS RATED 5 AMPS, 125 VOLTS.			CGE- 24571 TCZ SWITCH, SENSITIVE: SPST ONE NORMALLY OPEN CONTACT LEAF. LEAKAGE CURRENT NOT TO EXCEED 50 MA WITH 28 VOLTS SUPPLIED BETWEEN ANY 2 CONTACTS OR BETWEEN CONTACTS AND GROUND. TO WITH STAND 200 HR. SALT SPRAY TEST. ROLLER LEAF TYPE ACTUATOR. 3/27/45 CXA-838 COL-1048A-4 APR. 45 ACTUATOR CX596 REV D5597		
CHH- 24554 SA SWITCH, TOGGLE: TUMBLER-TYPE TOGGLE. DPST REAR CONNECT- ED. CONTACTS RATED 10 AMPS AT 125 VOLTS AC OR DC. RECTANGULAR BLACK COMPOSITION HANDLE.			3/24/45 GA13A1 CFN-300161-1 APR. 45 REV 2			CGE- 24572 TCZ SWITCH, SENSITIVE: CONSISTS OF 3P, ONE SPDT, ONE SPST NOR- MALLY OPEN, AND ONE SPST NORMALLY CLOSED LEAKAGE CURRENT NOT TO EXCEED 50 MA WITH 28 VOLTS SUPPLIED BETWEEN ANY TWO CONTACTS OR BETWEEN ANY CONTACTS AND GROUND AFTER 200 HR. SALT SPRAY TEST. 3/27/45 CXA-931 COL-11368-4 APR. 45 ACTUATOR CX-596 REV. 4		
3/21/45 3986 CRV:K-860380 P1 APR. 45 REV 1			CG- 24563 TCZ-1 SWITCH, PUSH BUTTON: SPST NORMALLY OPEN CONTACTS RATED 3 AMPS AT 125V AC, 1/2 AMP AT 125V DC. BLACK NICKEL FINISH ON NOZZLE, SHAFT AND NUTS. WILL WITHSTAND 200 HR. SALT SPRAY TEST.					
CHH- 24555 SA-3 SWITCH, TOGGLE: TUMBLER TYPE TOGGLE SWITCH. DPST NOR- MALLY OPEN. CONTACT RATINGS: 30 AMPS AT 250 VOLTS AC OR DC. BAT TYPE HANDLE. BAKELITE BASE. METAL PARTS TO WITHSTAND 200 HRS. 20% SALT SPRAY TEST.			3/24/45 1GA-19A44 COL-265000300 APR. 45 REV D7345					
3/21/45 4272 CRV:K-877771 APR. 45 REV 6			CDM-24564 TCZ SWITCH, LEVER: CONSIST OF 5SPST NORMALLY CLOSED BREAK SWITCHES AND ONE SPDT NORMALLY CLOSED BREAK BEFORE MAKE SWITCH. CONTACTS RATED 10 AMPS AT 125V AC. LOCKING IN POS. 0 AND POS. 1 NO THROW IN POS. 2.					
CAE- 24556 SA-3 SWITCH, TOGGLE: 4PDT NORMALLY CLOSED. CONTACTS RATED 1 AMP AT 250V DC, 3 AMPS AT 125V DC. BAT TYPE HANDLE. WITHSTANDS 200 HR. 20% SALT SPRAY TEST.			3/26/45 4101 COL-AC102H APR. 45					
3/21/45 8885 CRV:K-883099 P1 APR. 45 REV 2								

3.24-30

Class 24—Switches

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CSZ- 24592	TEB		CHH- 24600	BT		CAE- 24607	TCS-15	
CONTROL STATION SWITCH; 2 BUTTON HORIZONTAL MOUNTING SWITCH 3 POLE, DOUBLE THROW CONTACT RATING 600V AC AND DC.			SWITCH, TOGGLE DPST, NORMALLY OPEN. CONTACTS RATED 12 AMPS. AT 125V DC. BAT TYPE HANDLE. 3/8"-32 KTG. STUD SLOTTED.			SWITCH, PUSH BUTTON; NORMALLY OPEN INTERLOCK SWITCH, MOMENTA- RY CONTACT, CONTACTS RATED 3 AMPS, 250V, AND 6 AMPS, 125V.		
4/2/45	#B30SYMBOL 5	2165-D1	4/10/45	806008D	CQJ:SKETCH	4/12/45	891K14	CKP:SW-1016AK-A
APR. 45	BULLETIN 9001	REV. 0	APR. 45			APR. 45		
CYV- 24593	TEB		CG- 24601	SC		CYD- 24608	T8S-8	
SWITCH, PLATE; KNIFE SWITCH SPDT, CONTACTS RATED 100 AMPS 250V.			ROTARY SWITCH, FILAMENT 5 POSITIONS, 11 CONTACTS, CONTACT #1 RATED 1 AMP 115V AC; CONTACT #3, 4, 5, 6 RATED 1.2 AMPS 115V AC; CONTACT #7 RATED 4.6 AMPS 115V AC; CONTACT #9, 10, 11 RATED 5 AMPS, 115V AC; CONTACT #2 AND 8 BLANK. CONTACTS TO BREAK BEFORE MAKE. 4/10/45 6202394G1 CG:M-7465675 P1			SWITCH, PUSH BUTTON SPST, NORMALLY OPEN, ONE MAKE AND ONE BREAK PER CIRCUIT. CONTACTS RATED 10 AMPS AT 125 VOLTS, 5 AMPS. AT 250 VOLTS.		
4/2/45	PH19A-4	19A-A-1	4/10/45	6202394G1	CG:M-7465675 P1	4/13/45	5501	CRV:K-854949 P2
APR. 45			APR. 45	(MODIFIED)		MAY 45		REV 2
CAE- 24594	AN/CPN-6		CG- 24602	SC-4		CYM- 24609	T8S-8	
SWITCH, PUSH BUTTON; DPST RATED 20 AMPS AT 125V. "BLACK" BUTTON IN AND "RED" BUTTON OUT NORMALLY MAKING CONTACT.			SWITCH, TOGGLE DPST CONTACTS RATED 30 AMPS, 250 VOLTS OR 60 AMPS 125 VOLTS. OPEN TYPE TUMBLER SWITCH - KNIFE BLADE TYPE.			SWITCH, PUSH BUTTON SPST, NORMALLY OPEN, LOCKING TYPE. CON- TACTS RATED 1/2 AMP. AT 30 VOLTS DC. SI- MILAR TO -24047 EXCEPT LATTER IS NON- LOCKING.		
4/9/45	7955H1	CGG-40B100892	4/11/45	218910	CG:M-7460849 P2	4/13/45	2001 L	CRV:K-850856 P1
APR. 45		ISS. B	APR. 45		REV 1	MAY 45		REV 6
CAE- 24595	AN/CPN-6		CHH- 24603	SC-4		CDM- 24610	SC-3	
SWITCH, PUSH BUTTON; DPST RATED 20 AMPS AT 125V "RED" BUTTON IN FOR NORMAL TRANSMIT POSITION AND "BLACK" BUTTON IN FOR NORMAL MODULATING POSITION.			SWITCH ASSEMBLY; CONSISTS OF TWO TOGGLE SWITCHES TYPES -24528 AND -24139 MOUNTED IN TANDEM AND ARRANGED FOR ROTARY ACTION.			SWITCH, LEVER CONSISTS OF 4 BANKS OF CONTACTS - 2PST ON UPPER LEFT, 3PST ON UPPER RIGHT, 3PST ON LOWER LEFT AND 3PST ON LOWER RIGHT. THREE POSITIONS, NORMALLY OPEN. CONTACTS RATED 10 AMPS. AT 110 VOLTS. ALL POSI- TIONS LOCKING. 4/17/45 4101 SERIES CG:M-48J71		
4/9/45	7955H1	CGG-40B100903	4/11/45	80602820905	CG:M-7471782	4/17/45	4101 SERIES	CG:M-48J71
APR. 45		ISS. B	APR. 45		REV 2	MAY 45		REV 0
CAE- 24596	AN/CPN-6		CDM- 24604	SC-4		CGT- 24611	SC-3	
SWITCH, PUSH BUTTON; DPST RATED 10 AMPS AT 125V. 3 BUTTONS "MANUAL" AND "AUTO" ARE BLACK, "OFF" IS RED. NORMALLY OPERATING "AUTO" IS IN "MANUAL" AND "OFF" ARE OUT.			SWITCH LEVER; CONSISTS OF 6SP MAKE CONTACTS. THREE POSITIONS - POSITION #0 NEUTRAL. POSITION #1 1 SPST ON THE LEFT, 1 DPST ON THE RIGHT NON-LOCKING NORMALLY OPEN. POSI- TION #2 - 1SPST ON THE LEFT, 1DPST ON THE RIGHT, NORMALLY OPEN, LOCKING. CONTACTS 4/12/45 4101 (SERIES) CG:M-7470005			SWITCH, LEVER DPST, NORMALLY CLOSED. CONTACTS RATED 30 AMPS. AT 600 VOLTS DC, 7 1/2 HP, 30 AMPS 250V AC 2 HP; 30 AMPS, 250V DC 5 HP.		
4/9/45	7900H7	CGG-40C100902	4/12/45	4101 (SERIES)	CG:M-7470005	4/17/45	72261	CG:K-7881360
APR. 45		ISS. B	APR. 45		REV. 1	MAY 45		REV 0 *
CAE- 24597	AN/CPN-6		CDM- 24604			CDM- 24612	SP-1H	
SWITCH, PUSH BUTTON; SPST (WITH JUMPING) RATED 10 AMPS AT 125V. NORMALLY OPEN. FLUSH TYPE MOUNT- ING.			RATED 10 AMPS AT 110V AC.			SWITCH, LEVER 16PST, NORMALLY OPEN, FOUR SECTIONS. EACH SECTION 4PST, TWO POSITIONS, CON- TACTS RATED 10 AMPS, 110 VOLTS AC EACH POLE.		
4/3/45	8870 H0D	CGG-40B100905	4/17/45	4101-X18A	CG:4101-18XA	4/17/45	4101-X18A	CG:4101-18XA
APR. 45		ISS. B	MAY 45			MAY 45		
CAE- 24598	AN/CPN-6		CG- 24605	SC-4		CHH- 24613	QCR	
SWITCH, INTERLOCK; SPST RATED 12 AMPS AT 125V.			SWITCH, TOGGLE; DPST CONTACTS RATED 30 AMPS AT 125 VOLTS. SIMILAR TO -24052 WITH CONTACTS REVERSED FOR TRIPLE OPERATION.			SWITCH ASSEMBLY, ROTARY CONSISTS OF 2 TOGGLE SWITCHES MOUNTED FOR ROTARY OPERATION, EACH SWITCH (CHH TYPE 81012 AC) IS DPST WITH SILVER CON- TACTS RATED 3 AMPS AT 250 VOLTS, WIPING ACTION.		
4/3/45	8655K	CGG-40B100904	4/12/45	286652	CG:M-7465200	4/18/45	21490 AP	CBN:746-15A
APR. 45			APR. 45		P2 REV 3	MAY 45		ALT 0
CHH- 24599	OAX		CDM- 24606	SC-4		CAE- 24614	QCR	
SWITCH, TOGGLE; DPST CONTACTS RATED 3 AMPS AT 125 VOLTS. BAT HANDLE, 21/32" PUSHING. SIMILAR TO -24507 EXCEPT FOR HANDLE.			SWITCH, LEVER; CONSISTS OF 4 BANKS OF CONTACTS -3PST 04 UPPER RIGHT 3PST ON LOWER RIGHT, 2PST ON UPPER LEFT 4PST LOWER LEFT - ALL CONTACTS NORMALLY OPEN, THREE POSITIONS ALL LOCKING, CONTACTS RATED 10 AMPS 110 VOLTS AC. 4/12/45 4101 (SERIES) CG:M-55J508			SWITCH, PUSH BUTTON SPST, NORMALLY OPEN, CONTACTS RATED 10 AMPS. MAKE, 2.5 AMP. BREAK AT 500 VOLTS AC; 0.4 AMPS. MAKE OR BREAK AT 345 VOLTS DC. AMBIENT TEMPERATURE 40°C OR 50°C.		
4/9/45	20902 FG	CQJ:SKETCH	4/12/45	4101 (SERIES)	CG:M-55J508	4/19/45	631-186	CGM:746-25
APR. 45			APR. 45		REV. 0	MAY 45		ALT 0

Class 24—Switches

3.24-31

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CHH-24615	MAC		CHH-24622	TDQ		CAE-24629	AN/SPR-2	
SWITCH, PUSH BUTTON 2 CIRCUITS, NORMALLY OPEN, ONE NORMALLY CLOSED, CONTACTS RATED 30 AMPS, 375V DC, 30 AMPS, 500V AC. (CBM TYPE 609-17)			SWITCH, PUSH BUTTON DPST, NORMALLY OPEN, CONTACTS RATED 20 AMPS, 125 VOLTS DC, BACK CONNECTED, TWO BLACK BUTTONS.			SWITCH, TOGGLE DPDT RATED 100 MA AT 28V DC.		
4/20/45	2110	CBM:746-7	4/24/45	3948	K-882641 P1	4/26/45		CGG:40A106911
MAY 45		ALT 0	MAY 45		REV 0	MAY 45		ISS 0
CATK-24616	NFA		CHH-24622-A	QCQ-2		CHH-24630	RBL-3	
SWITCH, KNIFE SPDT, RETURN ACTION LOOP FOR CAM OPERATION, CONTACTS RATED 7.5 AMPS, 230V AC, 15 AMPS, 115V AC, BERYLLIUM SPRING AND CENTER BLADE, OTHER PARTS BRASS NICKLE-PLATED.			SWITCH, PUSH BUTTON DPST, NORMALLY OPEN, CONTACTS RATED 20 AMPS, 125V DC, BACK CONNECTED, TWO BLACK BUTTONS, SAME AS -24622 EXCEPT FOR ADDITION OF MOUNTING BRACKETS.			SWITCH ASSEMBLY ROTARY OPERATES ONE NAVY TYPE 24146 AND ONE NAVY TYPE -24147 TOGGLE SWITCH, EACH RATED 3 AMPS, 125 VOLTS SECOND PIN ON PIN PLATE MOUNTED SO AS TO ACTUATE BOTH SWITCHES SIMULTANEOUSLY AND HAVE TOTAL CLOCKWISE SHAFT TRAVEL OF 90° +10° -0°.		
4/20/45	RO	CBM:746-580	4/24/45	3948	CRV:K-860379 P2	4/26/45	1570NM(MOD)	CWQ:2A278
MAY 45		ALT 1	MAY 45		REV 3	MAY 45		ISSUE C
CAE-24617	QCH-1	19RE23J1400A	CHU-24623	SS	RE 24F 151	CHH-24630		
SWITCH, LIMIT DPDT, ONE NORMALLY OPEN, ONE NORMALLY CLOSED, CONTACTS TO OPERATE IN CIRCUIT AT 175-335V DC, 11-5.6 AMPS, REVERSIBLE MOUNTING PLATE.			SWITCH, SENSITIVE SPDT, ROLLER LEAD ACTUATED, CONTACTS RATED 10 AMPS, 125V AC; 5 AMPS, 250V AC, OVERTRAVEL 0.141", MOVEMENT DIFFERENTIAL 0.012 TO 0.078, OPERATING PRESSURE 1-3 1/2 OZ, AIR GAP 0.02" MIN.			SAME AS -24428 EXCEPT FOR SHAFT TRAVEL.		
4/20/45	ORDER #		4/25/45	BZ-2RW2T	CW:BA-10052-57			
MAY 45	A-874381		MAY 45		ISS 14			
CHH-24618	VF		CHH-24624	VD-2		CHH-24631	MK 22	
SWITCH, TOGGLE DPDT, CONTACT RATINGS 6 AMPS, AT 115 VOLTS, 15/32" BUSHING, BALL TYPE HANDLE.			SWITCH, ROTARY CONSISTS OF A TOGGLE SWITCH WITH A FLATTED SHAFT AND BRACKET ADDED FOR ROTARY ACTION, DPDT, NO OFF POSITION, CONTACTS RATED 3 AMPS, 250 VOLTS, 6 AMPS, 125 VOLTS, CONTACTS SILVER PLATED.			SWITCH, PUSH BUTTON TWO CIRCUITS - ONE CKT, NORMALLY ON, ONE CKT, NORMALLY OFF, CONTACTS RATED 1 AMP, AT 125V AC, SLOW MAKE, SLOW BREAK MOMENTARY CONTACTS.		
4/23/45	81029 65	CRP:28-5111	4/21/45	8947BG PLUS	CRP:L28-5096	4/26/45	3392	CW:BA-11718 P2
MAY 45			MAY 45	81027		MAY 45		ISSUE 4
CSZ-24619	TDQ		CARL-24625	TDQ		CAE-24632	NXsr-84985	
SWITCH, PUSH BUTTON SPST, NORMALLY OPEN, MOMENTARY CONTACT, SINGLE CIRCUIT, CONTACTS RATED 5 AMPS, AT 115 VOLTS, 2 AMPS AT 230 VOLTS, 0.4 AMPS AT 550 VOLTS, 6 WIRE CONTROL RED BUTTON.			SWITCH, MERCURY SPST RATED AT 10 AMPS, 110 VOLTS, CART-RIDGE TYPE GLASS TUBE WITH TWO 5" LONG LEADS, CIRCUIT COMPLETED WHEN TUBE IS TURNED.			SWITCH, LEVER 3 PST, CONTACTS RATED 10 AMPS AT 240 VOLTS AC, SCREW TYPE TERMINALS.		
4/24/45	KB-1	CRV:K-842822 P6	4/23/45	CARL:C-465-2	C-465-2	4/26/45	8794K3	A90-440
MAY 45		REV 3	MAY 45		REV.	MAY 45		REV B
CSZ-24619-A	TDQ		CARL-24626	TDQ		CAE-24633	MK-22	
SWITCH, PUSH BUTTON SPST, NORMALLY OPEN, MOMENTARY CONTACT, SINGLE CIRCUIT, CONTACTS RATED 5 AMPS, AT 115 VOLTS, 2 AMPS AT 230 VOLTS, 0.4 AMPS, AT 550 VOLTS, SAME AS -24619 EXCEPT FOR 6 WIRE CONTROL GREEN BUTTON.			SWITCH, MERCURY SPST RATED 5 AMPS, 110 VOLTS, SAIL TYPE, OPEN CIRCUITED WHEN AIR SUPPLY FAILS.			SWITCH, PUSH BUTTON START-STOP TYPE SWITCH WITH TWO PUSH BUTTONS, CONSISTS OF 2 SPST MOMENTARY CONTACT SWITCHES ONE NORMALLY OPEN OPERATED BY A BLACK PUSH BUTTON, ONE NORMALLY CLOSED OPERATED BY A RED PUSH-BUTTON, FLUSH MOUNTING, CONTACTS RATED		
4/24/45	KB1-G201	CRV:K-842822 P2	4/23/45	CARL:C-43-A1X	DR-2396	4/26/45	86-481-6	CW:BA-10189-1
MAY 45		REV 3	MAY 45		REV 0	MAY 45		ISSUE 2
CBM-24620	WAB	55RE23J1423	CBZ-24627	TDQ		CAE-24633		
SWITCH SPDT, NORMALLY CLOSED, CONTACTS RATED 10 AMPS, AT 75 VOLTS DC.			SWITCH, PUSH BUTTON DP CONTACTS RATED 3 AMPS 115 VOLTS, ONE POLE NORMALLY OPEN, ONE POLE NORMALLY CLOSED, TWO BUTTONS: GREEN AND RED.			5.5 AMPS AT 440V DC.		
*CBM:756-3006, 756-116, 756-118, 756-117 756-252			4/23/45			CBZ:BULLETIN 800 Y-4575-D		
4/24/45			MAY 45			CHG. 6/29/42		
756-3006			*SEE ABOVE					
MAY 45								
CBM-24621	WAB	55RE23J1423	CHU-24628	TDQ		CHA-24634	LAF-1	
SWITCH SPDT, NORMALLY OPEN, CONTACTS RATED 10 AMPS, AT 75V DC.			SWITCH, TOGGLE SPST CONTACTS RATED 20 AMPS, 250 VOLTS.			SWITCH, JACK 3 PDT, CENTER OFF POSITION.		
*CBM:756-3005, 756-113, 756-114, 756-115 756-252			4/23/45			763		
4/24/45			MAY 45			CRB:SW-1026		
756-3005			*SEE ABOVE			ISSUE A		
MAY 45								
			4/23/45	CHU:2971	CYJ:SK12-226	4/26/45	763	CRB:SW-1026
			MAY 45		REV 0	MAY 45		ISSUE A

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------

RESTRICTED

NAVSHIPS 900,109

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CMU-24635	QGA	RE 24F151	CG-24643	TEH	16T13(CRE)	CHH-24648	WBA	
SWITCH, SENSITIVE SPDT CONTACTS RATED 10 AMPS AT 125V AC. 5 AMPS. AT 250V AC. OPERATING PRESSURE 6 TO 9 1/2 OZ.; PRESSURE DIFFERENTIAL 1 TO 3 OZS; OVER TRAVEL - 3/16"; MOVE- MENT DIFFERENTIAL - UNDER 0.0005".			TRANSMISSION LINE SWITCHING UNIT: USED AS TERMINATION & CONNECTION BOX FOR FOUR RG-19/U COAXIAL CABLES. PROVIDES READY CONNECTION BY MEANS OF LINKS BETWEEN ANY ONE OF TWO TRANSMIT- TERS AND ANY ONE OF THE 2 TRANSMISSION LINES TO THE TYPE CG-471116 ANTENNA			SWITCH, TOGGLE DPDT CONTACTS RATED 1 AMP. 250 VOLTS. 3 AMPS. AT 125V. SILVER-PLATED CONTACTS. BUSHING LENGTH 5/16". HANDLE END IN HALF AND SLOTTED. CBM TYPES 746-93 AND 746-219		
4/26/45	BZV-RQ9		5/2/45	HL7111760G1	CG:SK62647-13- 109	5/9/45	1571	CBM:C-145
MAY 45			MAY 45			MAY 45	SEE ABOVE	
CHH-24636	QCM		CG-24643			CHH-24649	QGC	
SWITCH, TOGGLE 3 PST CONTACTS RATED 30 AMPS. AT 250 VOLTS. 20 AMPS. AT 600 VOLTS. STRAIGHT RECTANGULAR HANDLE.			COUPLING UNIT. INSTALLED AT REAR OF TYPE CG-50259 HIGH POWER AMPLIFIER UNIT.			SWITCH, PUSH BUTTON 2 CIRCUIT, SINGLE THROW, ONE NORMALLY OPEN, ONE NORMALLY CLOSED. CONTACTS RATED 10 AMPS. 125V AC.		
(CBM TYPE 746-67)						GCHH:A86-323, CBM TYPE 746-94.		
4/28/45	80104	CBM:C-152				5/9/45	613-164	CBM:746-94
MAY 45						MAY 45	SEE ABOVE	ALT 0
CHN-24637	SK-1M		CMU-24644	UN	RE 24F151	CM-24650	QCS	
SWITCH, TOGGLE DPDT, TWO POSITION. CONTACTS RATED 30 AMPS. 125 VOLTS. SIMILAR TO NAVY TYPE -24490 EXCEPT HAS NO CENTER "OFF" POSITION AND HAS DIFFERENT MTG. LUGS.			MICRO-SWITCH SPST NORMALLY OPEN. CONTACTS RATED 10 AMPS. 125V AC TO 2 AMPS. 600V AC, 1/2 HP AT 115, 230 AND 460V AC. OPERATING PRESSURE 7 TO 8 1/2 OZ. PRESSURE DIF- FERENTIAL 1 1/4 TO 2 OUNCES, OVERTRAVEL 1/16". MOVEMENT DIFF. 0.002 TO 0.003".			SWITCH, LEVER CONSISTS OF 2 SECTIONS A/B, EACH 3P 3- POSITION, ALL LOCK. (POS. #1) A SECTION HAS 2 CLOSED ONE OPEN CONTACTS; B SEC- TION HAS 2 OPEN ONE CLOSED. (POS. #2- CENTER) A HAS 2 OPEN ONE CLOSED; B HAS 2 CLOSED ONE OPEN. (POS. #3) A HAS 2 5/3/45 479HL CBM:746-14 ALT 0 MAY 45 CBM:TYPE 746-14		
5/7/45	80988 MOD	CG:K-7111635-1	6/3/45	YZ-RS	CM:BA-10052-6			
MAY 45		REV 0	MAY 45		ISS 13			
CMA-24638	CRY-50254		CMU-24644			CLOSED CH-24650 ONE OPEN. B HAS 2 CLOSED ONE OPEN. COM- TACT RATING: 0.5 AMP. NON-INDUCTIVE 0.4 AMP. INDUCTIVE 60V DC.		
SWITCH 3 P BREAK 3 CONTACTS. NON-LOCKING. CON- TACTS RATED 5 AMPS. 110V AC. 60 CYCLES. SAME AS -24369 EXCEPT HAS 3 POLES.			"S" SPRING PLUNGER ACTUATED.					
5/7/45		K-189977						
MAY 45		SUB 1						
CAUS-24639	AN/SPT-6A		CM-24645	GEN. RADAR USE		CMU-24651	QCN-4	RE 24F 151
SWITCH, PUSH BUTTON NORMALLY OPEN, BUTTON ENGRAVED "BATTLE SMART".			RADAR ORDER SWITCH 6 POSITION, MANUALLY OPERATED. SIMILAR TO TYPE CM-24316 EXCEPT FOR 6 CHANNELS & A NEW LIGHTING SYSTEM. FOR USE WITH TYPE CM-23AGU RADAR DISTRIBUTION SWITCH BOARD. DIMENSIONS 9" X 9" X 5 3/4" AP- PROXIMATELY. SUPPLY: 115/1/60 FOR PILOT			SWITCH, SENSITIVE SPST, NORMALLY OPEN. CONTACTS RATED 10 AMPS. 125V AC, 5 AMP. 250V AC. OPERATING PRESSURE 6 TO 9 1/2 OZS. PRESSURE DIF- FERENTIAL - 1 TO 3 OZS. OVERTRAVEL 3/16 INCH. MOVEMENT DIFFERENTIAL 0.0005" MAX.		
5/7/45	60221	CKV:L-62008-4	5/7/45			5/9/45	YZV-RQ9	CBM:546-854
MAY 45		REV 2	MAY 45			MAY 45		
CAE-24640	NXST-84985		CM-24645	LIGHTS.		COM-24652	SR-2	
SWITCH, PUSH BUTTON STATION; 2 CONTACTS, NORMALLY OPEN, RATED 10 AMPS AT 220V AC, CONTINUOUS DUTY. ONE HOLE MOUNTING UNIT, 2 BUTTONS.						SWITCH, LEVER 10 SECTIONS OF SPDT, SINGLE BREAK. CON- TACTS RATED 10 AMPS, 110V AC. NON-INDUC- TIVE. NORMALLY CLOSED IN ONE POSITION. LOCKING IN ONE POSITION, NO THROW IN OTHER POSITION.		
4/26/45	10250-H387-15	A-86-376				5/10/45	4101 SERIES	CRV:P-718846-6
MAY 45		REV C				MAY 45		REV 8
CAE-24641	NXST-84985		CAE-24646	AN/CPN-6		CG-24653	SR-2	
SWITCH, PUSH BUTTON; RED BUTTON, RATED 10 AMPS AT 220 VOLTS AC CONTINUOUS DUTY, 1 NORMALLY OPEN, 1 NORMALLY CLOSED CONTACT. ONE HOLE MOUNTING UNIT.			SWITCH, PUSH BUTTON SP WITH JUMPER ST. MOMENTARY OPERATING ACTION. NORMALLY CLOSED. CONTACTS RATED 10 AMPS AT 125 VOLTS.			SWITCH, PUSH BUTTON SPDT, MOMENTARY CONTACT, ONE CIRCUIT NORMALLY OPEN, ONE NORMALLY CLOSED. CON- TACTS RATED 30 AMPS. 115V AC. TWO BREAKS PER CIRCUIT. BLACK PUSH BUTTON.		
4/26/45	10250-H376-12	A-86-380	5/8/45	CAE:8871	CGG:408100905	5/10/45	5728348G-2	CRV:K-892867-2
MAY 45		REV A	MAY 45	(MODIFIED)	ISS. B *	MAY 45		REV 1
CGG PART NO. 40K100906								
CAE-24642	NXST-84985		CHH-24647	AN/CPN-6		CG-24653-A	SR-2	
SWITCH, PUSH BUTTON; MOMENTARY PUSH BUTTON UNIT, BLACK BUTTON. RATED 10 AMPS AT 220V AC, CONTINUOUS DUTY, 1 NORMALLY OPEN AND 1 NORMALLY CLOSED CONTACT. ONE HOLE MOUNTING UNIT.			SWITCH, STOP SINGLE POLE, DOUBLE BREAK, NORMALLY CLOSED. SILVER CONTACTS RATED 6 AMPS. AT 125V AC, 1.2 AMPS. AT 600V AC, 1.1 AMP. AT 250V DC.			SWITCH, PUSH BUTTON SPDT, MOMENTARY CONTACT, ONE CIRCUIT NORMALLY OPEN, ONE NORMALLY CLOSED. CON- TACTS RATED 30 AMPS, 115V AC. TWO BREAKS PER CIRCUIT. SAME AS -24653 EXCEPT HAS RED PUSH BUTTON.		
4/26/45	10250-H375-12	A-86-380	5/9/45	27970	CBM:746-476	5/10/45	5728348G-3	CRV:P-892867-1
MAY 45		REV A	MAY 45		ALT 0	MAY 45		REV 1

Class 24—Switches

3.24-33

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CHH-24654 SR-2 SWITCH, ROTARY DPST, SINGLE BREAK. CONTACTS RATED 60 AMPS, 600V AC.			CH-24661 FSA SWITCH, LEVER CONSISTS OF 1 SECTION OF CONTACTS 2 SETS OF SPDT EACH IN FRONT AND BACK HALF, 3 POSITIONS LOCKING. CONTACTS RATED 0.5 AMPS AT 48V NOMINAL AND 56 VOLTS MAXIMUM DC.			CHH-24669 OAH-3 SWITCH, TOGGLE DPST, RATED 6 AMPS 125 VOLTS. BALL TYPE LEVER. BUSHING LENGTH 13/32".		
5/10/45 NAVY PACKET MAY 45		CRV:M-433204-1 REV 2	5/10/45 0-162161AL MAY 45		CM:BA-108930 ISS 1	5/15/45 81009B MAY 45		CADU:10382-73 REV 0
CAYD-24655 SR-2 SWITCH, AIR INTERLOCK SPST, SINGLE BREAK. CONTACTS RATED 0.6 AMP, 110V AC. NORMALLY CLOSED. TO OPEN AT AIR PRESSURE OF 1 1/2 ± 1/2 IN. OF WATER, AND CLOSE AT PRESSURE OF 3/4 ± 1/4 IN. OF WATER.			CHH-24662 FSA SWITCH, ROTARY (SNAP ACTION) DPST, CONTACTS RATED 10 AMPS AT 115V AC, 5 AMPS AT 230/450/600V AC; 10/5/3/2 AMPS AT 115/230/450/600V DC. SIMILAR TO NAVY TYPE -24406 EXCEPT FOR USE OF 0.190-24 TAPPED MTG HOLES. SHORTER SHAFT AND TAPPED HOLE IN END OF SHAFT.			CHH-24670 OAH-3 SWITCH, PUSH BUTTON DPST, RATED 6 AMPS 125 VOLTS. MOMENTARY CONTACT. NORMALLY CLOSED.		
5/10/45 6696-R MAY 45		CRV:M-439050-1 REV 1	5/10/45 CH:81215D MAY 45		CM:KS-15119 CM:KS-15119-L04 FIG 3SK-1 ISS 1	5/16/45 81084-A MAY 45		CADU:10382-74 REV 0
CAE-24656 AN/SPT-6A SWITCH, TOGGLE SPST, NOMINAL RATING 20 AMPS, 24 VOLTS. MOVEABLE CONTACTS, SILVER INLAY; STATIONARY CONTACTS, SILVER; NON-SHORTING BAKELITE INSULATION, FLUORESCENT TIP ON TOGGLE. TWO SCREW TYPE TERMINALS.			CHH-24663 MK 36 SWITCH, PUSH BUTTON DPST, MOMENTARY CONTACT, CONTACTS RATED 1 AMP 250V, 3 AMPS 125V.			CHU-24671 WEB SWITCH, SENSITIVE SPDT CONTACTS RATED 10 AMPS, AT 125V AC, 5 AMPS, AT 250V AC. OPERATING PRESSURE - UNDER 7 OUNCES. PRESSURE DIFFERENTIAL - 1 TO 3 OUNCES; OVERTRAVEL 1/16". MOVEMENT DIFFERENTIAL 0.0007" OR UNDER. CBM TYPE 746-50-8 5/16/45 BZ-R58 MAY 45		CATALOG SEE ABOVE
5/7/45 8801 K2 MAY 45		CKV:A-62045-1 REV 2	5/11/45 3581 MAY 45		CG:K-7108514-1 REV 0	5/16/45 BZ-R58 MAY 45		CATALOG SEE ABOVE
CAE-24657 AN/SPT-6A SWITCH, TOGGLE SPST, NOMINAL RATING 20 AMPS, 24 VOLTS. MOVEABLE CONTACTS, SILVER INLAY; STATIONARY CONTACTS, SILVER; NON-SHORTING BAKELITE INSULATION, FLUORESCENT TIP ON TOGGLE. TWO SCREW TYPE TERMINALS.			CATK-24664 TS-35A/AP SWITCH SPDT, SNAP ACTION TYPE. CONTACTS RATED 15 AMPS, 115V AC, 0.040" GAP, OPERATING FORCE 16 TO 20 OUNCES. MOVEMENT DIFFERENTIAL 0.010 TO 0.015", 1/32" PRE-TRAVEL, 1/32" OVER-TRAVEL.			CAE-24672 RAL-8 SWITCH, TOGGLE DPST CONTACTS RATED 3 AMPS, AT 250 VOLTS, 15/32" BUSHING. BLACK NICKEL FINISH. BAT OR BALL TYPE HANDLE.		
5/7/45 8822 K1 MAY 45		CKV:A-62045-2 REV 2	5/11/45 4M04-1A MAY 45		CM:BA-10252-27 ISS 2	5/17/45 8360 MAY 45		CMX:C160080G3 REV C
CAE-24658 AN/SPT-6A SWITCH, TOGGLE SPDT, SHORTING 20 AMPS 24 VOLTS. TWO SCREW TYPE TERMINALS. BOTH CIRCUITS OPEN WITH LEVER IN CENTER POSITION. LEVER THROWN IN ONE DIRECTION CLOSSES ONE CIRCUIT, THROWN IN OTHER POSITION CLOSSES SECOND CIRCUIT. LUMINOUS TIP ON TOGGLE.			CAE-24665 TS-35A/AP SWITCH, PUSH BUTTON SPST, NORMALLY OPEN, CONTACTS RATED 0.75 AMP AT 125V, 0.25 AMP AT 250V AC. BUSHING 15/32" LONG.			-24673 RAL-6 SWITCH, PUSH BUTTON SPST NORMALLY OPEN, MOMENTARY CONTACT. NEGLIGIBLE CONTACT RATINGS.		
5/7/45 8800 K2 MAY 45		CKV:A-62052-1 REV 0	5/11/45 8411K4 MAY 45		CM:BA-10248-8 ISS 2	*CRV:K-815770 P1-2-3-4 REV 3, K-815773 P1 REV 5; K-57452 P67 REV 6, CMX:XA160085 REV 0 5/17/45 CRV: JUNE 45 CMX:XA160085		CRV:K-815769C-501, REV 3 *
CATK-24659 AN/ARQ-10 RE 24F 151 SWITCH, SENSITIVE SPST, NORMALLY CLOSED, RATED 10 AMPS, 115V AC; 5 AMPS, 230V AC. PRE-TRAVEL 1/16", OVER-TRAVEL 1/32". MOVEMENT DIFFERENTIAL 0.015". OPERATING PRESSURE 4-5 OZ., RELEASE PRESSURE 2-3 OZ. LEAF TYPE ACTUATOR, SAME AS RC-5L EXCEPT HAS			CHH-24666 WEB SWITCH, TOGGLE DPST, TWO POSITION. CONTACTS RATED 10 AMPS, 125 VOLTS, 5 AMPS, 250 VOLTS, 3/8" BUSHING. BALL TYPE LEVER.			CCT-24674 RAL-6 SWITCH, LEVER 4PDT, 3 POSITION SWITCH. CONSISTS OF 2 BANKS OF SWITCHES - 2SPDT SWITCHES IN UPPER BANK, 2SPDT SWITCHES IN LOWER BANK. CONTACTS RATED 1 AMP, AT 48 VOLTS D.C. OR A.C. MOUNTING PLATE AND ESCUTCHEON ARE NOT INCLUDED WITH THIS		
5/8/45 RC-5L MOD. MAY 45		CFT:NCP-40-1B-99	5/15/45 80976 MAY 45		CBM:746-115A ALT 1	5/17/45 172-A(MOD) JUNE 45		CRV:K-855530 P2 REV 2
SHORTER LEAF.		CATK-24659	CDM-24667 MK 33 SWITCH, MULTIPLE 2PDT WITH NEUTRAL POSITION, NON-LOCKING EACH SIDE OF NEUTRAL. CONTACTS RATED 3 AMP, 110V AC (NON-INDUCTIVE).			CCT-24674 SWITCH.		
			5/15/45 044T3 MAY 45		CG:M-7474555-1 REV 1	CRP-24675 S0-11 PUSH BUTTON STATION SPST, TWO BUTTON, ONE MARKED "STOP", OTHER MARKED "START". WATERPROOF.		
CDM-24660 SR-2 SWITCH, LEVER DPST - SPDT CONSISTS OF 2 SINGLE POLE BREAK PAIR OF CONTACTS AND 1 SPDT SET OF CONTACTS. 3 POSITIONS ALL LOCKING SILVER, NON-WIPING CONTACTS RATED AT 10 AMPS, 110V AC.			CHH-24668 WEB SWITCH, TOGGLE 4PDT THREE POSITION SWITCH WITH A POSITIVE OFF NEUTRAL POSITION. CONTACTS RATED 10 AMPS, 125 VOLTS, 5 AMPS 250 VOLTS. BUSHING LENGTH - 3 1/64".			5/19/45 RX-1649 JUNE 45		M-34T-1 SUB 0
5/10/45 6303 MAY 45		CRV:P-719849-1 SUB 0	5/15/45 80985 MAY 45		CATALOG CBM TYPE 746-161A			

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------

RESTRICTED

NAVSHIPS 900,109

3.24-34

Class 24—Switches

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CHH- 24676 SU.SU-1 SWITCH, TOGGLE DPDT, NO OFF POSITION. CONTACTS RATED 1 AMP. AT 250 VOLTS, 3 AMPS. AT 125 VOLTS. BALL TYPE HANDLE. 7/16" BUSHING.	5/21/45 20905(MOD) JUNE 45	CBM:746-457 ALT 0	CAIU- 24683 MK-22 SWITCH, TOGGLE 4PDT, 2 POSITION. CONTACTS RATED 5 AMPS 250 VOLTS, 10 AMPS, 125 VOLTS. 1/2" BUSHING WITH NO TURN SLOT 1/2" BALL TYPE HANDLE. ØCHH SPECIAL 80950	5/22/45 SW-41 JUNE 45 ØSEE ABOVE	CAIU:AP-1409-1	CM- 24690 AT 50V DC.		
CHH- 24677 SU.SU-1 SWITCH, PUSH BUTTON SPST NORMALLY OPEN. CONTACTS RATED 3 AMPS AT 250 VOLTS, 6 AMPS AT 125 VOLTS. BUSHING LENGTH 9/16". INCLUDES RED SNAP-ON BUTTON.	5/21/45 81105 JUNE 45	CBM:SKETCH	CHH- 24684 RDZ SWITCH, PUSH BUTTON SPST, NORMALLY ON, MOMENTARY CONTACT. CONTACTS RATED 3 AMPS, 250 VOLTS. BUSHING 1/2". TERMINALS EMERGE FROM ENDS. SWITCH TO WITHSTAND 200 HR. SALT SPRAY TEST.	5/23/45 81075CA MAY 45	CNA:H660 P1	CM- 24691 PM SWITCH, LEVER 2 POSITIONS LOCKING, NO THROW IN BACK POSITION. BACK HALF CONSISTS OF 1 DPST SECTION AND 1 SPDT SECTION. CONTACTS RATED 1 AMP NON-INDUCTIVE LOAD 3/4 AMP INDUCTIVE LOAD AT 50V DC.	5/25/45 D-161893-AL MAY 45	BA-100912-9 ISS. 2
CGE- 24678 TDH SERIES SWITCH, LIMIT LEAF TYPE SPST NORMALLY CLOSED. CONTACTS RATED 8 AMPS. AT 28 VOLTS D.C. CONTACTS 1/8" DIA. SILVER.	5/21/45 JUNE 45	COL:2894000 00 REV 0	CATK- 24685 SS SWITCH, HOGGET SPDT, CONTACTS RATED 15 AMPS, 115V. AC. OPERATING PRESSURE 10-15 OZ., MOVEMENT DIFFERENTIAL 0.005-0.009. PRE-TRAVEL 1/32"; OVER-TRAVEL 1/32".	5/23/45 3HD2-1A JUNE 45	CM:BA-10252-23 ISSUE 2	CGC- 24692 SO-S0a SWITCH, LEVER DPDT, THREE POSITION. NON-LOCKING. NEUTRAL POSITION NORMALLY OPEN. CONTACTS RATED 10 AMPS, 125V AC, 2 AMPS, 125V DC.	5/25/45 MCL-28-30-28-30 MAY 45	CRP:U28-5071 P2 REV. 11
CAU- 24679 TDH SERIES SWITCH, LEVER KEY CONSISTS OF 2 BANKS OF SWITCHES, ONE BANK HAVING 3 SPDT AND 1 SPST NORMALLY CLOSED CONTACTS, THE OTHER HAVING 3 SPDT CONTACTS. CONTACTS RATED 3 AMPS, 110 WATTS.	5/21/45 H-77041-3 JUNE 45	COL:3745000 00 REV 0	CHH- 24686 SS SWITCH, TOGGLE DPDT, CONTACTS RATED 3 AMPS AT 250 VOLTS, AND 6 AMPS AT 125 VOLTS, 13/64" LONG MOUNTING SLEEVE; 23/64" SLOTTED TYPE LEVER.	5/23/45 81027-AK JUNE 45	CM:ESA-676800-62 ISSUE 58	CMU- 24693 SF SWITCH, SENSITIVE SPST NORMALLY CLOSED. CONTACTS RATED 10 AMPS, 125V AC, 5 AMPS 250V AC, 3 AMPS, 460V AC, 2 AMPS, 600V AC. OPERATING PRESSURE - UNDER 7 OZS. PRESSURE DIFFERENTIAL - 1 TO 3 OZS. OVERTRAVEL - ØCBM TYPE 746-335	5/25/45 MZ-F3 MAY 45 ØSEE ABOVE	CBM:746-335 ALT 0
CAU- 24680 TDH SERIES SWITCH, LEVER KEY CONSISTS OF 4 CONTACTS NORMALLY CLOSED IN NEUTRAL POSITION. UPPER POSITION CONSISTS OF 2 SPDT (MAKE-BREAK) CONTACTS, ONE ON LEFT AND ONE ON RIGHT LOWER POSITION HAS 2 SPDT (MAKE-BREAK) CONTACTS SIMILARLY. CONTACTS RATED 3 AMPS, 110 WATTS.	5/21/45 H-70224-1 JUNE 4 5	COL:374 1000 00 REV 0	CG- 24687 SP-1M SWITCH, GANG 6PDT (CONSISTS OF 6 SPDT SWITCHETTES EACH WITH ONE NORMALLY OPEN CONTACT AND ONE NORMALLY CLOSED). CONTACTS RATED 10 AMPS AT 12 OR 24V DC, 10 AMPS. AT 115 OR 230V AC.	5/25/45 CR-1070-E105C2 JUNE 45	CG:K-57J995 REV. 2	CMU- 24693 0.005" TO 0.20". MOVEMENT DIFFERENTIAL - 0.0007" MAX.		
CAU- 24680 110 WATTS.			CHH- 24688 SR-2 SWITCH, ROTARY ASSEMBLY: SPDT. RATED 3 AMPS 250 VOLTS, FLAT ON SHAFT TO BE 28° WHEN IN EXTREME CLOCKWISE POSITION.	5/16/45 K-63868 MAY 45	CRV:K-887347-2 SUB 3	CMU- 24694 SF SWITCH, SENSITIVE SPST NORMALLY CLOSED CONTACTS RATED 15 AMPS, 125V AC, 7.5 AMPS 250V AC, 3 AMPS, 460V AC, 2 AMPS, 600V AC. OPERATING PRESSURE - 5 TO 12 OZS. PRESSURE DIFFERENTIAL - 20 TO 70 % OPERATING PRESSURE. *ØCBM:746-335 ALT 0 (FOR DIMENSIONS ONLY)	5/25/45 MZR CBM TYPE MAY 45 746-353	*SEE ABOVE
CATK- 24681 TDH SERIES SWITCH, SENSITIVE SPST NORMALLY OPEN. CONTACTS RATED 3 AMPS. 450V AC, 5 AMPS, 250V AC, 10 AMPS, 115V AC, 1000 WATTS. OPERATING PRESSURE 2 OZS. OR LESS. MOVEMENT DIFFERENTIAL 0.003" TO WITHSTAND 200 HR. SALT SPRAY TEST.	5/21/45 X-CODE D121 JUNE 45	COL:260 0002 00 REV 0	CRY- 24689 YR SWITCH, LEVER: CONTACT ASSEMBLY: POSITION 1-BREAK, 3 MAKE 2; POSITION 2-BREAK 2, MAKE 2. BOTH POSITIONS NON-LOCKING. CONTACTS RATED 3 AMPS, 500V DC BREAKDOWN TEST. NICKEL SILVER CONTACT SPRINGS.	5/21/45 MAY 45		CMU- 24694 OVERTRAVEL 0.003 TO 0.007. MOVEMENT DIFFERENTIAL - 0.0015 TO 0.003. SPECIAL ACTUATING PIN.		
CHH- 24682 MK-22 SWITCH, PUSH BUTTON DPST, MOMENTARY CONTACT, NORMALLY OPEN. CONTACTS RATED 3 AMPS. AT 250 VOLTS, 6 AMPS AT 125 VOLTS, 9/16" BUSHING.	5/22/45 81084-BA JUNE 45	CM:ESA-676800-5 ISSUE 41	CM- 24690 PM SWITCH, LEVER: 2 SECTIONS, LOCKING, NO THROW IN BACK POSITION. BOTH HALVES OPERATE SIMULTANEOUSLY. BACK HALF CONSISTS OF 2 DPDT SECTIONS, FRONT HALF CONSISTS OF 1 DPDT SECTION CONTACTS RATED 1 AMP, NON-INDUCTIVE LOAD, 3/4 AMP INDUCTIVE LOAD	5/25/45 D-161893AE MAY 45	BA-100912-8 ISS 2	CMU- 24695 GEN. USE SWITCH, LEVER DPDT FOR COAX CIRCUIT. TWO POSITION, TWO COMMON TERMINALS CONNECT WITH TWO TERMINALS IN POSITION, AND WITH TWO DIFFERENT TERMINALS IN OTHER POSITION. HAS BRITISH PTE TYPE FITTINGS.	5/26/45 3557-43 MAY 45	NRL:RA 24F202

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------

Class 24—Switches

3.24-35

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CAE-24696 QBF, QJA SWITCH, TOGGLE: 3 PDT, CONTACTS RATED 75 AMPS, 15V DC, AND 22 AMPS, 125V AC. BAT TYPE LEVER WITH RADIO-ACTIVE TIP. FLUSH MOUNTED.	5/26/45 MAY 45	8745K6 CW:BA-10177-9 ISS. 7	CGT-24704 SO-7M7N SWITCH, PUSH BUTTON 1 CONTACT NORMALLY OPEN, 1 CONTACT NOR- MALLY CLOSED. CONTACTS RATED 10 AMPS. AT 600V AC. TWO BUTTONS - RED FOR "STOP", BLACK FOR "START".	5/25/45 MAY 45	2251-S CRP:U28-5101 P2 REV. C	CW-24710 QBF, QJA CONTACT SPRING ASSEMBLY SPST, NORMALLY OPEN. CONTACTS RATED 1/2 AMP. AT 56V DC. CONSISTS OF A CONTACT SPRING PILE-UP MOUNTED ON A STEEL DISC TYPE BRACKET. SAME AS -24709 EXCEPT DOES NOT INCLUDE STEEL POST.	5/29/45 MAY 45	ESX-642526-AL ISS. 7
CAE-24697 QBF, QJA SWITCH, TOGGLE 4PST, CONTACTS RATED 50 AMPS, 15V DC, AND 20 AMPS, 125V AC. BAT TYPE LEVER WITH RADIO-ACTIVE TIP. FLUSH MOUNTED.	5/26/45 MAY 45	8883K2 CW:BA-10177-10 ISS. 7	CGT-24705 SO-7M7N SWITCH, PUSH BUTTON 2 CONTACTS, BOTH NORMALLY OPEN. CONTACTS RATED 10 AMPS. AT 600 VOLTS AC. TWO BUTTONS - RED FOR "STOP", BLACK FOR "START".	5/25/45 MAY 45	2251-S CRP:U28-5101 P3 REV. C	CW-24711 QBF, QJA CONTACT SPRING ASSEMBLY CONSISTS OF 6 PILE-UPS, EACH HAVING 2 SPST NORMALLY OPEN CONTACT ASSEMBLIES. CONTACTS RATED 1/2 AMP AT 56V DC. CON- TACT SPRING PILE-UPS ARE MOUNTED ON A "U" SHAPE STEEL BRACKET.	5/29/45 MAY 45	ESX-642526-AM ISS. 7
CAE-24698 QBF, QJA SWITCH TOGGLE 3PST, CONTACTS RATED 75 AMPS, 15V DC, AND 22 AMPS, 125V AC. BAT TYPE LEVER WITH RADIO-ACTIVE TIP. FLUSH MOUNTED.	5/26/45 MAY 45	8740K6 CW:BA-10177-11 ISSUE 7	CFT-24706 TDN-2 SWITCH, LEVER 4PDT, CONTACTS RATED 1 AMP AT 8500 VOLTS PEAK. NO PROVISION FOR FUSING.	5/28/45 MAY 45	F-21135-12J-3 F-21135-12J-3	CW-24712 QBF, QJA CONTACT SPRING ASSEMBLY SPST, NORMALLY OPEN. CONTACTS RATED 1/2 AMP. AT 56V DC. CONSISTS OF A CONTACT SPRING PILE-UP MOUNTED ON A STEEL DISC TYPE BRACKET. SIMILAR TO 24709 EXCEPT DISC ASSEMBLY HAS BEEN MODIFIED.	5/29/45 MAY 45	ESX-642526-AK ISS. 7
CSZ-24699 TDN-2 SWITCH, LEVER 3PDT, CONTACTS RATED 50 AMPS, 250 VOLTS.	5/28/45 MAY 45	82352 82342, 82352	CUM-24707 BDI SWITCH, SENSITIVE SPST NORMALLY OPEN. CONTACTS RATED 5 AMPS, 125V AC. OPERATING PRESSURE - 6 TO 14 OZS. PRESSURE DIFFERENTIAL - 20 TO 70% OF OPERATING PRESSURE. OVERTRAVEL - 0.003 TO 0.007. MOVEMENT DIFFERENTIAL - 0.006". LEAF SPRING ACTUATOR ALLOWS 5/28/45 MAY 45	5/28/45 MAY 45	NCL: "L" TYPE CUM: CATALOG PAGE 5	CW-24713 QBF, QJA CONTACT SPRING ASSEMBLY SPST, NORMALLY OPEN. CONTACTS RATED 1/2 AMP. AT 56V DC. CONSISTS OF A CONTACT SPRING PILE-UP MOUNTED ON A STEEL BRAC- KET. SAME AS -24709 EXCEPT FOR MOUNTING BRACKET.	5/29/45 MAY 45	ESX-642526-AP ISS. 7
CSZ-24700 TDN-2 SWITCH, LEVER DPDT, CONTACTS RATED 30 AMPS, 230 VOLTS.	5/28/45 JUN. 45	98251-C 98251-C	CUM-24707 SWITCH TO OPERATE AT PRESSURE AS LOW AS 2 OZ.			CW-24714 QBF, QJA CONTACT SPRING ASSEMBLY SPST, NORMALLY OPEN. CONTACTS RATED 1/2 AMP. AT 56V DC. CONSISTS OF A CONTACT SPRING PILE-UP MOUNTED ON A STEEL "L" SHAPE BRACKET. SAME AS -24709 EXCEPT FOR MOUNTING BRACKET.	5/29/45 MAY 45	ESX-642527-AS ISS. 7
CSZ-24701 TDN-2 SWITCH, LEVER 3PST, CONTACTS RATED 100 AMPS, 230 VOLTS.	5/28/45 MAY 45	88353 88353	CRV-24708 JT SWITCH BOX INCLUDES A 5 POLE, 3 POSITION ROTARY SWITCH FOR SWITCHING FROM NORMAL TO EITHER GENERATED TARGET TRACKING (GTT) OR MAINTENANCE OF TRUE BEARING (MTB). WELDED SHEET STEEL, DRIPPROOF ENCLOSURE DESIGNED FOR EITHER BULKHEAD OR OVERHEAD 5/29/45 MAY 45	5/29/45 MAY 45	CS-88	CW-24715 QBF, QJA CONTACT SPRING ASSEMBLY CONSISTS OF 2 SETS OF SPST NORMALLY OPEN CONTACT SPRING PILE-UPS MOUNTED ON A STEEL DISC TYPE BRACKET. CONTACTS RATED 1/2 AMP AT 56V DC.	5/29/45 MAY 45	ESX-649331-EL ISS. 6
CFT-24702 TDN-2 SWITCH, LEVER 4PDT, CONTACTS RATED 1 AMP AT 8500 VOLTS PEAK. PROVIDED WITH MOUNTINGS FOR 2 HIGH VOLTAGE FUSES.	5/28/45 MAY 45	F-21135-12J-1 F-21135-12J-1	MOUNTING.			CHH-24716 WCA SWITCH, TOGGLE: DPST CONTACTS RATED 15 AMPS, 125 VOLTS, 10 AMPS, 250 VOLTS. BALL TYPE HANDLE. BUSHING LENGTH 15/32".	5/30/45 JUN. 45	80302 CBM-746-160 CHH, CAT. PG 18
CFT-24703 TDN-2 SWITCH, LEVER 4PDT, CONTACTS RATED 1 AMP AT 8500 VOLTS PEAK. PROVIDED WITH MOUNTINGS FOR ONE HIGH VOLTAGE FUSE.	5/28/45 MAY 45	F-21135-12J-2 F-21135-12J-2	CW-24709 QBF, QJA CONTACT SPRING ASSEMBLY SPST, NORMALLY OPEN. CONTACTS RATED 1/2 AMP. AT 56V DC. CONSISTS OF A CONTACT SPRING PILE-UP MOUNTED ON A STEEL DISC TYPE BRACKET. INCLUDES 2 AJ STEEL POST.	5/29/45 MAY 45	ESX-642525-AE ISS. 8	CAE-24717 QCR-1 SWITCH, PUSH BUTTON: SPST NORMALLY CLOSED. CONTACTS RATED 10 AMPS. AT 125 VOLTS AC CONTINUOUS. RED BUTTON OR BLACK BUTTON.	*CAE: 486-322 5/30/45 JUN. 45	631-118 CBM-746-244 *SEE ABOVE

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
5/28/45	F-21135-12J-2	F-21135-12J-2		5/29/45	ESX-642525-AE	ISS. 8		5/30/45	631-118	CBM-746-244

RESTRICTED

NAVSHIPS 900,109

3.24-36

Class 24—Switches

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
-----------------------	--------------------	-------------------------------	-----------------------	--------------------	-------------------------------	-----------------------	--------------------	-------------------------------

CHH- 24718 MFA
 SWITCH, PUSH BUTTON:
 SPST NORMALLY OPEN CONTACTS RATED 6 AMPS
 AT 125V AC. 1/2" BUSHING. SIMILAR TO
 -24492 EXCEPT FOR TYPE OF BUTTON.

5/31/45 81084 CBM-746-533
 JUN. 45 ALT 0

CVH- 24719 MFA
 SWITCH, SENSITIVE:
 SPST NORMALLY OPEN. CONTACTS RATED 25
 AMPS. AT 28V DC 17 AMPS 125V AC. OPERAT-
 ING PRESSURE 6 TO 16 OZS.; PRESSURE
 DIFFERENTIAL -20 TO 70% OF OPERATING
 PRESSURE; OVERTRAVEL 3/16" TO 7/32"
 MOVEMENT. DIFFERENTIAL .001" TO .003"
 5/31/45 HZGPNF
 JUN. 45 CBM-746-579

CVH- 24719
 NEOPRENE SEALED SPRING PLUNGER.

CAY- 24720 TBL-10
 SWITCH PUSH BUTTON:
 SPST MOMENTARY CONTACT. CONTACTS RATED
 1 AMP AT 250V DC.

*CAY:1-A-466
 5/31/45 S2514868 CAY:724533
 JUN. 45 REV 13 *

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------