

INSTRUCTIONS FOR INSTALLING THE MANUAL AND
POWER DRIVE BACKSPACE, AND BACKSPACE COVER
MODIFICATION KITS ON MODEL 28 OR MODEL 35 PER-
FORATOR OR REPERFORATOR (LPR, LPE, LRPE, LTPE,
LARP)

NOTE

This specification covers the following modification kits: 159363, 159364, 160881, 161304, 161828, 162245, 170196, 172640, 178697, 178698, 178917, 178918. See Paragraph 1. and chart (Figure 6) for application and usage.

1. GENERAL

a. The 159363 (for units equipped for chadless tape), 178917 (for typing reperforator units equipped for fully perforated tape and print between feed holes), 170196, 172640, 178697, or 178698 (for units equipped for fully perforated tape and do not print between feed holes) modification kit, when installed on a Model 28 or Model 35 Perforator or Reperforator, provides a manual backspace mechanism for replacing an erroneous punched character with the letters code. Depressing the backspace bell crank post nut on the perforator allows the tape to backspace. The 170196 or 178697 modification kit also provides the power drive described below.

b. The 159364, 161304, or 162245 modification kit, when installed on a Model 28 or Model 35 Perforator or Reperforator, provides a power drive (from the Model 28 or Model 35 punch main shaft) for the 159363, 172640, or 178917 manual backspace mechanism. The start magnet operates on 115 volts, 60 cycles ac, 110 volts dc (with a 600 ohm series resistance) and 48 volts dc. Facilities for mounting the dc series resistors are not provided. Additional parts and wiring information needed to control the power backspace are supplied by the customer. The 162245 modification kit includes a cable for use with typing reperforators having a 36-point connector.

c. The 160881 or 178918 modification kit, when installed on a Model 28 and Model 35 Perforator or Reperforator, respectively, provides a cover for the backspace mechanism. This prevents accidental insertion of objects or fingers.

d. The 161828 modification kit, when installed on a Model 28 or Model 35 Reperforator, allows the power tape backspace (159363 and 159364 modification kits) to operate when noninterfering blank tape feed-out (159351 modification kit, Specification 5772S) is present on the same unit.

*General Revision

© 1958 by Teletype Corporation.
All rights reserved.

Printed in U. S. A.

e. The modification kits consist of:

			159363	159364	161304	162245	170196	172640	178697	178698
	2191	Lockwasher		4	4	4	5		5	
1	3598	Nut		X	X	X	X		X	
1	7002	Washer, Flat		X	X	X	X		X	
	8330	Washer, Flat		1	1	1	2		2	
1	84575	Spring		X	X	X				
1	122149	Screw	X					X		X
2	125011	Washer, Flat	X							X
1	151626	Lug, Terminal				X				X
2	151630	Screw		X	X	X	X		X	
1	151631	Screw					X		X	
1	151721	Screw		X	X	X	X		X	
	153817	Screw	3				1	1	1	1
2	155750	Sleeve, Insulating				X				
1	159916	Post, Eccentric	X					X		X
1	159963	Hub		X			X		X	
1	159983	Eccentric Assembly		X	X	X			X	
1	159984	Link Assembly		X	X	X	X		X	
1	159985	Bell Crank Assembly	X							X
1	159986	Rake Assembly	X							
1	159987	Bracket, Guide	X				X	X	X	X
1	160672	Stud					X		X	
1	161493	Post					X		X	
1	162207	Cable Assembly				X			X	
1	164518	Bell Crank Assembly					X	X	X	
1	170192	Eccentric Assembly					X			
1	170193	Bracket, Guard					X		X	
1	193825	Magnet Assembly		X	X	X	X		X	

NOTE

The 170192 eccentric assembly is the same as the 159983 eccentric assembly except that 170200 arm is substituted for 159961 arm (see Figure 2).

f. The 160881 modification kit consists of:

1	2191	Lockwasher	1	160673	Shaft, Feed Wheel
1	8330	Washer, Flat	1	160674	Nut
1	160666	Guard	1	161493	Post
1	160672	Stud			

g. The 161828 modification kit consists of:

1	151631	Screw	1	161930	Lever w/Hub
1	161928	Post			

h. The 178917 modification kit consists of:

1	2191	Lockwasher	1	178921	Plate w/Post
1	49420	Spring	1	178923	Crank Assembly
1	111017	Screw	1	178924	Shaft
1	119651	Ring, Retaining	1	178925	Ratchet
1	125011	Washer, Flat	1	178926	Screw
1	153817	Screw	1	178927	Clamp

i. The 178918 modification kit consists of:

1	178930	Guard	1	178932	Post
1	178931	Post			

j. For part numbers referred to and for parts ordering information, refer to Bulletin 1166B (LARP), 1167B (LPR), 1169B (LPE, LTPE), or 1187B (LRPE).

2. INSTALLATION

a. 159363, 172640 or 178698 modification kit (Figure 1)

(1) Remove the four (for the 159363 modification kit) or front two (for the 170196 or 172640 modification kit) 152893 screws and 110743 lockwashers that secure the punch block to the perforator. Discard the screws and retain the lockwashers.

(2) Mount the 159985 bell crank assembly and the 159987 guide bracket using the 122149 screw, 110743 lockwasher, and 159916 eccentric in the lower mounting hole of the assembly. Install a 153817 screw and 110743 lockwasher in the upper mounting hole.

(3) For the 159363 modification kit, mount the 159986 rake assembly using two 153817 screws, 110743 lockwashers and 125011 flat washers.

b. 159364, 161304 or 162245 modification kit (Figure 2)

(1) Adjust the magnet assembly. See Paragraph 3.

(2) Install the 193825 magnet assembly inside the punch frames (with the magnet yoke toward the punch side of the punch assembly) using two 151630 screws, 2191 lockwashers, and one 7002 flat washer (used at lower mounting hole).

(3) Remove and discard the 3598 nut (located on the front plate) which mounts one side of the slide lever guide post and replace with the 159984 link assembly. Make certain that the backspace post is engaged with its operating link.

(4) Remove the 3598 nut (discard) 2191 lockwasher (retain), and 150040 screw (discard) from the clutch drum if the unit has a selector (if a selector clutch drum is not used mount the 159963 hub furnished). Install the 159963 hub using the 151721 screw and 2191 lockwasher. Start a 3598 nut, 2191 lockwasher (retained), and 8330 flat washer on the 151721 screw. Slip the 159983 or 170192 eccentric assembly (with the retaining ring out) over the clutch drum hub and under the 8330 flat washer. Make certain that the drive link fork is riding on its guide post and is under the drive link latch (high part of eccentric should be to the right). Tighten the 3598 nut.

(5) Attach the 84575 spring on the drive link latch and its spring post.

(6) For the 162245 modification kit, secure the 162207 cable assembly to the magnet assembly by means of the terminal lugs on the cable and the screws on the magnet. Slip the two 155750 insulating sleeves over the other end of the 162207 cable assembly. Solder the cable ends to terminal numbers 27 and 28 of the 36-point connector. Slide insulating sleeves over soldered connections. Assemble the 151626 terminal lug to the 8-1/2 inch long red lead of the 162207 cable assembly when a magnet having screw terminals is used.

c. 160881 modification kit (Figure 4)

(1) Remove and discard the top left 153817 screw, the 156045 feed wheel knob, the 159914 nut, and remove and retain the 151630 screw. Retain the lockwashers.

(2) Install in place of the 153817 screw the 160672 stud, in place of the 151630 screw the 161493 post and 2191 lockwasher, in place of the 156045 knob the 160673 shaft, in place of the 159914 nut the 160674 nut. Secure the 160673 feed wheel shaft in its place and secure the 160674 nut in position with the high side of the eccentric up. Tighten all loose parts.

(3) Place the 160666 guard over the top portion of the backspace mechanism, sliding the guard onto the grooved portion of the 160672 stud until the hole lines up with the 161493 post. Secure with the 151630 screw, 2191 lockwasher, and 8330 flat washer.

d. 161828 modification kit

(1) Remove and discard the 151722 screw and 2191 lockwasher from the punch assembly.

(2) Replace the 156740 screw on the power drive backspace drive arm with the 151631 screw.

(3) Install the 161928 post and 161930 lever (in place of the 151722 screw and 2191 lockwasher removed in Paragraph (1) so that the lever engages the drive arm screw on the backspace mechanism and the feed pawl on the noninterfering blank feed-out mechanism.

e. 178917 modification kit (Figure 3)

(1) Remove two front 152893 screws and 110743 lockwashers that secure the punch block to the perforator. Discard the screws and retain the lockwashers.

(2) Mount the 178921 plate, in upper hole using the 153817 screw and 110743 lockwasher. In lower hole use 153817 screw, 125011 flat washer, and 110743 lockwasher.

(3) Mount 178923 crank assembly to stud of 178921 plate and insert 119651 retaining ring. Hook 49420 spring between crank and spring ear of 178921 plate.

(4) Complete the installation by removing and discarding, 160673 shaft and 160948 screw, retain 93117 lockwasher. Insert 178924 backspace shaft and at far end insert 178926 screw and 93117 lockwasher. In front end of shaft slide on 178925 ratchet, place 178927 adjusting clamp over shoulder of ratchet, and fasten with 110017 screw and 2191 lockwasher.

f. 178918 modification kit (Figure 3)

(1) Remove the upper 153917 screw and 110743 lockwasher which mounts 178921 plate w/post; discard the screw and retain the lockwasher. Install the 178931 post and 110743 lockwasher.

(2) Remove 151630 screw and 2191 lockwasher from right uppermost hole in front plate. Retain both screw and lockwasher. Install the 178932 post and 2191 lockwasher.

(3) Slide 178930 guard in place and securely tighten with 151630 screw.

g. 170196 or 178697 modification kit

(1) Follow procedure in Paragraph 2. a. (1).

(2) Mount the 164518 bell crank assembly and the 159987 guide bracket using the 160672 stud and retained 110743 lockwasher in the upper hole and the 153817 screw and retained 110743 lockwasher in the lower hole.

(3) Follow procedure in Paragraphs 2. b. (1) through (5).

(4) Remove the 151630 screw from the 156040 post and assemble the 161493 stud using the retained 2191 lockwasher. Mount the 170193 guard bracket in the slot in the 160672 stud and fasten using a 8330 flat washer, 2191 lockwasher, and 151631 screw.

3. ADJUSTMENTS AND LUBRICATION

a. For adjustment and lubrication procedures refer to appropriate Bulletin(s) as follows (Bell System refer to standardized information):

(1) LPR - Bulletin 247B

(2) LPE & LTPE - Bulletin 250B

(3) LRPE - Bulletin 256B

(4) LARP - Bulletin 294B and applicable information in Bulletin 250B (178697 kit) or 247B (178698 kit)

b. Make the applicable manual and power drive backspace mechanism adjustments shown in Figure 5.

c. Pertains only to power drive backspace mechanism - For dc operation, the backspace magnet armature should be positioned so that the side marked "C" faces the pole side of the magnet core. For ac operation, the unmarked side of the magnet core should face the pole side of the magnet core.

* * *

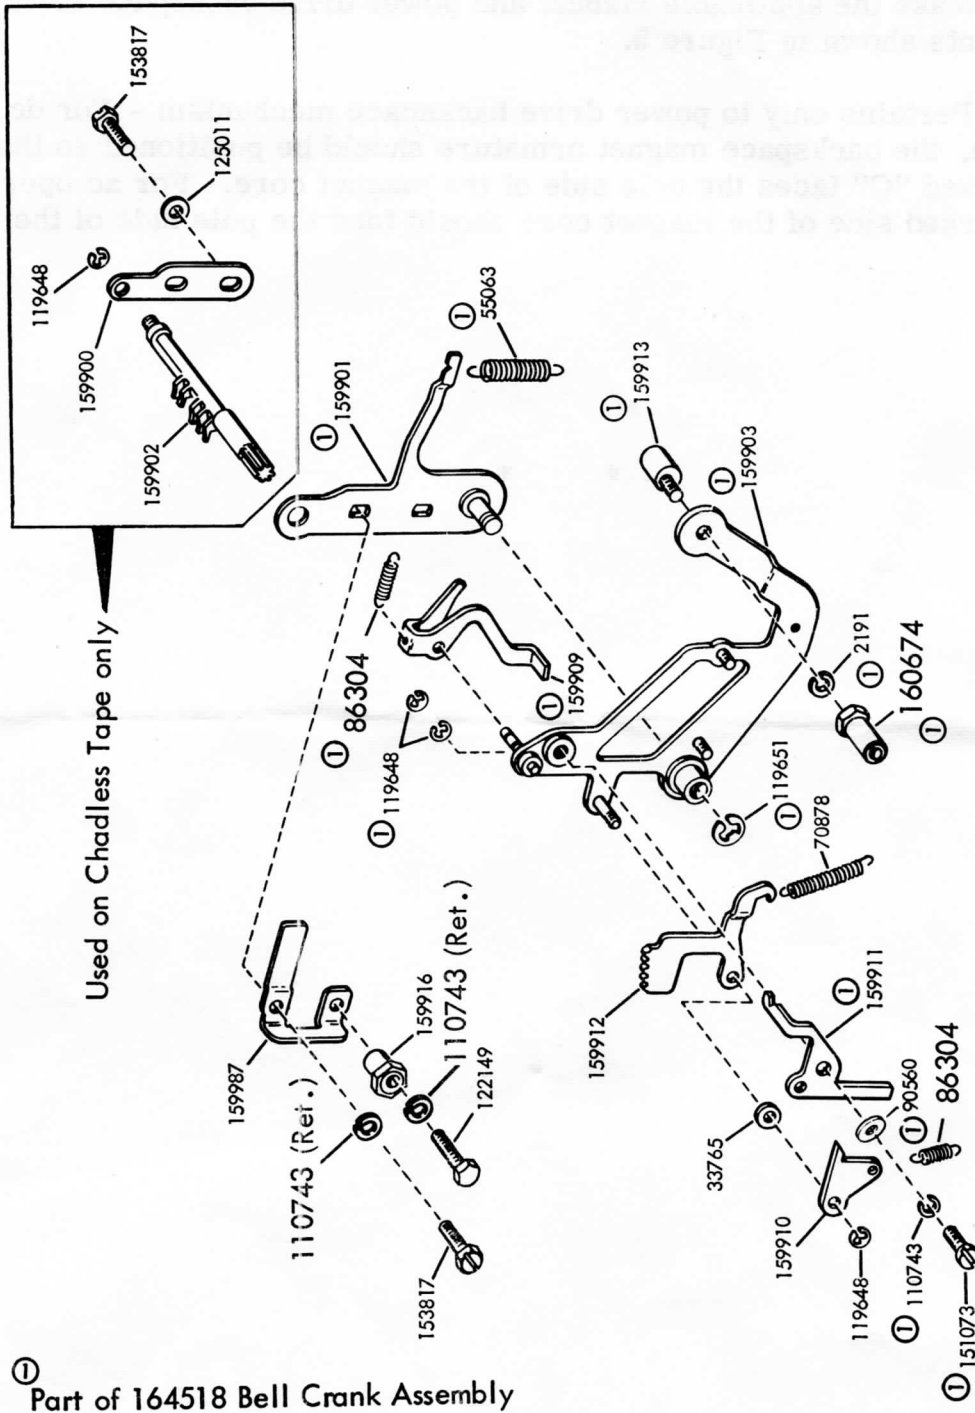


FIGURE 1 - PARTS TO ADD MANUAL BACKSPACE



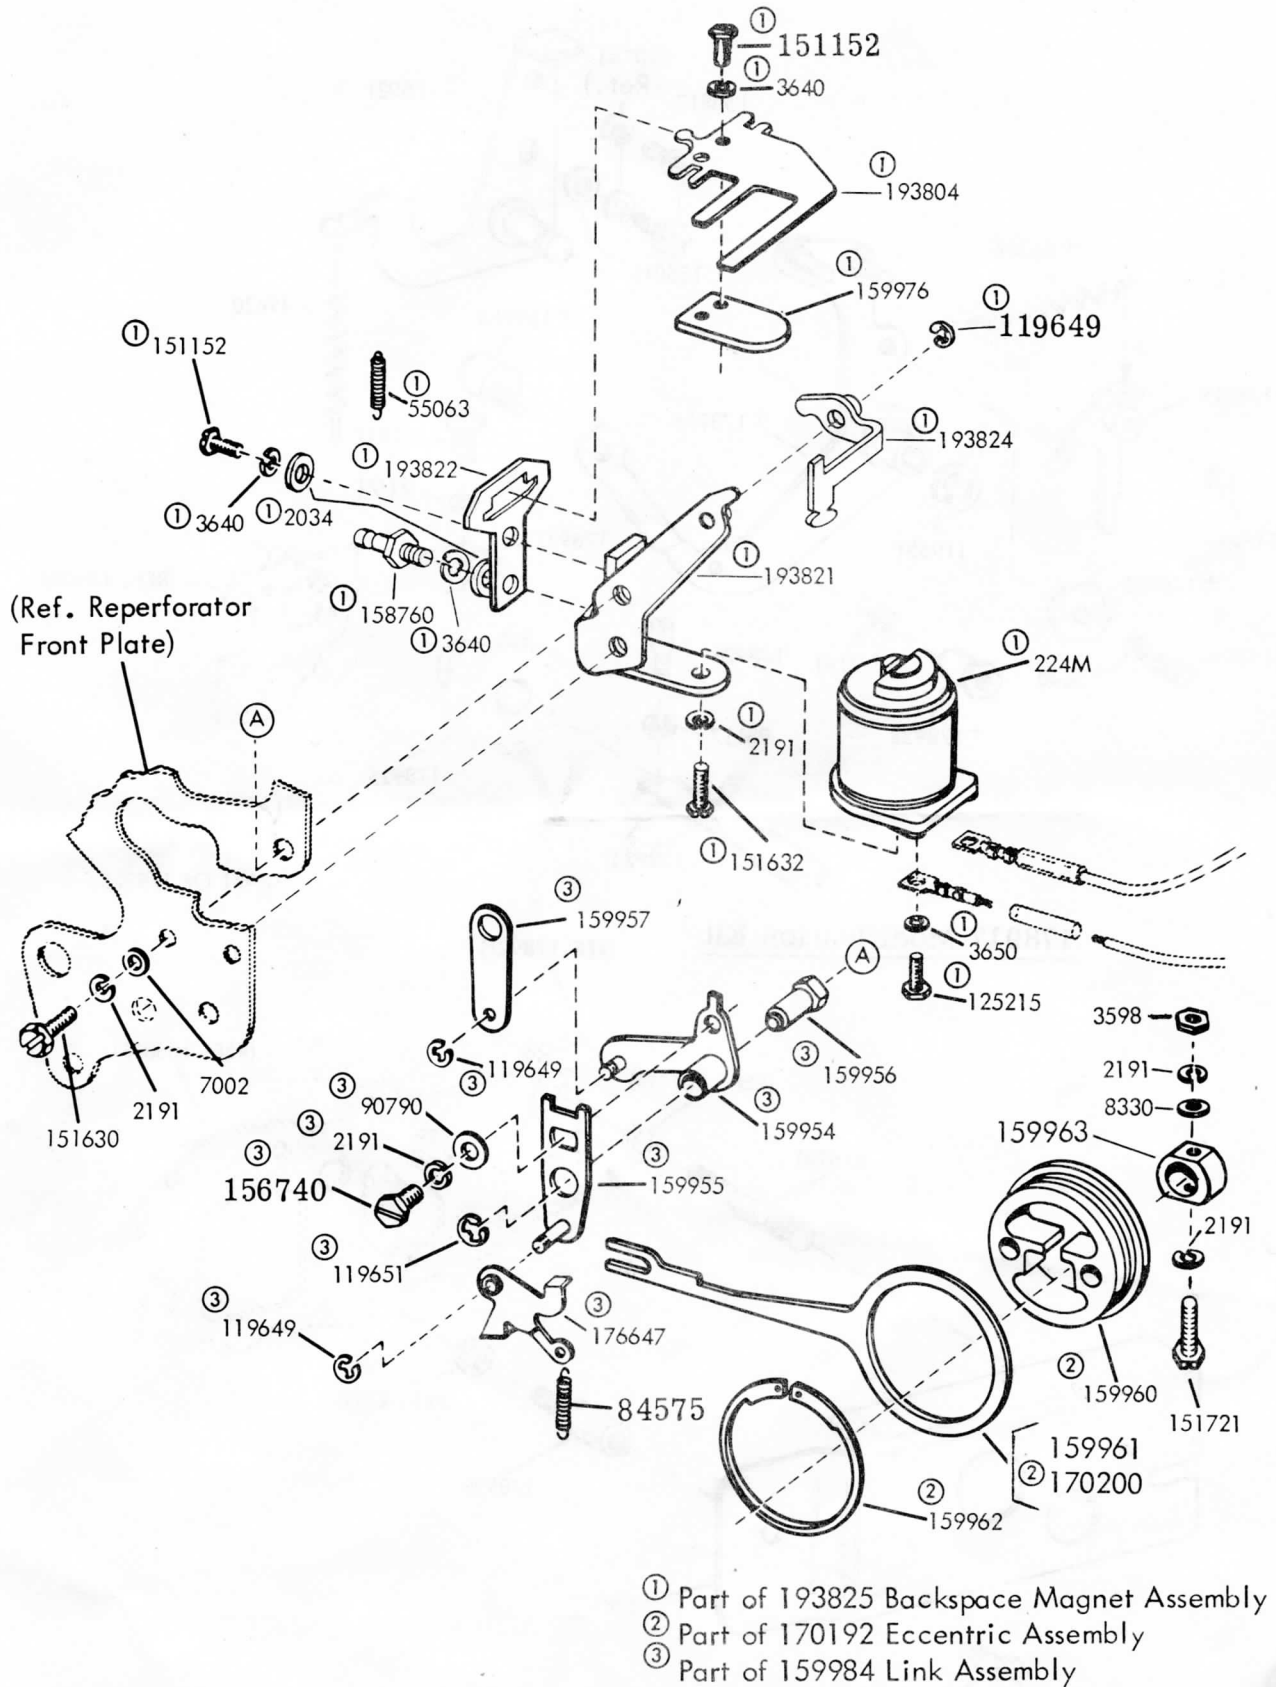


FIGURE 2 - PARTS TO ADD POWER DRIVE TO BACKSPACE

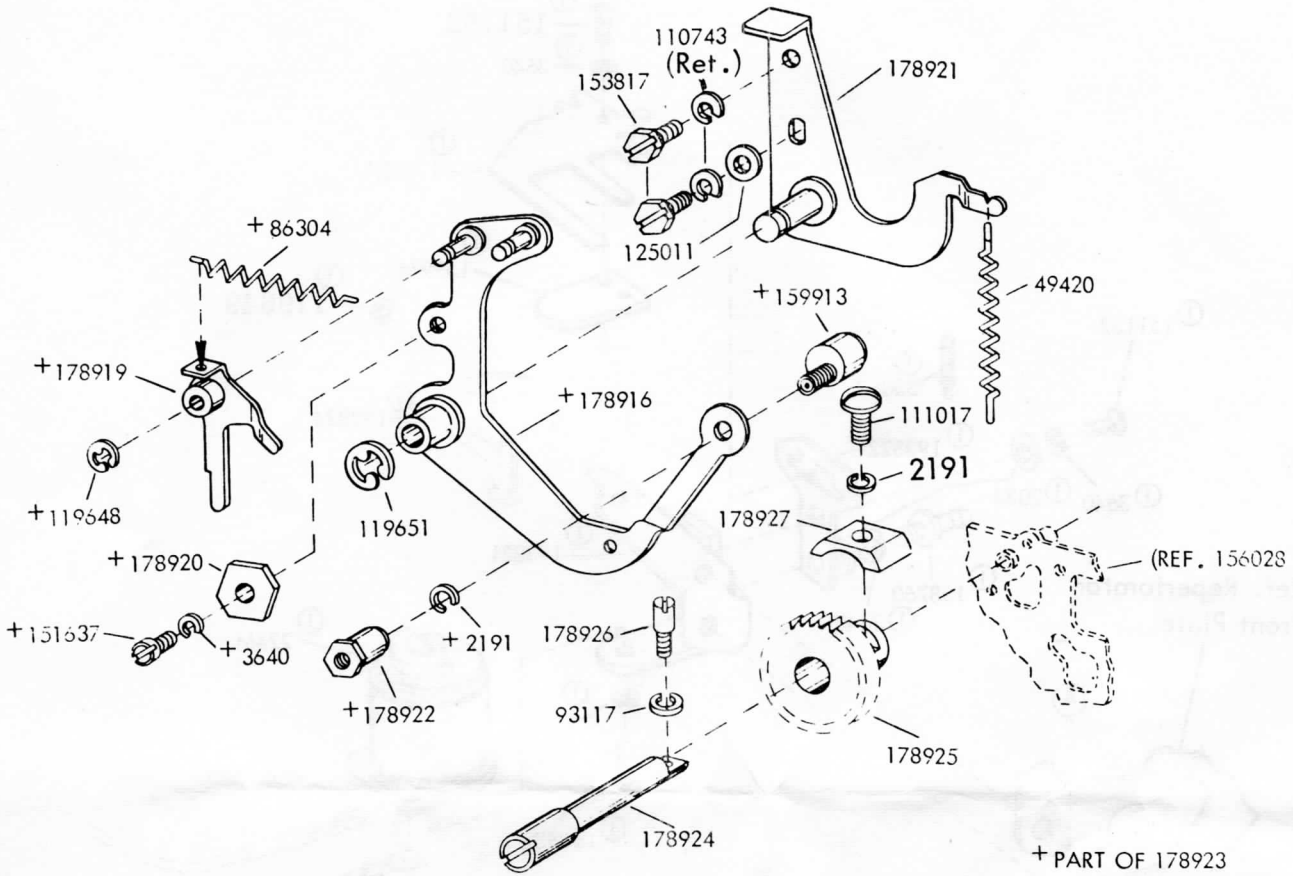


178917 Modification Kit

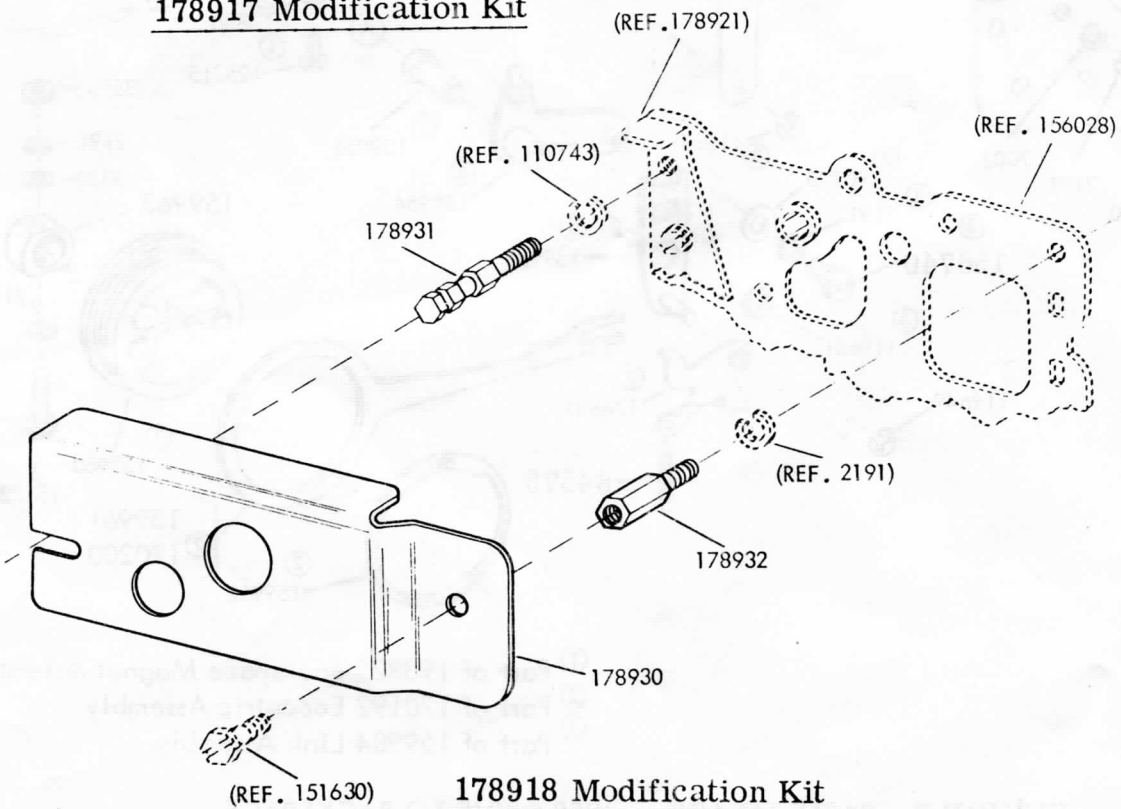


178918 Modification Kit

FIGURE 3

5534S

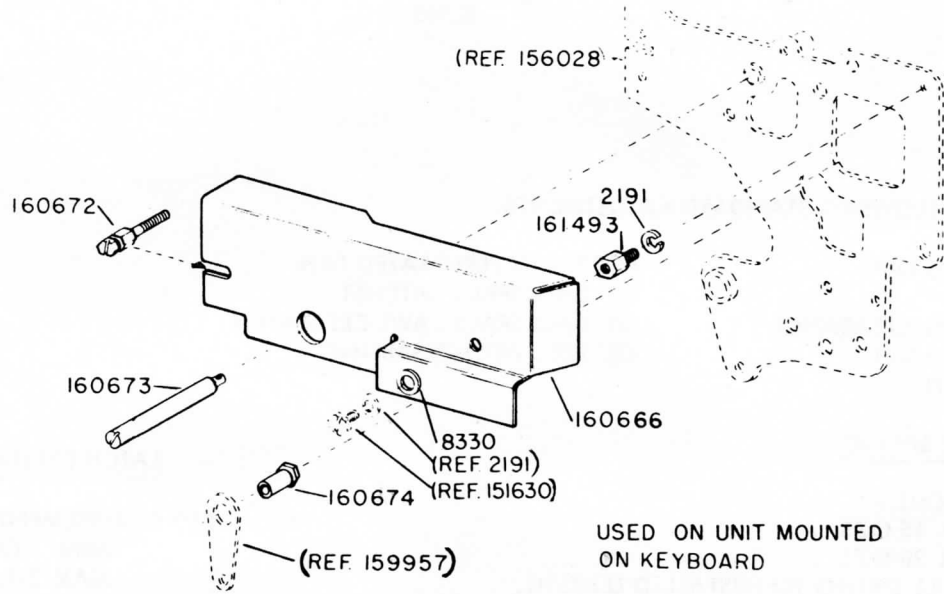

160881 MODIFICATION KIT TO ADD GUARD TO
COVER BACKSPACE MECHANISM

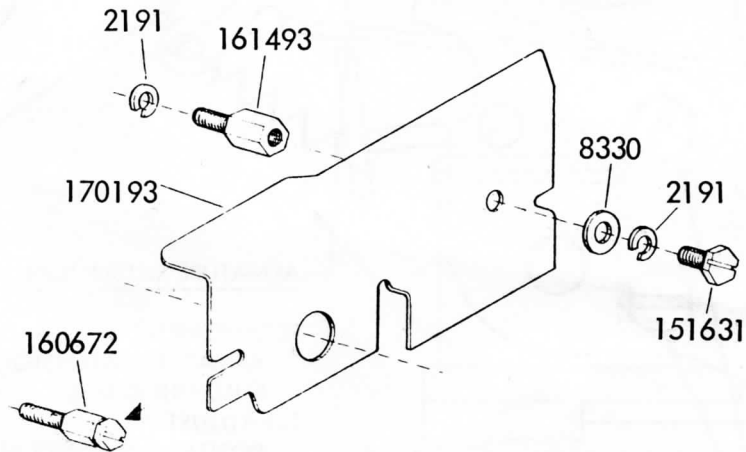

GUARD TO COVER BACKSPACE MECHANISM ON NONTYPING PERFORATOR

FIGURE 4

MAKE THE FOLLOWING STANDARD ADJUSTMENTS.

FOR CHADLESS TAPE

- (1) RAKE
- (2) FEED PAWL CLEARANCE
- (3) RETURN LATCH
- (4) FEED PAWL

FOR FULLY PERFORATED TAPE

- (1) BACKSPACE RATCHET
- (2) BACKSPACE PAWL CLEARANCE
- (3) FEED PAWL DISABLING

ARMATURE SPRING


REQUIREMENT

MIN 15 OZS
MAX 20 OZS
TO PULL SPRING TO INSTALLED LENGTH.

LATCH EXTENSION SPRING

REQUIREMENT

MIN 1 OZ
MAX 2-1/4 OZS
TO START LATCH MOVING

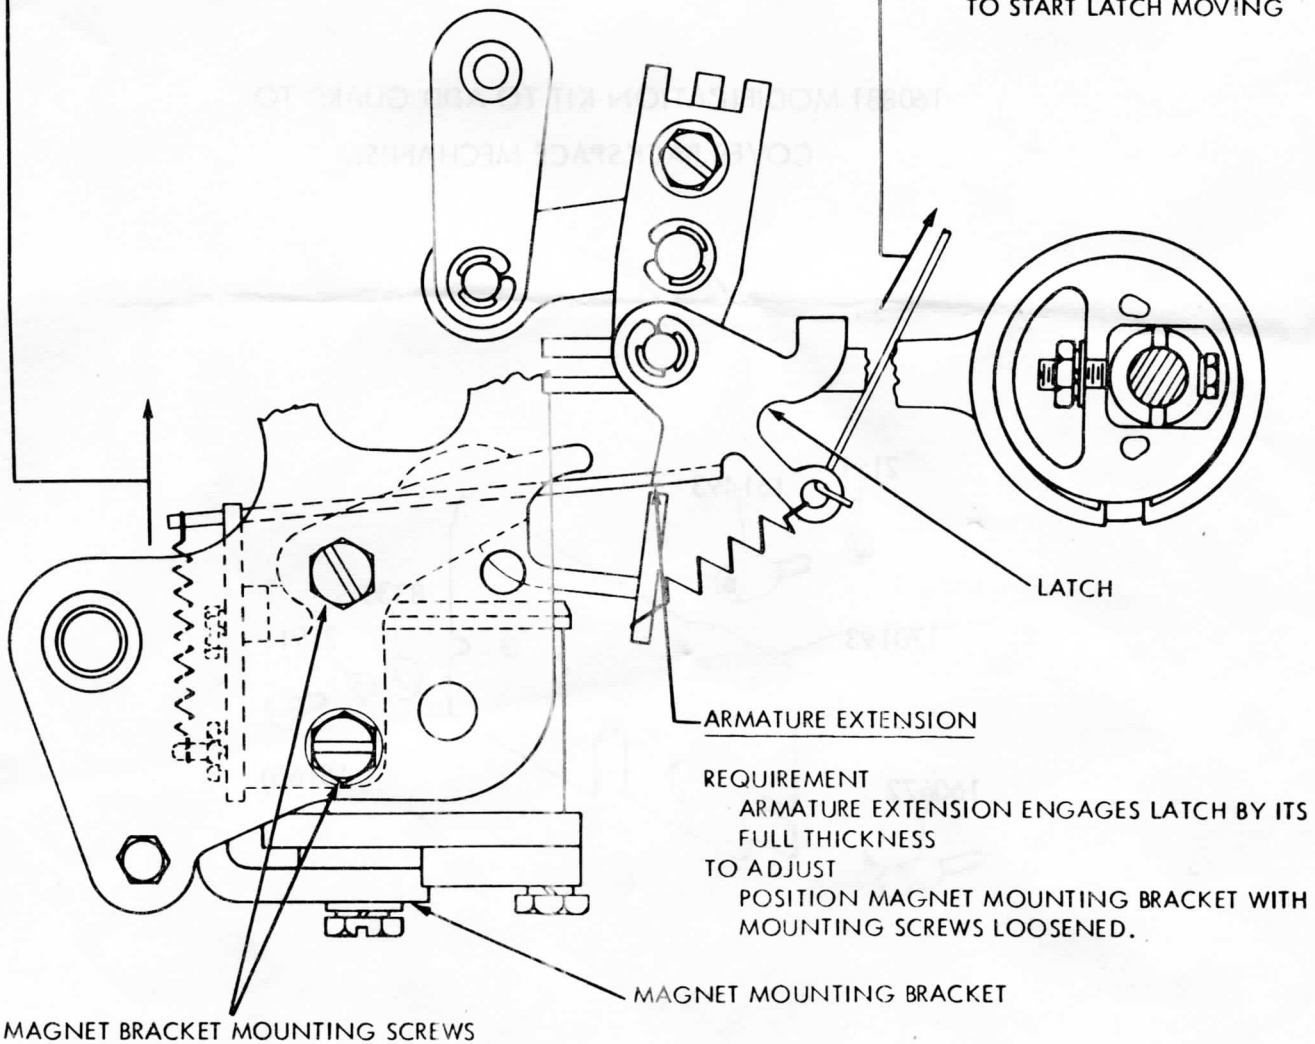

FINAL POWER OR MANUAL (FOR CHADLESS TAPE)
SAME AS STANDARD ADJUSTMENT

FIGURE 5 - MANUAL AND POWER DRIVE BACKSPACE MECHANISM
FOR CHADLESS OR FULLY PERFORATED TAPE

MOD. KIT	To Provide Manual & Power Backspace	To Provide Manual Backspace	To Add Power to Backspace	To Provide Cover for Backspace Mech.	To Make Power Backspace & Blank Feed-Out Compatible	LPR - Chadless	LPR - Chadless (with 36-Pt. Conn.)	LPR or LRPE - Fully Perf. (with Base wired for Backspace Mag.)	LPE	LRPE	LTPE	LARP (Miniaturized)	Remarks
159363		X				X			X	X	X	X	Chadless tape
159364			X						X		X		Unit on keyb'd.
160881				X					X				
161304			X			X		X					
161828					X	X							
162245			X				X						
170196	X								X	X			Includes guard
172640		X							X	X	⊗		Fully perf. tape
178697	X											X	Includes guard
178698		X										X	Fully perf. tape
178917		X									⊗		Fully perf. tape
178918				X							X		
Parts Covered in Bulletin:						1167B	1167B	1167B, 1187B	1169B	1187B	1169B	1166B	

⊗ LPR & LTPE print over code holes. ⊗ LPR & LTPE print between feed holes.

MODIFICATION KIT APPLICATION AND USAGE (See Text Par. 1. for further details.)

FIGURE 6