


R167 V104
 R143 V103
 R141 R149
 R148 R150

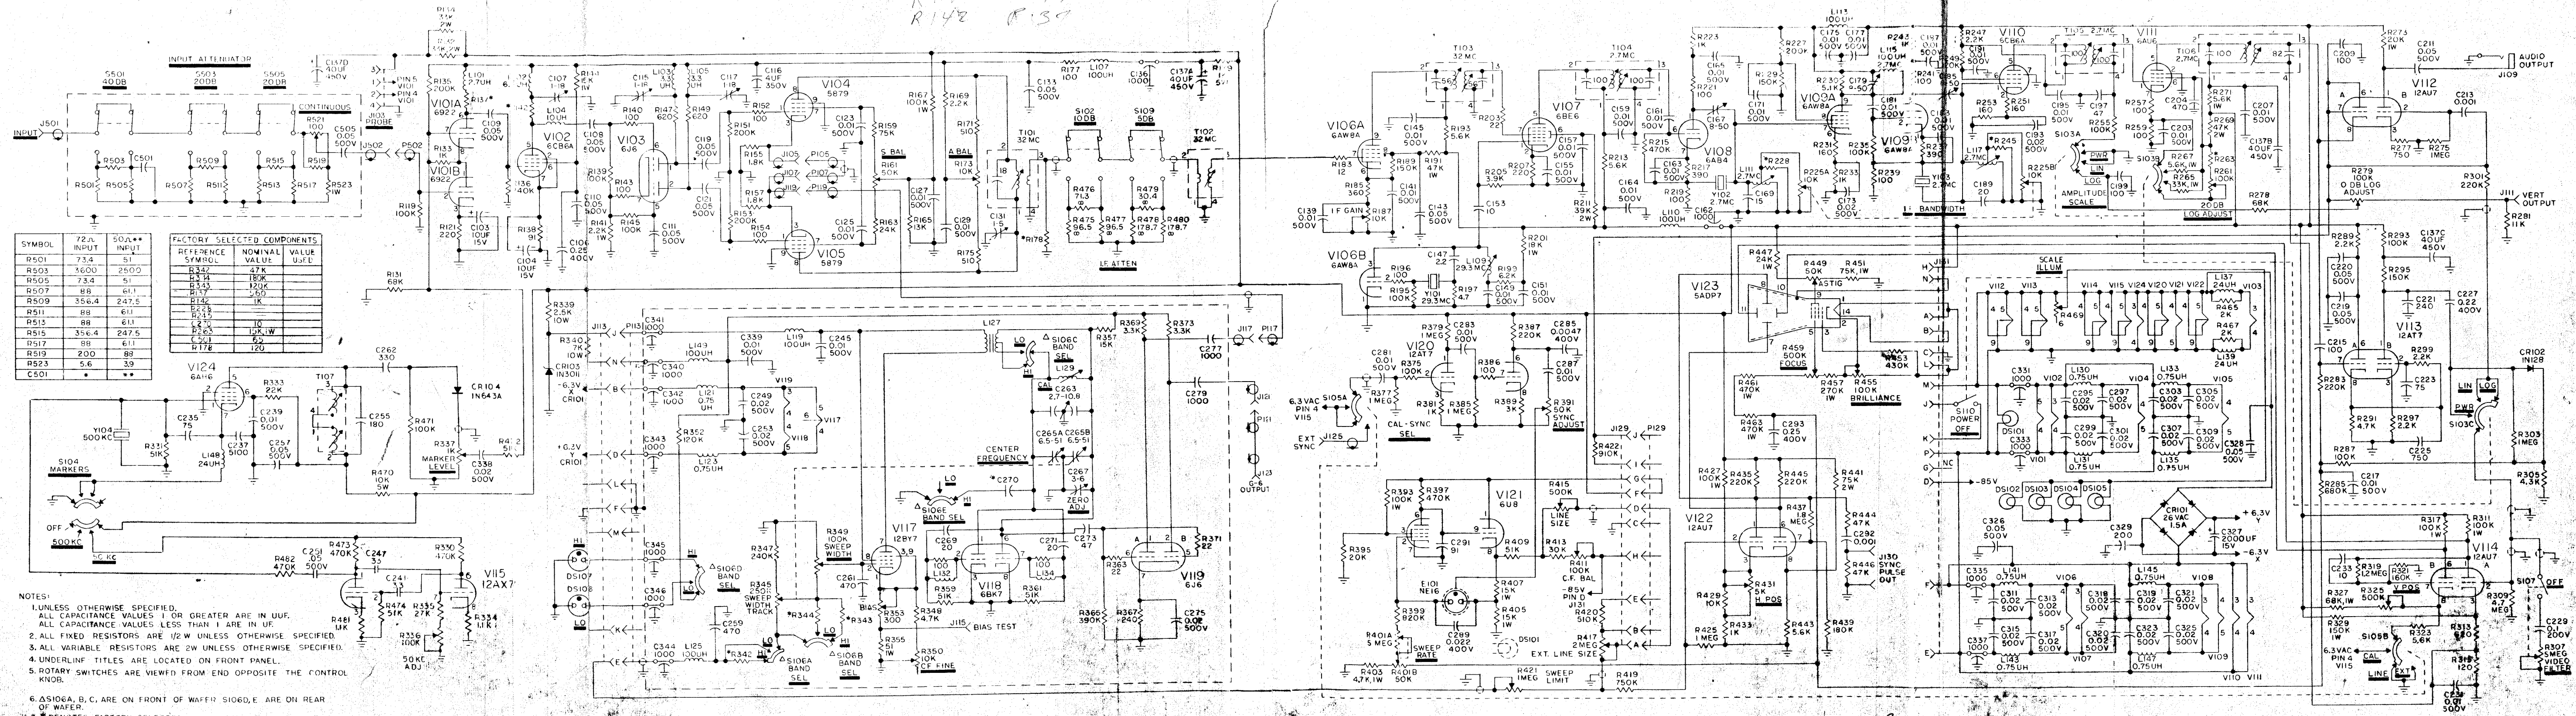

SYMBOL	72A INPUT	50A** INPUT
R501	73.4	51
R503	3600	2500
R505	73.4	51
R507	88	61.1
R509	356.4	247.5
R511	88	61.1
R513	88	61.1
R515	356.4	247.5
R517	88	61.1
R519	200	88
R523	5.6	3.9
C501	*	**

FACTORY SELECTED COMPONENTS	REFERENCE SYMBOL	NOMINAL VALUE	VALUE USED
R342	47K		
R344	180K		
R345	120K		
R347	250K		
R348	1K		
R349	10		
R350	100K		
R351	100K		
R352	100K		
R353	100K		
R354	100K		
R355	100K		
R356	100K		
R357	100K		
R358	100K		
R359	100K		
R360	100K		
R361	100K		
R362	100K		
R363	100K		
R364	100K		
R365	100K		
R366	100K		
R367	100K		
R368	100K		
R369	100K		
R370	100K		
R371	100K		
R372	100K		
R373	100K		
R374	100K		
R375	100K		
R376	100K		
R377	100K		
R378	100K		
R379	100K		
R380	100K		
R381	100K		
R382	100K		
R383	100K		
R384	100K		
R385	100K		
R386	100K		
R387	100K		
R388	100K		
R389	100K		
R390	100K		
R391	100K		
R392	100K		
R393	100K		
R394	100K		
R395	100K		
R396	100K		
R397	100K		
R398	100K		
R399	100K		
R400	100K		

- NOTES:
- UNLESS OTHERWISE SPECIFIED, ALL CAPACITANCE VALUES 1 OR GREATER ARE IN UUF. ALL CAPACITANCE VALUES LESS THAN 1 ARE IN UF.
 - ALL FIXED RESISTORS ARE 1/2W UNLESS OTHERWISE SPECIFIED.
 - ALL VARIABLE RESISTORS ARE 2W UNLESS OTHERWISE SPECIFIED.
 - UNDERLINE TITLES ARE LOCATED ON FRONT PANEL.
 - ROTARY SWITCHES ARE VIEWED FROM END OPPOSITE THE CONTROL KNOB.
 - AS106A, B, C, ARE ON FRONT OF WAFFER S106D, E ARE ON REAR OF WAFFER.
 - * DENOTES FACTORY SELECTED COMPONENTS.
 - ** DENOTES FACTORY SELECTED COMPONENTS FOR 50A SET.
 - Ω INDICATES 1% COMPONENT.

V101 C103
 V103 C104
 V104
 V105