

TOOLS


HOSES, PRESSURE - DESCRIPTION

1. GENERAL

- 1.01 This section covers noncoded Bell System pressure hoses.
- 1.02 When this section is reissued, the reason for reissue will be listed in this paragraph.
- 1.03 The information contained in this section supersedes the corresponding information in Section 074-655-101.

HOSES, PRESSURE, B, C, D, AND E

(In ordering, specify B, C, D, or E, and length of hose desired.)

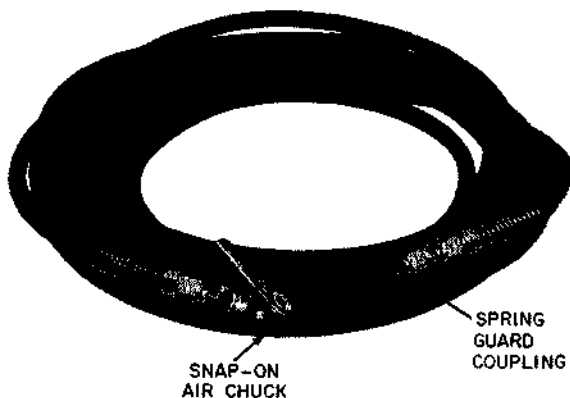

B HOSE ILLUSTRATED

The B and C pressure hoses, available in any desired length, are equipped at one end with a spring guard coupling. The other end of the B hose is equipped with a spring guard coupling and a snap-on air chuck. The other end of the C hose is equipped with a screw-on angle connector.

The D pressure hose, available in 6, 8, 12-1/2, and 25-foot lengths, is equipped at both ends with a spring guard coupling.

The E pressure hose, available in 10- and 30-foot lengths, is equipped at both ends with a spring guard coupling.

The fitting for the B pressure hose may be ordered as a replacement part as follows:

Chuck, Air

For use in making connections to various types of pressure regulators, torches, pressure testing valves, and heaters. (Specification AT-7676)

NOTICE

Not for use or disclosure outside the Bell System except under written agreement