


NONCODED TOOLS

BRUSHES

DESCRIPTION

BRUSH AND FILE CARD, HENRY DISSTON & SONS  
NO. 2 (OR EQUIVALENT)

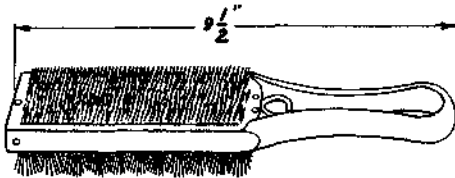

For use on operators chairs.

BRUSH, ARTISTS SABLE HIGGER, NO. 4  
Replaced by Brush, R-1575, No. 4


BRUSH, DEVOE & RAYNOLDS CO. 251, No. 2  
Replaced by Brush, KS-14162

BRUSH, BRONZING, RADIATOR, 1", 2" and 3"

A medium soft brush.

For use in applying aluminum enamels.

BRUSH, OSBORN MANUFACTURING CO. No. 816  
(OR EQUIVALENT)




A bristle brush having a twisted wire handle.

For use on operators chairs.

BRUSH, SASH, DEVOE & RAYNOLDS CO 5340, No. 5  
(OR EQUIVALENT)  
Replaced by Brush, Sash, Devoe & Reynolds Co.  
65272, No. 4

BRUSH, SASH, DEVOE & RAYNOLDS CO.  
(In ordering, specify size and number of  
brush desired.)




Size	Number	Dimensions	
		A	B
No. 4	65272	13/16" x 9/16"	1-3/4"
No. 8	65274	1-1/16" x 7/8"	2-1/4"

A chiseled-edge sash brush.

The No. 4 sash brush replaces the No. 5 sash brush and is for use in cleaning A- and B-type sequence switches, 157-type interrupters and plug cleaning machines.

The No. 8 sash brush is for use in applying soap solution to detect leaks in waveguide runs.


BRUSH, SIGN-PAINTERS, DEVOE & RAYNOLDS CO.,  
244 (OR EQUIVALENT), 1"



A 1" flat oxhair brush having soft hair bristles vulcanized in rubber.

For general use in retouching light finishes.



BRUSH, TYPEWRITER, LONG HANDLE.

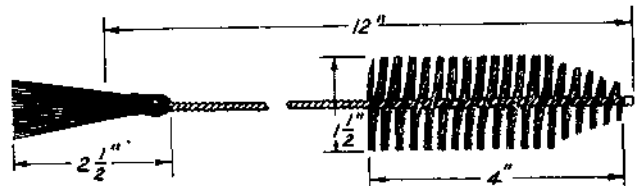

A bottle-type typewriter brush having a twisted wire handle, 12" long.

For use on friction roll drives and plunger-primary and secondary line and out-trunk switches.


BRUSH, KS-2993.

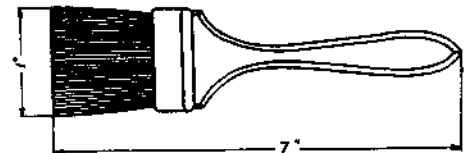

A soft hair brush with a wooden handle and a plastic ferrule.

For general use.

BRUSH, KS-3093.

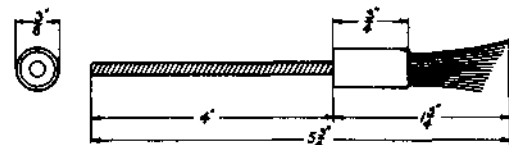


A bristle brush for use in conjunction with the KS-2629 vacuum cleaner attachment, on 153-type interrupters.

For general use.

SECTION 074-530-101

BRUSH, KS 6916

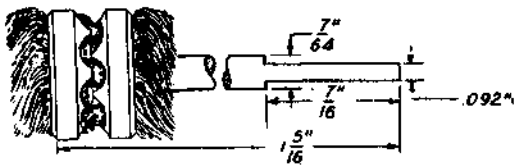


Replaces but not interchangeable with, the No. 133 tool (Spring Cleaning Tool).

For use in conjunction with No. 1495-WF All-Angle Drill.

The information covered herein replaces the part of Section 076-190-801 applying to this brush.

BRUSH, KS-13604

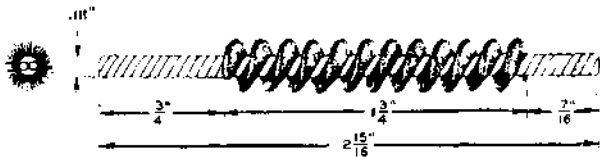


A soft nylon bristle brush.

Replaces the R-2448 Treating Brush.

For cleaning sequence switches and panel multiple banks.

BRUSH, KS-14162  
BRUSH, KS-14164

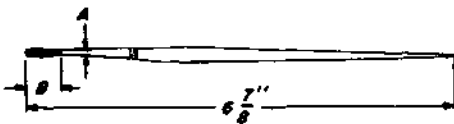

Brush	Size	Dimensions	
		"A"	"B"
KS-14162	2	1/16"	17/32"
KS-14164	4	3/32"	11/16"


Red sable round artists show card brushes.

The KS-14162 brush replaces the Devoe & Reynolds Co. 251, No. 2, Artists Show Card Brush.

The KS-14164 brush replaces the No. 4 Artists Show Card Brush, R-1575.

For general use.

BRUSH, KS-14208

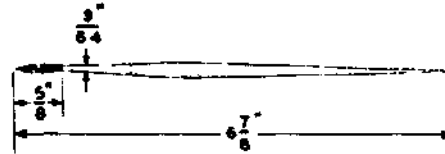

Red sable round artists brush. Furnished in cellulose acetate case.

For general use.

BRUSH, R-1021

A 1/2" flat varnish brush with a wooden handle and a rubber ferrule having bristles 1-3/8" long. General appearance similar to the KS-2993 brush.

For general use.

BRUSH, R-1575

Replaced by the KS-14164 Brush.

BRUSH, R-2119

A 3/16" flat artists brush. Over-all length approx. 7".

For applying cement to cables.

BRUSH, TREATING, R-2448


Replaced by the KS-13604 Brush.

BRUSH, R-2919

A round pointed camel hair brush. Outside diameter of ferrule at brush end is approximately 11/64" and length of hair outside of ferrule is 3/4". Over-all length of brush is approximately 8".


For use in touching up scratches and small marred areas on smooth finished equipment.

BRUSH, R-2966.

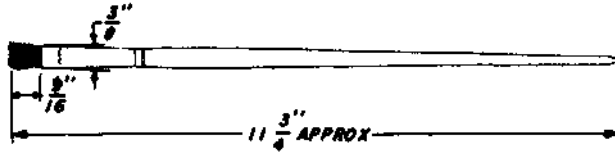

A flat, stiff artist's brush, No. 5.  
For use on precision-type interrupters,  
KS-13834 perforator and 1-type trans-  
lators.

BRUSH, R-2969.

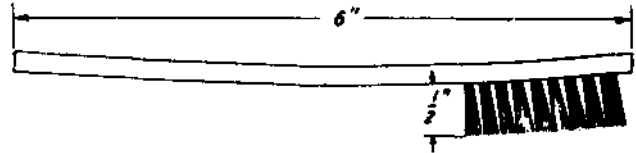

A stiff bristle typewriter-type brush, 6"  
long.  
For general use.