


ISSUE	DATE	AUTH NO.
2	12-5-63	79534
3	11-20-64	84989
4	2-26-65	86063

- | NO. | NOTES |
|-----|--|
| 1. | USE 60340RM TUBING TO INSULATE DIODE LEADS AND RESISTOR LEADS WHERE NECESSARY. |
| 2. | WIRE COLOR CODES:
WHITE - W
SLATE - S
BLACK - BK
RED - R
ORANGE - O |
| 3. | FUSE VALUE CORRESPONDING TO FUSE HOLDER XF951—1.5 A. |
| 4. | CONNECTIONS VIEWED FROM TERMINAL SIDE. |
| 5. | REFER TO 6444WD FOR SCHEMATIC WIRING. |
| 6. | * ASTERISK INDICATES WIRE IS NOT PART OF CABLE ASSEMBLY. |
| 7. | TERMINAL DESIGNATIONS IN PARENTHE-SIS () ARE FOR REFERENCE ONLY AND NOT MARKED ON COMPONENTS. |
| 8. | USE 198045 CABLE ASSEMBLY. |
| 9. | WIRES IDENTIFIED WITH ASTERISK ARE:
BLACK — RM31900
ORANGE — RM31901 |

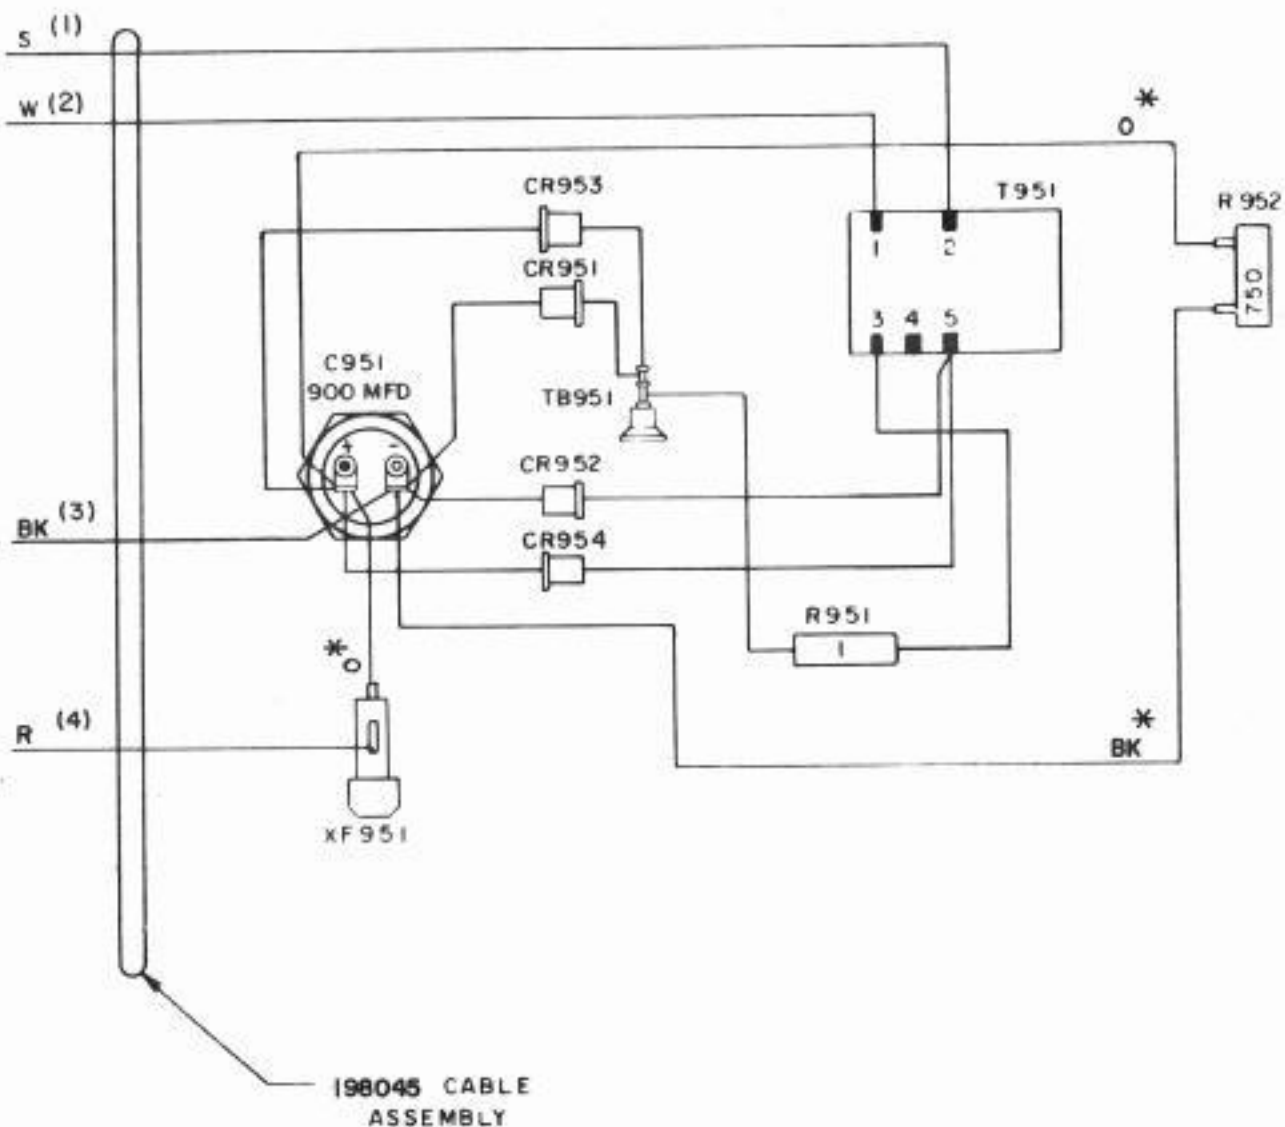

WDP

ACTUAL WIRING DIAGRAM FOR 48 VOLT POWER SUPPLY ASSEMBLY NO. 198000

APPROVALS

D AND R	E OF M
<i>[Signature]</i>	<i>[Signature]</i>
S. NUMBER	
PROD NO 6441 WD	
DATE 8-26-63	
PD FILE NO 1-A143 AA	
DRAWN AHP	CHKD
ENGR JHH	APPR <i>[Signature]</i>

TELETYPE CORPORATION

4 6441 WD