


NO.	NOTES
1.	COLOR CODE: BK BLACK G GREEN O ORANGE R RED BL BLUE S SLATE Y YELLOW BR BROWN P PURPLE W WHITE
2.	WIRING LEGEND DISTANT TERMINATING AREA DISTANT TERMINAL DESIGNATION WIRE COLOR CODE A-E-BK [OOA] NOTE 9
3.	ASSOCIATED CABLE ASSEMBLY 194794
4.	WIRES MARKED WITH ASTERISK ARE TO BE IN 8-LEVEL OPERATION ONLY. CONNECT TO CONTACT BLOCK, BUT DO NOT CONNECT TO DISTRIBUTOR DISC IN 5-LEVEL OPERATION.
5.	USE SPARK SUPPRESSOR ACROSS CLUTCH TRIP MAGNET WITH DC. ONLY. CONNECT TO TERMINALS 6 & 7.
6.	TERMINAL DESIGNATIONS ENCLOSED IN PARENTHESIS ARE NOT MARKED ON COMPONENTS.
7.	APPLY GROUNDING SIDE OF 117 VAC TO TERMINAL NO. 11. APPLY UNGROUNDING SIDE TO TERMINAL NO. 9. APPLY SWITCHED MOTOR POWER FROM UNGROUNDING SIDE TO TERMINAL NO. 8.
8.	APPLY TRIP MAGNET (117 VAC OR 48 VDC) POWER TO TERMINALS 6 & 7. FOR OPERATION FROM UNPOWERED CONTACTS. CONNECT CONTACTS ACROSS TERMINALS 7 & 10, AND CONNECT TERMINALS 6 & 11 WITH A STRAP.
9.	WIRING STATUS: RECTANGULAR BOX INDICATES HISTORY OF WIRING CHANGES [OO-B] B - DENOTES WIRING BEFORE THE CHANGE DESCRIBED BY THE DESIGNATED NOTE NUMBER ENTERED THE PRODUCT. [OO-A] A - DENOTES WIRING AFTER THE CHANGE DESCRIBED BY THE DESIGNATED NOTE NUMBER ENTERED THE PRODUCT.
10.	WIRING CHANGED FROM 24GA. TO 18 GA.

ACTUAL WIRING DIAGRAM

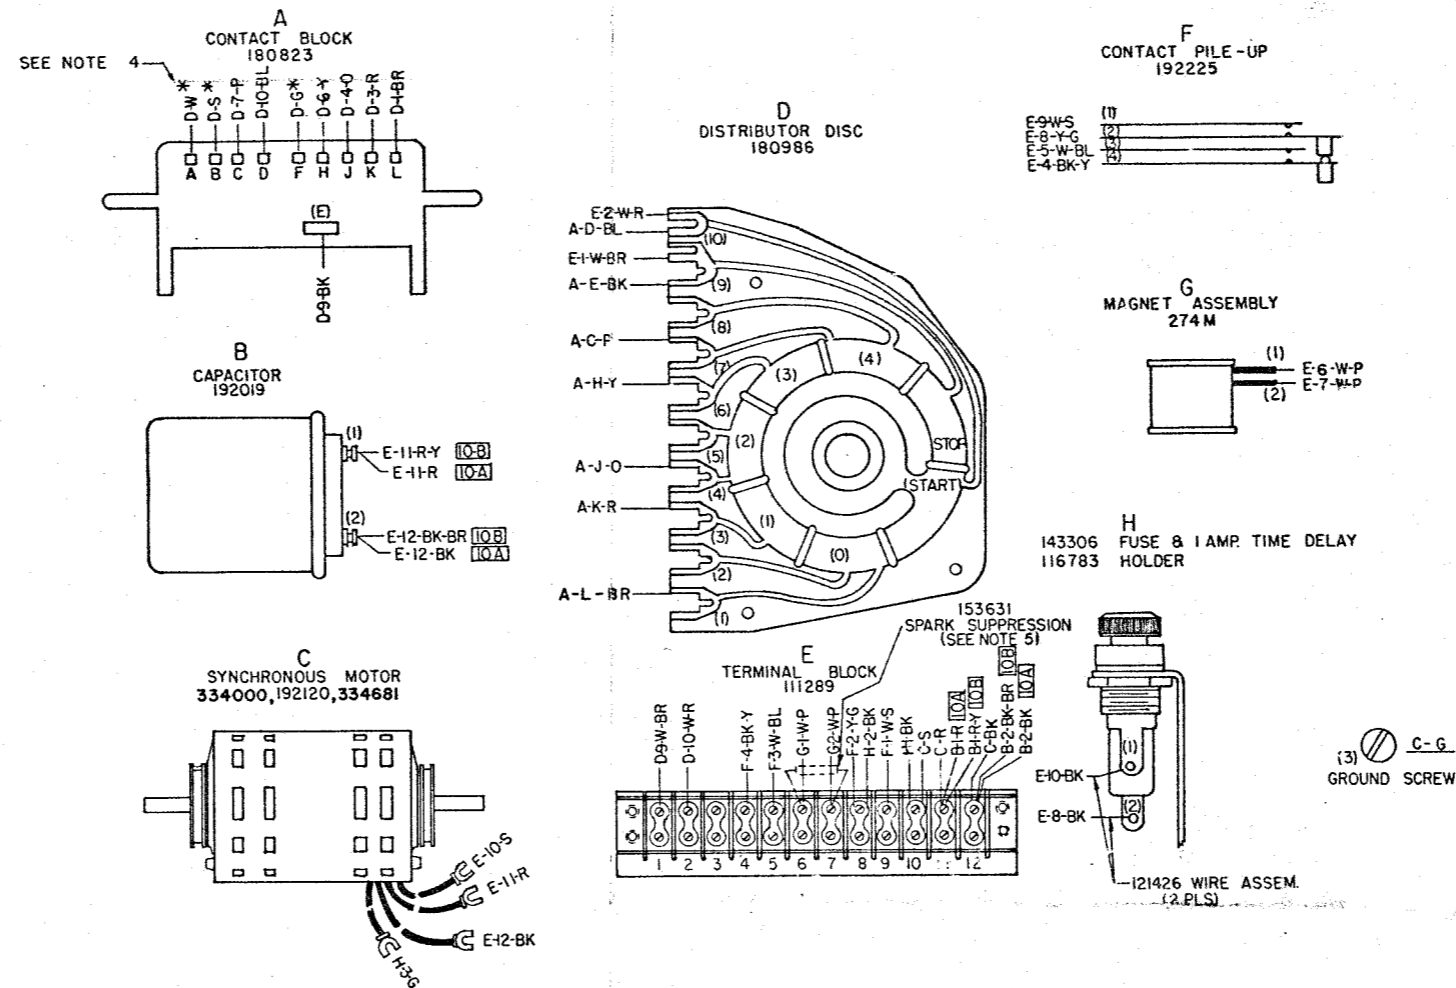


4728 WD

REVISIONS		
ISSUE	DATE	AUTH. NO.
2	9-15-65	85523-1
3	11-2-65	88829
4	3-18-66	89372
5	6-14-66	89762
6	9-9-70	1366
7	10-18-71	4425

RTTY ELECTRONICS
TELETYPE=Sales-Service-Parts
PO Box 20101 El Sobrante, Ca.
94820. (510)222-3102
mr_rtty@pacbell.net

SCHEMATIC WIRING DIAGRAM

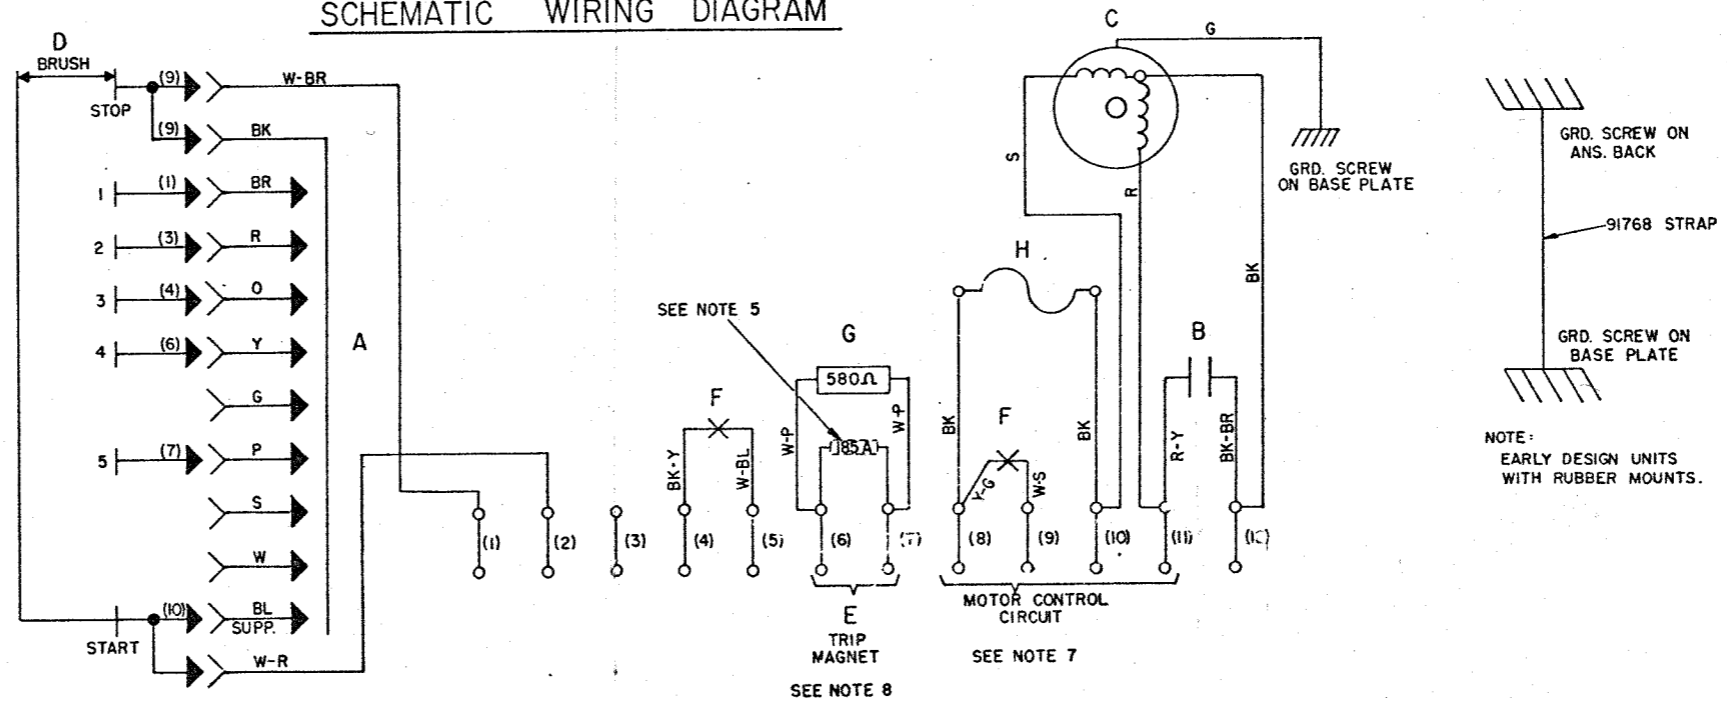

ACTUAL AND SCHEMATIC WIRING DIAGRAM FOR LABD 500 ANSWER BACK SELF-CONTAINED

APPROVALS

D AND R	E OF M
F.L.	N

E-NUMBER

PROD. NO. 4728 WD

DATE 9-21-62

P.D. FILE NO. 1A 151.76 A

DRAWN J.W.P. CHKD. H.G.K.

ENG. G.L. APPD. B.G.G.

TELETYPE CORPORATION

4728 WD

NOTE:
EARLY DESIGN UNITS WITH RUBBER MOUNTS.