


- NO. NOTES
- FOR ACTUAL WIRING DIAGRAMS OF INDIVIDUAL UNITS SEE WD NUMBERS OF COMPONENT UNITS.  
4952WD MODEL 28 SEND-RECEIVE BASE LTRK 5,6  
2900WD MOTOR UNITS — LMU3, LMU3B  
3628WD TYPING REPERFORATOR LPR 53
  - LEGEND  
    - A POWER TERMINAL STRIP ON LTRK (LOWER)
    - B LINE TERMINAL STRIP ON LTRK (UPPER)
    - U AUXILIARY TERMINAL STRIP ON LTRK (REAR)
    - R MOTOR TERMINAL STRIP ON LTRK
    - ◁ C 36 POINT CONNECTOR
    - ◁ F 16 POINT CONNECTOR
    - ◁ S LOW TAPE CONTACT (PLUG)
    - ◁ T LOW TAPE CONTACT (RECEPTACLE)
  - ALL APPARATUS IS SHOWN IN UN OPERATED OR DE-ENERGIZED POSITIONS.
  - RESISTANCE VALUES IN OHMS (—) CAPACITANCE VALUES IN MICROFARADS (MFD)
  - CIRCUITS SHOWN FOR .060 AMP. NEUTRAL SIGNAL LINE OPERATION. FOR .020 AMP. LINE CURRENT, ADD DASHED LINE (---) CONNECTION AND OMIT CONNECTIONS MARKED (\*).
  - USE SYNCHRONOUS MOTOR ON REGULATED 60 Hz (±1%) AC POWER ONLY.
  - COIL OPERATES ON DC, 50 MA. PULSE ONLY.
  - DOT DASH ——— LINES INDICATE FILTERING, SHIELDING AND SUPPRESSION NETWORKS.
  - CUSTOMER TO STRAP TERMINALS 1 AND 9 ON PLUG.
  - 3 SPARE WIRES TIED BACK AT F CONNECTOR
  - TWO SPARE WIRES TAPED AND TIED BACK TO CABLE ASSEMBLY.

RTTY ELECTRONICS  
TELETYPE=Sales-Service-Parts  
PO Box 20101 El Sobrante, Ca.  
94820. (510)222-3102  
mr\_rtty@pacbell.net

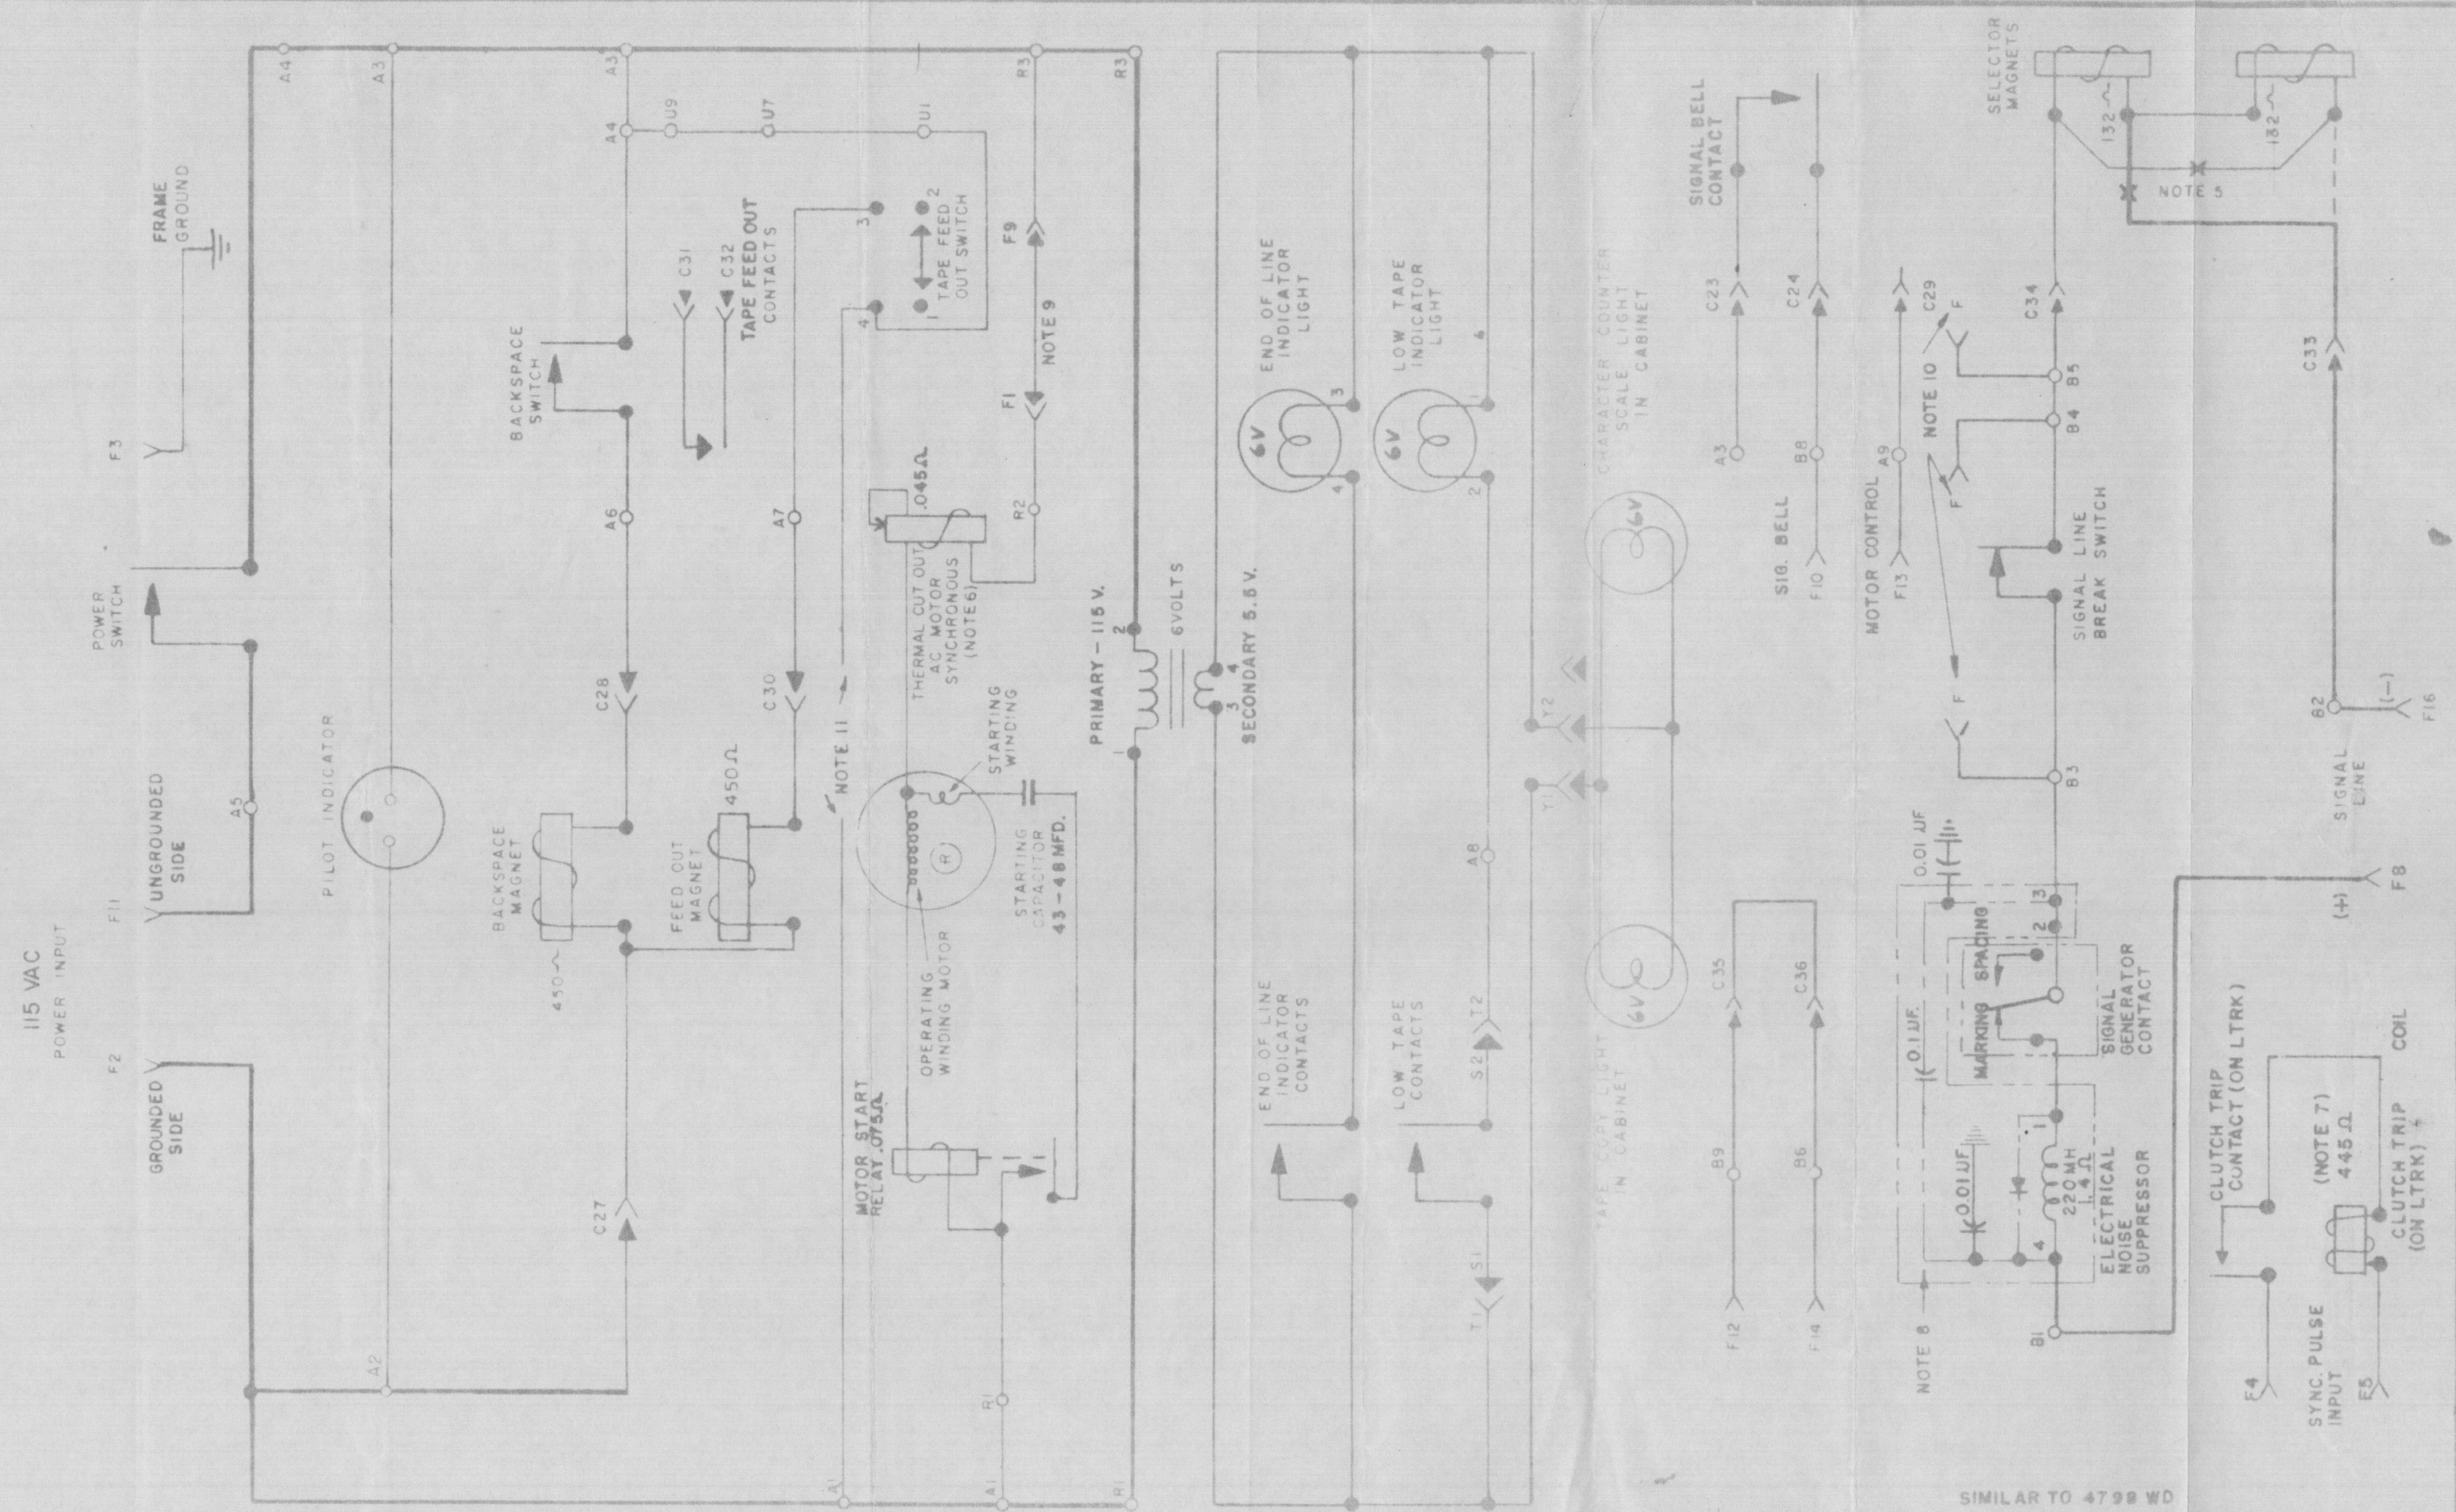

SIMILAR TO 4799 WD

4953 WD		
REVISIONS		
ISSUE	DATE	AUTH. NO.
2	1-21-64	79998
3	1-3-64	84419
4	1-29-65	86017

SCHEMATIC WIRING DIAGRAM MODEL 28  
SEND RECEIVE TYPING REPERFORATOR KEYBOARD LTRK 5,6  
TYPING REPERFORATOR LPR 53,9  
LMU3  
LMU3B

APPROVALS	
D AND S	E OF W
E - NUMBER	
PROD. NO. 4953 WD	
DATE 2-17-64	
P.D. FILE NO. 10-18.65AA	
DRAWN R.L.W.	CHKD. [Signature]
ENGD. N.W.K.	APPD. [Signature]
TELETYPE CORPORATION	
4953WD	