
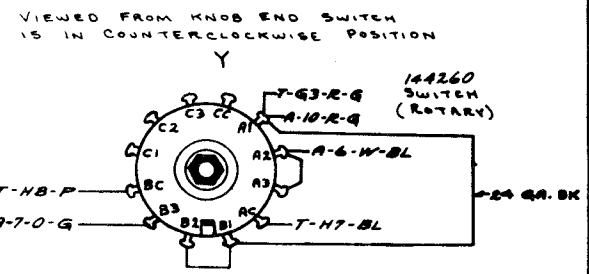
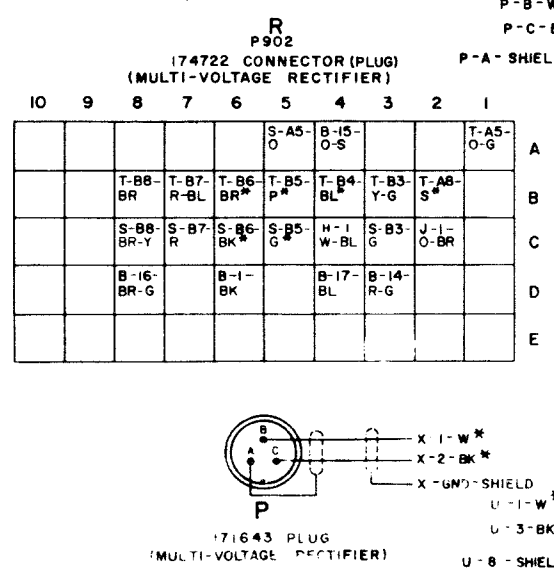
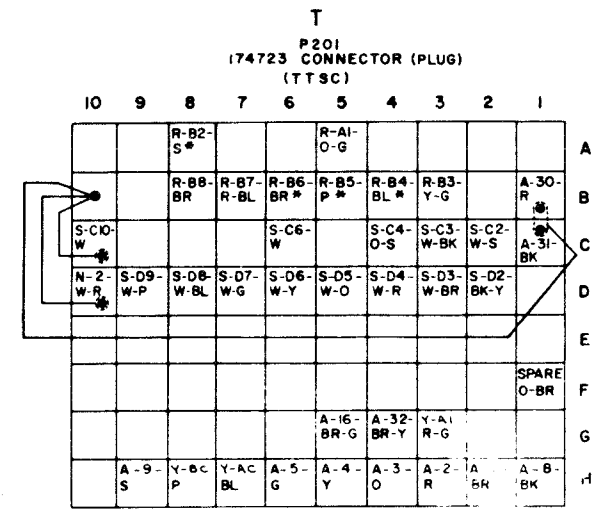
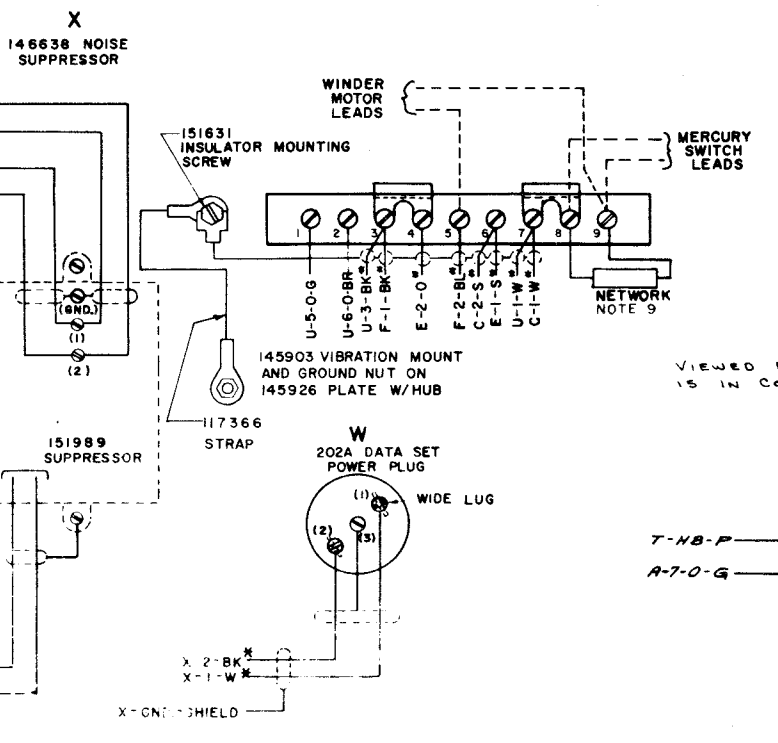
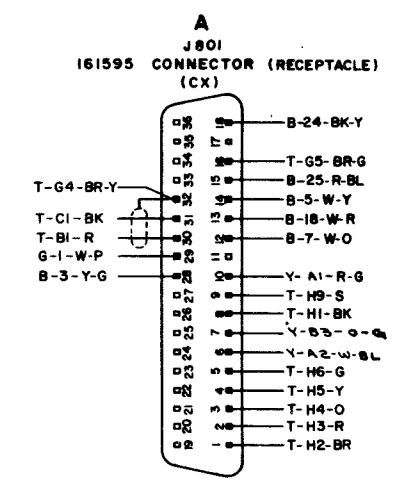
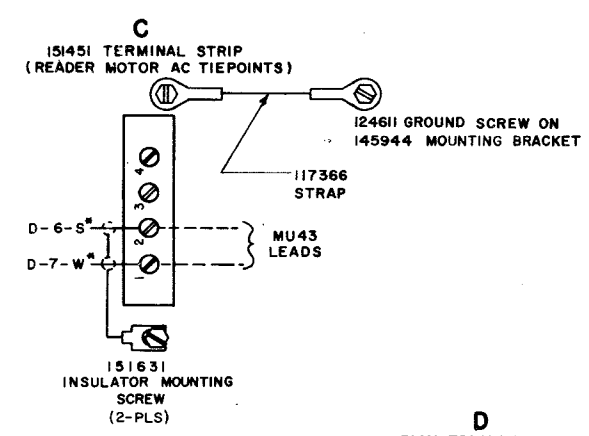
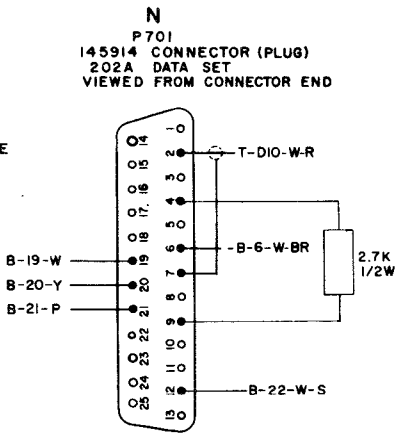
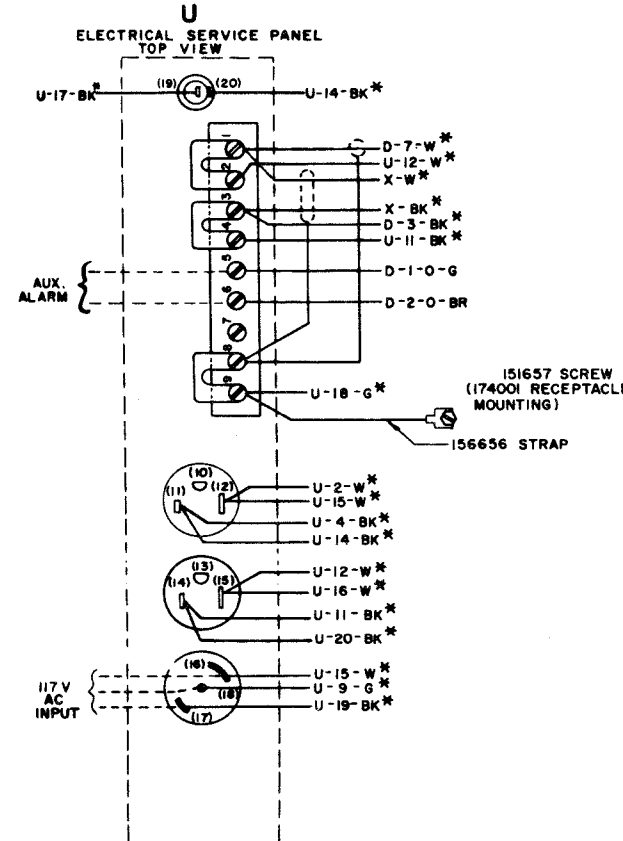
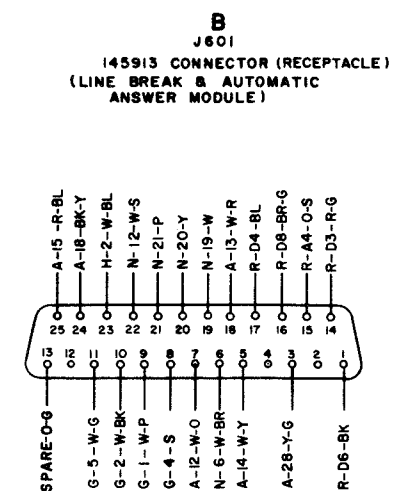
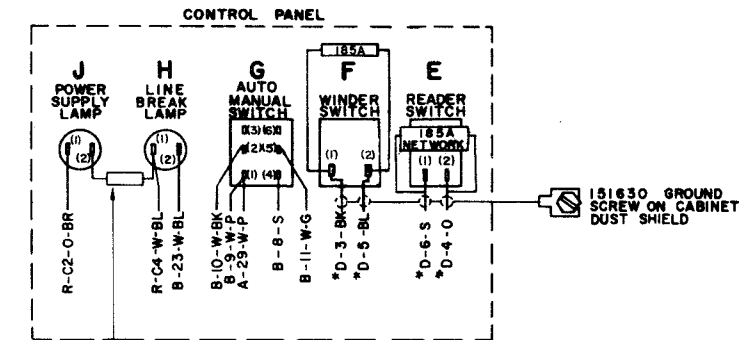


- NOTES
1. WIRING LEGEND:
 - DISTANT TERMINATING AREA
 - T-09-W-P WIRE COLOR CODE
 - DISTANT TERMINATING DESIGNATION
 2. USE SLEEVING TO INSULATE WHERE NECESSARY.
 3. ALL CONNECTIONS VIEWED FROM SOLDER END UNLESS OTHERWISE SPECIFIED.
 4. NUMBERS IN () NOT MARKED ON COMPONENTS.
 5. * DENOTES 18GA WIRE.
 6. ⊙ DENOTES SHIELDED WIRE.
 7. FOR SCHEMATIC WIRING DIAGRAM REFER TO 5941 WD
 8. SPARE WIRES TO HAVE 173715 TERMINALS ON DISTANT TERMINATING END - TAPED SEPARATE AND TIE TO CABLE AT N CONNECTOR.
 9. LATER UNITS HAVE 309899 NETWORK FOR IMPROVED ARC SUPPRESSION.

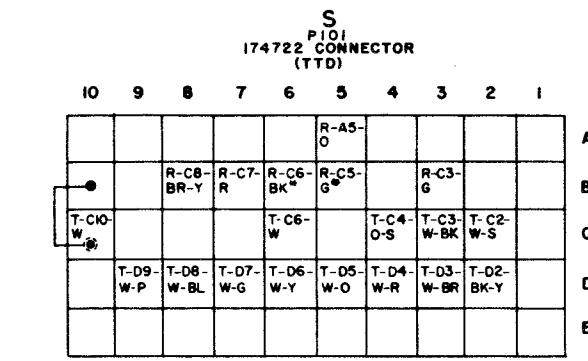

5940WD			
REV	DATE	AUTH	RE
1	11-13-68	TREB	
2	11-13-68	TREB	
3	11-13-68	TREB	
4	11-13-68	TREB	
5	11-13-68	TREB	
6	12-14-68	TREB	
7	12-14-68	TREB	
8	12-14-68	TREB	
9	12-14-68	TREB	

ACTUAL WIRING DIAGRAM FOR AC 348 DATASPEED TRANSMITTING TERMINAL

APPROVALS

DATE: 9-26-68
REV. NO. 5940WD
FILE NO. 1-A-MB/1544A
DRAWN: [Signature]
ENGR. E.H.E./APP
CORPORATION

5940WD

RITTY ELECTRONICS
TELETYPE-Sales-Service-Parts
PO Box 20101 El Sebrante, Ca.
94820 (510)222-3192
mr_rtty@pacbell.net

R 20 1/2 16 1/2 X 10 3/4