

EQUIP. TYPE: *F398A/161AR* EXP. NO.


NOTICE: WHEN GOVERNMENT DRAWINGS, SPECIFICATIONS, OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE UNITED STATES GOVERNMENT THEREBY INCURS NO RESPONSIBILITY FOR ANY OMISSIONS, ERRORS, OR THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, PROVIDED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE, OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

THIS DOCUMENT HAS BEEN PURCHASED BY THE GOVERNMENT AND MAY BE REPRODUCED AND USED IN CONNECTION WITH ANY GOVERNMENT PROCUREMENT OR BANTYERLAGE OPERATION.

FOR INFORMATION ONLY. CONTRACTOR MAY AT HIS OPTION DEVIATE FROM THESE PROCESS DETAILS.

X SWE APPROVAL
SYM *PR1002-5*

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL
A ₂	A ₁ ADDED APPL. SM-D-343620 A ₂ WAS M262	9 OCT 59	4242B-PC 59-A1-51 REV'D PME

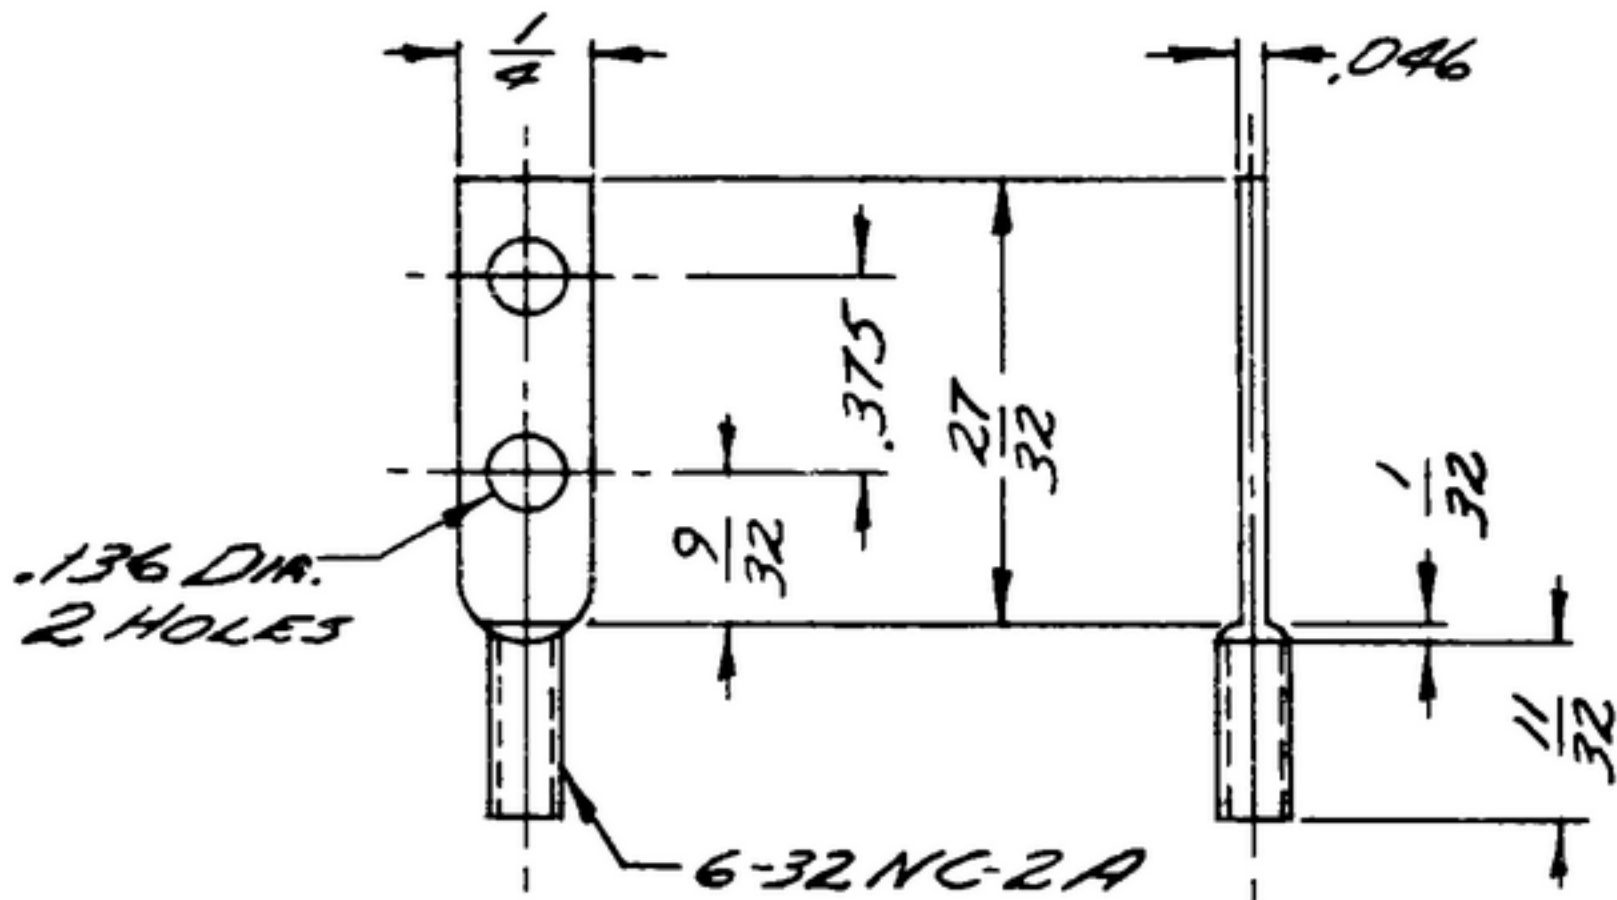

NOTES:
1. PART MAY BE NO. (A2 & F6-1175) AS SUPPLIED BY WELCO MFG. CO., CHICAGO, ILL. OR EQUAL, PROVIDING IT MEETS THE FOLLOWING REQUIREMENTS AND DIMENSIONS SHOWN.

DESCRIPTION: SPADE BOLT WITH TWO ATTACHMENT HOLES.
MATERIAL: STEEL
FINISH: M-262A PER SPEC MIL-F-1407E (A₂)

(A₁)

COLLINS PART NO.	QTY	ASSY	PART NO.	DESCRIPTION	MATL	MATL SPEC
------------------	-----	------	----------	-------------	------	-----------

LIST OF MATERIAL

COLLINS PART NO. *559-9250-002*

COLLINS NO.	QTY	NEXT ASSY	USED ON	DRAWN	CHECKED	APPROVED	COLLINS-RADIO CO. CEDAR RAPIDS, IOWA	DEPARTMENT OF THE ARMY SIGNAL CORPS ENGINEERING LABORATORIES
558 0363 000	1	SM-D-248992		<i>L BRIGGS</i>	<i>ES</i>		<i>1421A-PH-51-93</i>	<p>PORT MONMOUTH NEW JERSEY</p> <p><i>BOLT - SPADE</i></p> <p><i>SM-B-283163</i></p>
558 0345 002	1	SM-B-248992						
558 0343 002	1	SM-B-248993						
558 0342 002	1	SM-B-248992						
558 0312 002	2	SM-B-248963	<i>SC-DL-248775</i>					
APPLICATION				<p>UNLESS OTHERWISE SPECIFIED: DECIMAL DIMENSIONS INCLUDING HOLE SIZES MAY VARY ±.005 FRACTIONAL DIMENSIONS INCLUDING HOLE SIZES MAY VARY ±1/64 MACHINED ANGLES MAY VARY ±.1° SHEARED ANGLES MAY VARY ±.25° BROKEN ANGLES MAY VARY ±1° ECCENTRICITY BETWEEN ANY DIAMETERS ON THE SAME CENTERLINE SHALL NOT EXCEED .010 TOTAL INDICATOR READING. ALL DIMENSIONS ARE FINISH DIMENSIONS INCLUDING APPLIED FINISH AND ARE GIVEN IN INCHES.</p>			<p>SIGNAL CORPS</p> <p>REVIEWED <i>PME</i></p> <p>APPROVED <i>HLY</i> <i>PME</i></p> <p>DATE <i>17 JAN 58</i> SCALE <i>2/1</i></p>	