
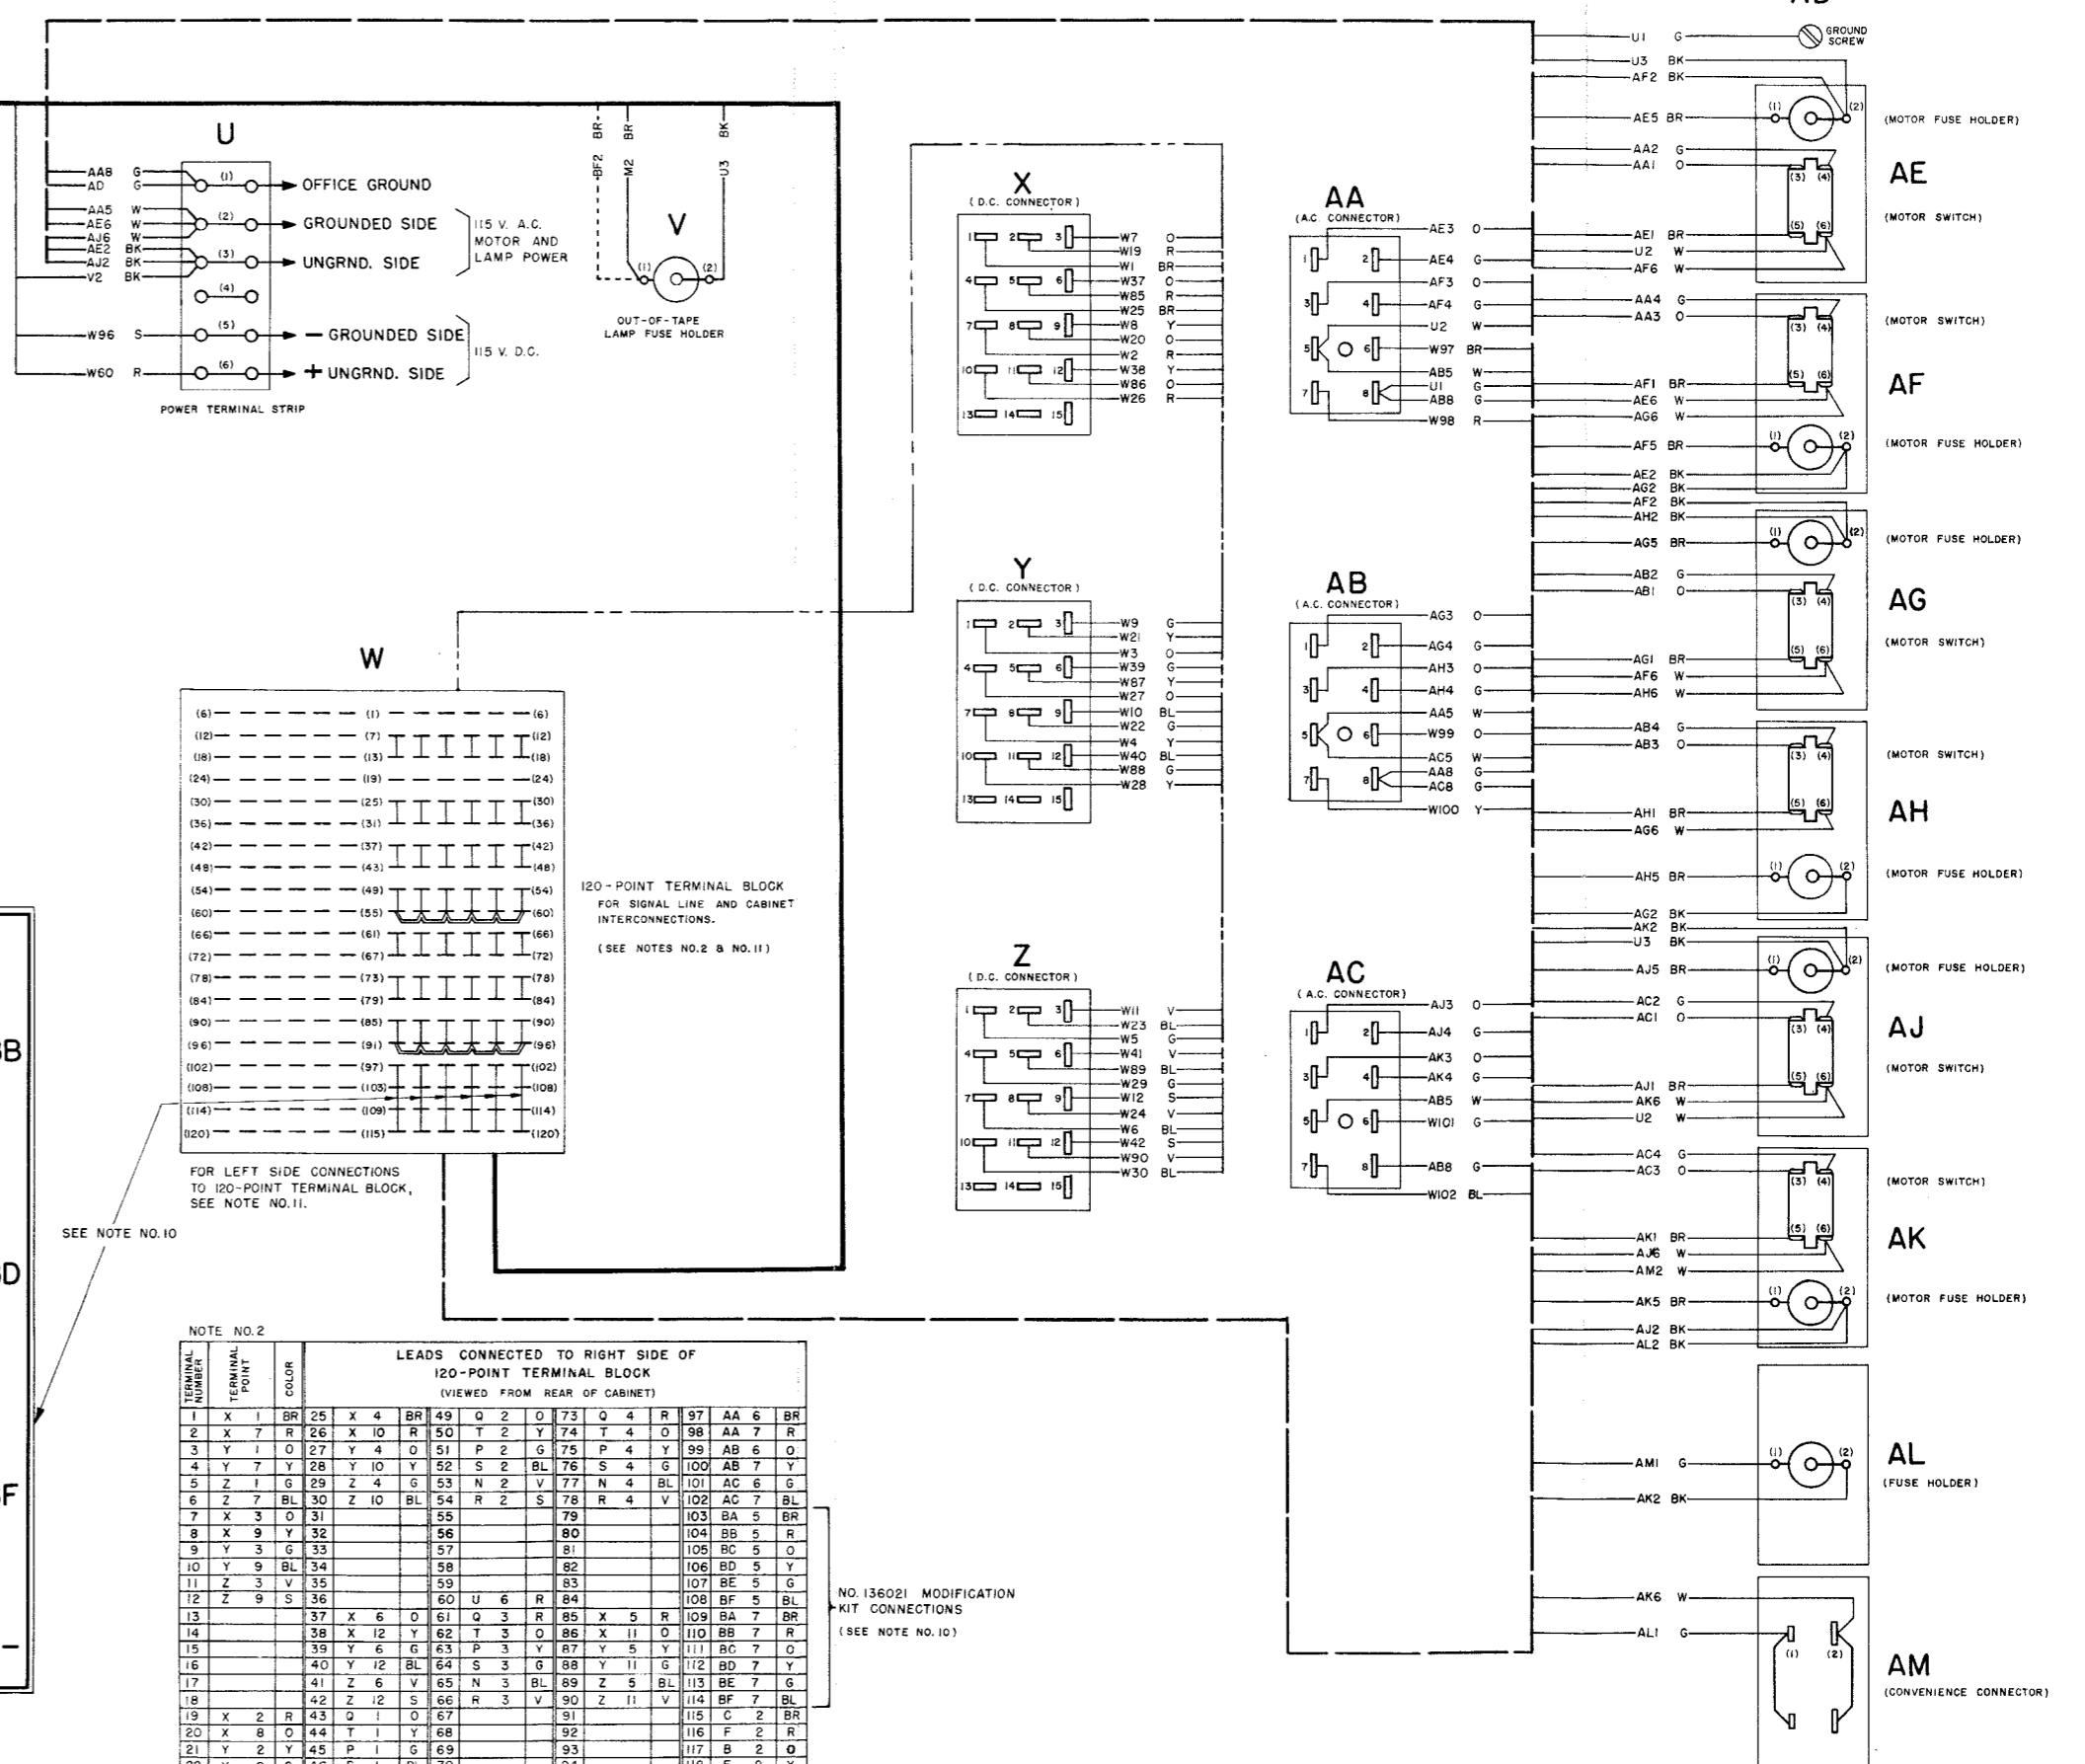
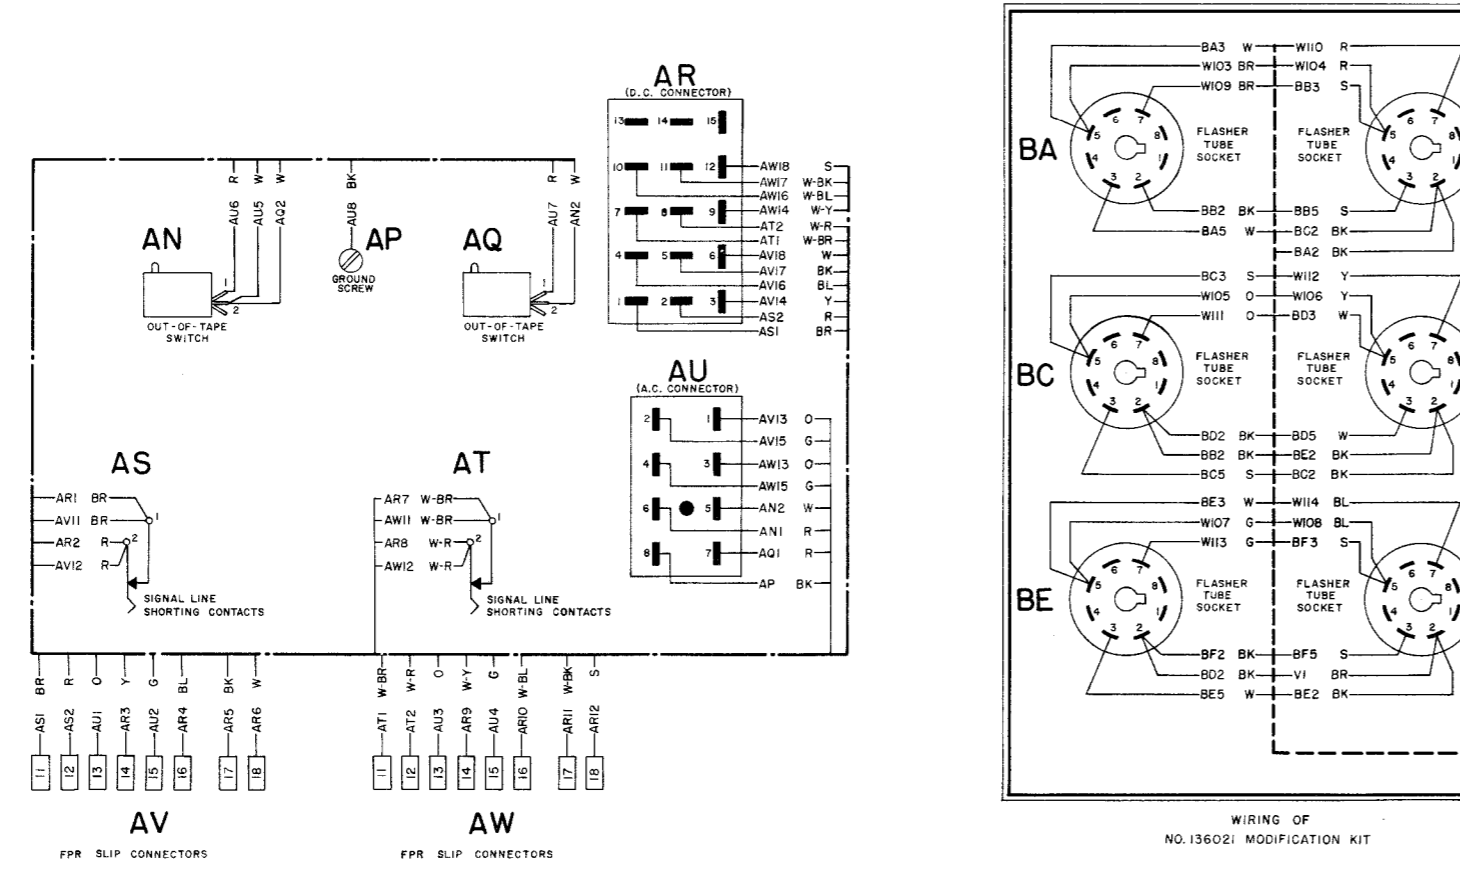


- NOTES**
1. WIRING LEGEND:  
 DISTANT TERMINATING AREA  
 DISTANT TERMINATING DESIGNATION  
 WIRE COLOR CODE
  2. NOTE NO.2 IS LOCATED IN LOWER CENTER OF DRAWING.
  3. MOTOR POWER FUSETRON OR FUSTAT AND ALTERNATE FUSE PROTECTION:  
 MOTOR FUSETRON OR FUSTAT ALTERNATE FUSE  
 115V A.C. - 60 CYCLES SYN. 3 AMP. 6 AMP.  
 115V A.C. - 60 CYCLES DCV. 1.8 AMP. 3 AMP.
  4. ASSOCIATED CABLES:  
 136527 CABLE, CONTROL  
 136528 CABLE, POWER (A.C.)  
 136529 CABLE (D.C.)  
 136550 CABLE, DRAWER  
 136539 CABLE, BLINKER (MOD. KIT ONLY)  
 STRAPS ON TERMINAL BLOCK - 39522RM.
  5. WIRE COLOR CODE AND SYMBOLS:  
 BK - BLACK O - ORANGE W - WHITE  
 BL - BLUE R - RED Y - YELLOW  
 BR - BROWN S - SLATE  
 G - GREEN V - VIOLET  
 W-BK - WHITE-BLACK W-BL - WHITE-BLUE  
 W-BR - WHITE-BROWN W-R - WHITE-RED  
 W-Y - WHITE-YELLOW
  6. CONNECTORS SHOWN FROM PRONG AND SLOT ENDS.
  7. COLOR CODED STRAPPING INCLUDED IN ASSOCIATED CABLE.
  8. STRAPPING INDICATED BY DOUBLE LINE (====) IS NOT INCLUDED IN FORMED CABLE.
  9. TERMINAL DESIGNATIONS ENCLOSED IN PARENTHESES ARE NOT MARKED ON COMPONENTS.
  10. WHEN MODIFICATION KIT NO. 136021 (FOR BLINKER OPERATION OF OUT-OF-TAPE LAMPS) IS USED, REMOVE THE FOLLOWING STRAPS:  
 WI03 TO WI09 WI04 TO WI10 WI05 TO WI14  
 WI06 TO WI12 WI07 TO WI13 WI08 TO WI14  
 AND CONNECT 136539 CABLE, BLINKER-TO THE 120-POINT TERMINAL BLOCK (LOCATED AT "W"), AS INDICATED.
  11. EXTERNAL SIGNAL LINE CONNECTIONS FOR THE FOLLOWING, ARE TO BE MADE BY THE CUSTOMER TO THE LEFT SIDE (AS VIEWED FROM REAR OF THE CABINET) OF THE 120-POINT TERMINAL BLOCK:  
 TOP SHELF LEFT REPERFORATOR - CONNECT TO TERMINALS W1 & W9  
 RIGHT REPERFORATOR - CONNECT TO TERMINALS W2 & W10  
 MIDDLE SHELF LEFT REPERFORATOR - CONNECT TO TERMINALS W3 & W11  
 RIGHT REPERFORATOR - CONNECT TO TERMINALS W4 & W12  
 LOWER SHELF LEFT REPERFORATOR - CONNECT TO TERMINALS W5 & W13  
 RIGHT REPERFORATOR - CONNECT TO TERMINALS W6 & W14

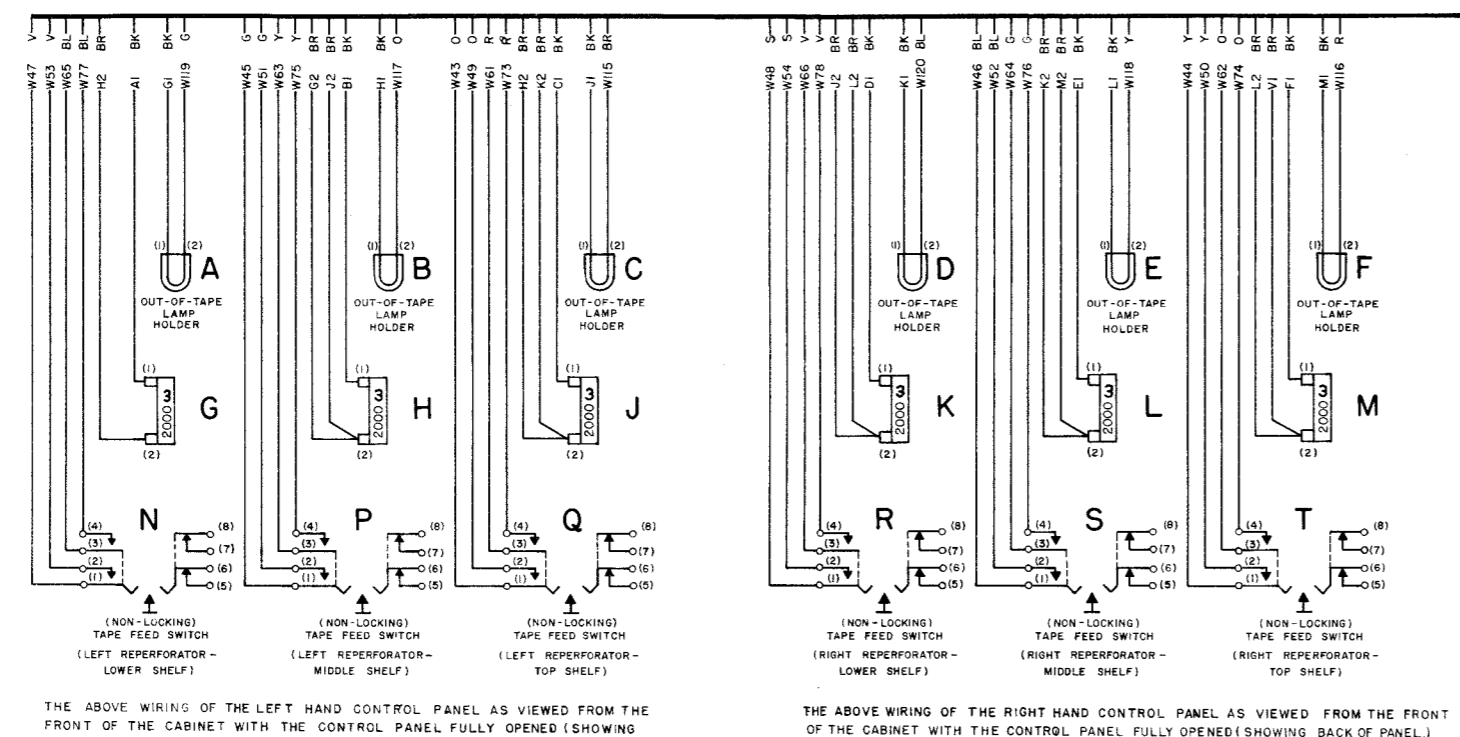

NOTE NO. 2

LEADS CONNECTED TO RIGHT SIDE OF 120-POINT TERMINAL BLOCK (VIEWED FROM REAR OF CABINET)

TERMINAL NUMBER	TERMINAL POINT	COLOR	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
1	X	1	BR	25	X	4	BR	49	Q	2	O	73	Q	4	R	97	AA	6	BR							
2	X	7	R	26	X	10	R	50	T	2	Y	74	T	4	O	98	AA	7	R							
3	Y	1	O	27	Y	4	O	51	P	2	G	75	P	4	Y	99	AB	6	O							
4	Y	7	Y	28	Y	10	Y	52	S	2	BL	76	S	4	G	100	AB	7	Y							
5	Z	1	G	29	Z	4	G	53	N	2	V	77	N	4	BL	101	AC	6	G							
6	Z	7	BL	30	Z	10	BL	54	R	2	S	78	R	4	V	102	AC	7	BL							
7	X	3	O	31				55				79				103	BA	5	BR							
8	X	9	Y	32				56				80				104	BB	5	R							
9	Y	3	G	33				57				81				105	BC	5	O							
10	Y	9	BL	34				58				82				106	BD	5	Y							
11	Z	3	V	35				59				83				107	BE	5	G							
12	Z	9	S	36				60	U	6	R	84				108	BF	5	BL							
13				37	X	6	O	61	Q	3	R	85	X	5	R	109	BA	7	BR							
14				38	X	12	Y	62	T	3	O	86	X	11	O	110	BB	7	R							
15				39	Y	6	G	63	P	3	Y	87	Y	5	Y	111	BC	7	O							
16				40	Y	12	BL	64	S	3	G	88	Y	11	G	112	BD	7	Y							
17				41	Z	6	V	65	N	3	BL	89	Z	5	BL	113	BE	7	G							
18				42	Z	12	S	66	R	3	V	90	Z	11	V	114	BF	7	BL							
19	X	2	R	43	O	1	O	67				91				115	C	2	BR							
20	X	8	O	44	T	1	Y	68				92				116	F	2	R							
21	Y	2	Y	45	P	1	G	69				93				117	B	2	O							
22	Y	8	G	46	S	1	BL	70				94				118	E	2	Y							
23	Z	2	BL	47	N	1	V	71				95				119	A	2	G							
24	Z	8	V	48	R	1	S	72				96	U	5	S	120	D	2	BL							

NO. 136021 MODIFICATION KIT CONNECTIONS (SEE NOTE NO. 10)