

GOVERNMENT NOMENCLATURES
OF
TELETYPE CORPORATION SETS

Issued by:

Department 1121

February 1, 1971

February 1, 1971

GENERAL INDEX BY SECTIONS

1. MODEL 28 AND 35 AUTOMATIC SEND-RECEIVE PAGE PRINTER SETS WITH TAPE PUNCH AND READER
 - A. Standard High Level Sets
 - B. Low Level Sets
2. MODEL 28 RECEIVE-ONLY PAGE PRINTER SETS
 - A. Standard High Level Sets
 - B. Low Level Sets
3. MODEL 28 AND 35 AUTOMATIC SEND-RECEIVE PAGE PRINTER SETS
 - A. Standard High Level Sets
 - B. Low Level Sets
4. MODEL 28 SEND-RECEIVE TYPING REPERFORATORS
 - A. Standard High Level Sets
 - B. Low Level Sets
5. MODEL 28 RECEIVE-ONLY TYPING REPERFORATORS
 - A. Standard High Level Sets
 - B. Low Level Sets
6. MODEL 28 TORN TAPE EQUIPMENT
 - A. Standard High Level Equipment
 - B. Low Level Equipment
7. MODEL 28 TYPING REPERFORATOR TRANSMITTER DISTRIBUTOR EQUIPMENT
 - A. Standard High Level Equipment
 - B. Unassigned
8. MODEL 28 TAPE TRANSMITTER DISTRIBUTOR SETS
 - A. Standard High Level Sets
 - B. Low Level Sets
9. HIGH SPEED EQUIPMENT
 - A. High Speed Tape Punch Sets
 - B. High Speed Tape Reader Sets
10. MODEL 28 MULTIPLE (STACK-MOUNTED) SEND-RECEIVE AND RECEIVE-ONLY PAGE PRINTER SETS
 - A. Standard High Level Sets
 - B. Low Level Sets

11. SIGNAL DISTORTION TEST SETS
12. LOW-LEVEL SIGNAL MODIFICATION KITS FOR
MODEL 28 TYPE EQUIPMENT
13. MODEL 37 ASR & KSR EQUIPMENT
 - A. Unassigned
 - B. Low Level Sets
14. INKTRONIC RECEIVE-ONLY PAGE PRINTER
 - A. High Level Sets
 - B. Unassigned

NOTE: NOMENCLATURED SETS FILED IN SECTIONS ALPHABETICALLY.

PHOTOS SHOWN ARE ONLY REPRESENTATIVE OF SOME SETS
INCLUDED IN EACH SECTION.

Issued by:

Department 1121

February 1, 1971

REFERENCE INDEX OF NOMENCLATURE TO SECTION

AN/FGC-56	Model 28 ASR Set	Section 1A
AN/FGC-56X	Model 28 ASR Set	Section 1A
AN/FGC-58	Model 28 ASR Set	Section 1A
AN/FGC-58X	Model 28 ASR Set	Section 1A
AN/FGC-69	Model 28 Multiple Page Printer Monitor Group	Section 10A
AN/FGC-69X	Model 28 Page Printer Monitor Group	Section 10A
AN/FGC-72AX	Model 28 Send-Receive Page Printer Set	Section 3A
AN/FGC-72BX	Model 28 Floor Mounted Send- Receive Page Printer Set	Section 3A
AN/FGC-72X	Model 28 Send-Receive Rack Mounted Page Printer Set	Section 3A
AN/FGC-74	Model 28 Multiple Page Printer Monitor Console Set	Section 10A
AN/FGC-74A	Model 28 Multiple Page Printer Set	Section 10A
AN/FGC-74X	Model 28 Multiple Page Printer Monitor Console Set	Section 10A
AN/FGC-79	Model 28 Multiple Page Printer Monitor Console Set	Section 10A
AN/FGC-79A	Model 28 Multiple Page Printer Monitor Console Set	Section 10A
AN/FGC-79AX	Model 28 Multiple Page Printer Monitor Console Set	Section 10A
AN/FGC-79X	Model 28 Multiple Page Printer Monitor Console Set	Section 10A
AN/FGC-96	Model 28 Multiple Page Printer Monitor Console Set	Section 10A
AN/FGC-96A	Model 28 Multiple Page Printer Monitor Console Set	Section 10A
AN/FGC-96X	Model 28 Multiple Page Printer Monitor Console Set	Section 10A
AN/FGC-97	Model 28 Send-Receive Page Printer Set	Section 3A
AN/FGC-97X	Model 28 Send-Receive Page Printer Set	Section 3A
AN/FGC-98X	Model 28 Send-Receive Rack Mounted Printer Set	Section 3A
AN/FGC-100	Model 28 Multiple Page Printer Set	Section 10A
AN/FGC-100A	Model 28 Multiple Page Printer Set	Section 10A
AN/FGC-101	Model 28 Multiple Page Printer Set	Section 10A
AN/FGC-116	Model 28 Receive-Only Rack Mounted Page Printer Set	Section 2A
AN/FGC-144	Model 28 KSR Set - Low Level	Section 3B
AN/FGC-148	Model 28 Low-Level KSR Set	Section 3B

AN/FGR-5A	Model 28 Receiver Group (Torn Tape)	Section 6A
AN/FGR-6A	Model 28 Monitor Group (Torn Tape)	Section 6A
AN/FGR-8	Model 28 Monitor Group (Torn Tape)	Section 6A
AN/FGR-9	Model 28 Receiver Group (Torn Tape)	Section 6A
AN/FGT-4	Model 28 Transmitter Group (Torn Tape)	Section 6A
AN/FGT-5	Model 28 Transmitter Distributor Set (For Torn Tape System)	Section 8A
AN/FGT-6	Model 28 Torn Tape Transmitter Group	Section 6A
AN/GGA-19	Teletype Assembled High Speed Tape Punch Set	Section 9A
AN/GGA-20	Teletype Model CX High Speed Tape Reader Set	Section 9B
AN/GGC-12	Model 28 Torn Tape Receiver Group	Section 6A
AN/GGR-1	Model 28 Receiver Group (Torn Tape)	Section 6A
AN/GGR-1A	Model 28 Receiver Group (Torn Tape)	Section 6A
AN/GGR-1X	Model 28 Receiver Group (Torn Tape)	Section 6A
AN/GGR-2	Model 28 Monitor Group (Torn Tape)	Section 6A
AN/GGR-2A	Model 28 Monitor Group (Torn Tape)	Section 6A
AN/GGR-2X	Model 28 Monitor Group (Torn Tape)	Section 6A
AN/GGT-3	Model 28 Transmitter Group (Torn Tape)	Section 6A
AN/GGT-3X	Model 28 Transmitter Group (Torn Tape)	Section 6A
AN/GGT-4	Model 28 Transmitter Group (Torn Tape)	Section 6A

AN/UGA-7	Model 28 Self-Contained Transmitter Distributor Set	Section 8A
AN/UGC-5B	Model 28 ASR Set	Section 1A
AN/UGC-5BX	Model 28 ASR Set	Section 1A
AN/UGC-5C	Model 28 ASR Set	Section 1A
AN/UGC-6J	Model 28 ASR Set	Section 1A
AN/UGC-6JX	Model 28 ASR Set	Section 1A
AN/UGC-6K	Model 28 ASR Set	Section 1A
AN/UGC-6L	Model 28 ASR Set	Section 1A
AN/UGC-6MY	Model 28 ASR Set	Section 1A
AN/UGC-6NX	Model 28 ASR Set	Section 1A
AN/UGC-13	Model 28 ASR Set	Section 1A
AN/UGC-13AX	Model 28 ASR Set	Section 1A
AN/UGC-13B	Model 28 ASR Set	Section 1A
AN/UGC-13BX	Model 28 ASR Set	Section 1A
AN/UGC-13C	Model 28 ASR Set	Section 1A
AN/UGC-13CX	Model 28 ASR Set	Section 1A
AN/UGC-13X	Model 28 ASR Set	Section 1A
AN/UGC-14	Model 28 Reperforator Transmitter Set	Section 7A
AN/UGC-17	Model 28 Reperforator Transmitter Set	Section 7A
AN/UGC-19	Model 28 Rack-Mounted Send- Receive Page Printer Set	Section 3A
AN/UGC-20B	Model 28 Compact Send-Receive Set	Section 3A
AN/UGC-22A	Model 28 Rack-Mounted KSR Set	Section 3A
AN/UGC-25A	Model 28 Receive-Only Compact Page Printer Set	Section 2A
AN/UGC-25AX	Model 28 Receive-Only Compact Page Printer Set	Section 2A
AN/UGC-31	Model 28 Reperforator Transmitter Distributor Set	Section 7A
AN/UGC-32	Model 28 ASR Set	Section 1A
AN/UGC-32X	Model 28 ASR Set	Section 1A
AN/UGC-32Y	Model 28 ASR Set	Section 1A
AN/UGC-34	Model 28 Send-Receive Page Printer Set	Section 3A
AN/UGC-35	Model 28 ASR Set	Section 1A
AN/UGC-37	Model 28 ASR Set	Section 1A
AN/UGC-44	Model 28 ASR Page Printer Set	Section 1A
AN/UGC-45	Model 28 Reperforator Transmitter Group	Section 7A
AN/UGC-47	Model 28 Low-Level KSR Set	Section 3B
AN/UGC-47X	Model 28 Low Level KSR Set	Section 3B
AN/UGC-48A	Model 28 Low Level ASR Set	Section 1B


AN/UGC-48BY	Model 28 Low Level ASR Set	Section 1B
AN/UGC-49	Model 28 Low Level ASR Set	Section 1B
AN/UGC-49X	Model 28 Low Level ASR Set	Section 1B
AN/UGC-50	Model 28 Low Level Receive-Only Set	Section 2B
AN/UGC-50AY	Model 28 Low Level Receive-Only Page Printer Set	Section 2B
AN/UGC-50X	Model 28 Low Level Receive-Only Page Printer Set	Section 2B
AN/UGC-50Y	Model 28 Low Level Receive-Only Page Printer Set	Section 2B
AN/UGC-51	Model 28 Low Level KSR Set	Section 3B
AN/UGC-51AY	Model 28 Low Level KSR Set	Section 3B
AN/UGC-51X	Model 28 Low Level KSR Set	Section 3B
AN/UGC-51Y	Model 28 Low Level KSR Set	Section 3B
AN/UGC-54	Model 28 Low Level ASR Set	Section 1B
AN/UGC-55	Model 28 Low Level Rack-Mounted KSR Set	Section 3B
AN/UGC-56	Model 28 Low Level Torn Tape Monitor Group	Section 6B
AN/UGC-57	Model 28 Low Level ASR Set	Section 1B
AN/UGC-58	Model 28 Low Level Receive-Only Set	Section 2B
AN/UGC-59	Model 28 ASR Page Printer Set	Section 1A
AN/UGC-59A	Model 35 ASR Page Printer Set	Section 1A
AN/UGC-60	Model 28 Low Level Floor Model KSR Set	Section 3B
AN/UGC-61	Model 28 Low Level Multiple Page Printer Monitor Console Set	Section 10B
AN/UGC-61A	Model 28 Low Level Multiple Page Printer Monitor Console Set	Section 10B
AN/UGC-61X	Model 28 Low Level Multiple Page Printer Monitor Console Set	Section 10B
AN/UGC-61Y	Model 28 Low Level Multiple Page Printer Monitor Console Set	Section 10B
AN/UGC-62	Model 28 ASR Set	Section 1A
AN/UGC-63	Model 28 Rack Mounted Send-Receive Page Printer Set	Section 3A
AN/UGC-64	Model 28 Receive-Only Reperforator Set	Section 5B
AN/UGC-65	Model 28 Universal Torn Tape Transmitting Group	Section 6A
AN/UGC-66	Model 28 Low Level Self-Contained Transmitter Distributor Set	Section 8A
AN/UGC-67	Model 28 ASR Set	Section 1A
AN/UGC-68	Model 28 Torn Tape Receiving Group	Section 6A
AN/UGC-69	Model 28 Table Mounted ASR Set	Section 1A
AN/UGC-70	Model 28 Receive-Only Typing Reperforator Set	Section 5A
AN/UGC-71	Model 28 Transmitter Distributor Set	Section 8A
AN/UGC-77	Model 28 Low Level Compact Send-Receive Page Printer Set	Section 3B

AN/UGC-78	Model 28 Low Level Table Model Sent-Receive Typing Reperforator Set	Section 4B
AN/UGC-79	Model 35 KSR Set	Section 3A
AN/UGC-87	Model 28 Low Level ASR Set	Section 1B
AN/UGC-88	Model 37 Low Level ASR Data Communications Terminal	Section 13B
AN/UGC-89	Model 37 Low Level KSR Data Communications Terminal	Section 13B
AN/UGC-90	Model 28 Low Level ASR Set	Section 1B
AN/UGC-90X	Model 28 Low Level ASR Set	Section 1B
AN/UGC-91	Model 28 Low Level Compact Send- Receive Page Printer Set	Section 3B
AN/UGC-92	Model 37 Low Level ASR Data Communications Terminal	Section 13B
AN/UGC-93	Model 37 Low Level KSR Data Communications Terminal	Section 13B
AN/UGR-2	Model 28 Miniaturized Receive- Only Typing Reperforator Set	Section 5A
AN/UGR-3	Model 28 Receive-Only Page Printer Set	Section 2A
AN/UGR-4	Model 28 Compact Receive-Only Set	Section 2A
AN/UGR-8	Model 28 Low Level Floor Model Receive-Only Set	Section 2B
AN/UGR-9	Model 28 Low Level Compact Receive-Only Page Printer Set	Section 2B
AN/UGR-9X	Model 28 Low Level Compact Receive-Only Page Printer Set	Section 2B
AN/UGR-10	Model 28 Low Level Receive-Only Multiple Page Printer Monitor Console Set	Section 10B
AN/UGR-10A	Model 28 Low Level Receive-Only Multiple Page Printer Monitor Console Set	Section 10B
AN/UGR-10X	Model 28 Low Level Receive-Only Multiple Page Printer Monitor Console Set	Section 10B
AN/UGR-11	Model 28 Low Level Torn Tape Monitor Group	Section 6B
AN/UGR-12	Model 28 Low Level Torn Tape Receiver Group	Section 6B
AN/UGR-13	Model 28 Low Level Torn Tape Monitor Group	Section 6B
AN/UGR-14	High Speed Inktronic Receive-Only Page Printer Set	Section 14A
AN/UGR-16	Model 28 Low Level Compact Receive- Only Page Printer	Section 2B
AN/UGT-4	Model 28 Low Level Torn Tape Transmitter Group	Section 6B
AN/UGT-4X	Model 28 Low Level Torn Tape Transmitter Group	Section 6B
AN/UGT-5	Model 28 Low Level Torn Tape Transmitter Group	Section 6B
AN/UGT-6	Model 28 Low Level Torn Tape Transmitter Group	Section 6B

AN/UGT-6A	Model 28 Low Level Torn Tape Transmitter Group	Section 6B
AN/UGT-7	Model 28 Low Level Torn Tape Transmitter Group	Section 6B
TS-2/TG	Teletype Signal Distortion Test Set	Section 11
TS-383A/GG	Teletype Signal Distortion Test Set	Section 11
TS-383B/GG	Teletype Signal Distortion Test Set	Section 11
TS-652/GG	Teletype Signal Distortion Test Set	Section 11
TS-658/UG	Teletype Signal Distortion Test Set	Section 11
TS-569/UG	Teletype Signal Distortion Test Set	Section 11
TT-47J/UG	Model 28 Send-Receive Page Printer Set	Section 3A
TT-47K/UG	Model 28 Send-Receive Page Printer Set	Section 3A
TT-47L/UG	Model 28 Send-Receive Page Printer Set	Section 3A
TT-48F/UG	Model 28 Send-Receive Page Printer Set	Section 3A
TT-48G/UG	Model 28 Keyboard Send-Receive Set	Section 3A
TT-48J/UG	Model 28 Send-Receive Page Printer Set	Section 3A
TT-48K/UG	Model 28 KSR Page Printer Set	Section 3A
TT-69E/UG	Model 28 Send-Receive Page Printer Set	Section 3A
TT-69G/UG	Model 28 KSR Page Printer Set	Section 3A
TT-70E/UG	Model 28 Send-Receive Page Printer Set	Section 3A
TT-128C/UG	Model 28 Send-Receive Page Printer Set	Section 3A
TT-130C/UG	Model 28 Send-Receive Page Printer Set	Section 3A
TT-171C/UG	Model 28 Receive-Only Page Printer Set	Section 2A
TT-176B/UG	Model 28 Send-Receive Page Printer Set	Section 3A
TT-176C/UG	Model 28 Rack-Mounted Send-Receive Page Printer Set	Section 3A
TT-187/UG	Model 28 Transmitter Distributor Set	Section 8A
TT-187A/UG	Model 28 Miniaturized Transmitter Distributor Set	Section 8A
TT-187B/UG	Model 28 Miniaturized Transmitter Distributor Set	Section 8A
TT-187C/UG	Model 28 Miniaturized Transmitter Distributor Set	Section 8A
TT-187E/UG	Model 28 Transmitter Distributor Set	Section 8A

TT-192C/UG	Model 28 Compact Receive-Only Typing Reperforator Set	Section 5A
TT-234/SGA-3	Model 28 Send-Receive Page Printer Set	Section 3A
TT-243/FG	Model 28 Send-Receive Page Printer Set	Section 3A
TT-247/FG	Model 28 Send-Receive Page Printer Set	Section 3A
TT-253A/UG	Model 28 Send-Receive Typing Reperforator Set	Section 4A
TT-253C/UG	Model 28 Send-Receive Typing Reperforator Set	Section 4A
TT-273/UG	Model 28 Transmitter Distributor Set	Section 8A
TT-273A/UG	Model 28 Transmitter Distributor Set	Section 8A
TT-274B/UG	Model 28 Self-Contained Receive-Only Typing Reperforator Set	Section 5A
TT-283A/UG	Model 28 Receive-Only Page Printer Set	Section 2A
TT-292A/UG	Model 28 Send-Receive Typing Reperforator Set	Section 4A
TT-306A/UG	Model 28 Rack-Mounted Receive-Only Page Printer Set	Section 2A
TT-306B/UG	Model 28 Receive-Only Set	Section 2A
TT-307A/UG	Model 28 Rack-Mounted Send-Receive Page Printer Set	Section 3A
TT-307B/UG	Model 28 Send-Receive Set	Section 3A
TT-308B/UG	Model 28 Torn Tape Receiver Group	Section 6A
TT-308A/UG	Model 28 Torn Tape Receiver Group	Section 6A
TT-308X/UG	Model 28 Torn Tape Receiver Group	Section 6A
TT-309/UG	Model 28 Torn Tape Monitor Group	Section 6A
TT-309A/UG	Model 28 Torn Tape Monitor Group	Section 6A
TT-310/UG	Model 28 Torn Tape Transmitter Group	Section 6A
TT-310A/UG	Model 28 Torn Tape Transmitter Group	Section 6A
TT-329/UG	Teletype Assembled High Speed Tape Punch Set	Section 9A
TT-331A/UG	Model 28 Universal Torn Tape Receiver Group	Section 6A
TT-332A/UG	Model 28 Universal Torn Tape Monitor Group	Section 6A
TT-333A/UG	Model 28 Universal Torn Tape Transmitter Group	Section 6A
TT-340B/UG	Model 28 Rack Mounted Receive-Only Page Printer Set	Section 2A
TT-341A/UG	Model 28 Rack Mounted Send-Receive Page Printer Set	Section 3A
TT-341B/UG	Model 28 Send-Receive Rack-Mounted Page Printer Set	Section 3A
TT-341C/UG	Model 28 Rack-Mounted Send-Receive Page Printer Set	Section 3A

TT-350/UG	Teletype Assembled High Speed Tape Punch Set	Section 9A
TT-403A/UG	Model 28 Universal Torn Tape Receiver Group	Section 6A
TT-404A/UG	Model 28 Universal Torn Tape Monitor Group	Section 6A
TT-405A/UG	Model 28 Universal Torn Tape Transmitter Group	Section 6A
TT-461/UG	Model 28 Torn Tape Monitor Transmitter Group (Pull Back)	Section 6A
TT-461A/UG	Model 28 Torn Tape Monitor Transmitter Group	Section 6A
TT-462/UG	Model 28 Torn Tape Monitor Transmitter Group (Pull Back)	Section 6A
TT-462A/UG	Model 28 Torn Tape Monitor Transmitter Group	Section 6A
TT-463/UG	Model CX High Speed Tape Reader Set	Section 9B
TT-509/UG	Model 28 Assembled High Speed Tape Punch Set	Section 9A
TT-525/UG	Model 28 Receive-Only Set	Section 2A
TT-525X/UG	Model 28 Receive-Only Set	Section 2A
TT-553/UG	Model 28 Self-Contained Transmitter Distributor Set	Section 8A
TT-556/UG	Model 28 Torn Tape Transmitter Group	Section 6A
TT-570/UG	Model 28 Low Level Miniaturized Transmitter Distributor Set	Section 8B
TT-571/UG	Model 28 Low Level Receive-Only Typing Reperforator Set	Section 5B
TT-575/UG	Teletype Assembled High Speed Tape Punch Set	Section 9A
TT-576/UG	Model 28 Low Level Torn Tape Receiver Group	Section 6B
TT-576A/UG	Model 28 Low Level Torn Tape Receiver Group	Section 6B
TT-577/UG	Model 28 Low Level Torn Tape Monitor Group	Section 6B
TT-578/UG	Model 28 Low Level Torn Tape Receiver Group	Section 6B
TT-579/UG	Model 28 Low Level Torn Tape Monitor Group	Section 6B
TT-583/UG	Model 28 Rack Mounted Receive- Only Page Printer Set	Section 2A
TT-584/UG	Model 28 Receive-Only Set	Section 2A
TT-603/UG	Model 28 Low Level Miniaturized Transmitter Distributor Set	Section 8B
TT-605/UG	Model 28 Low Level Miniaturized Receive-Only Typing Reperforator Set	Section 5B
	Teletype Low Level Signal Modification Kits	Section 12

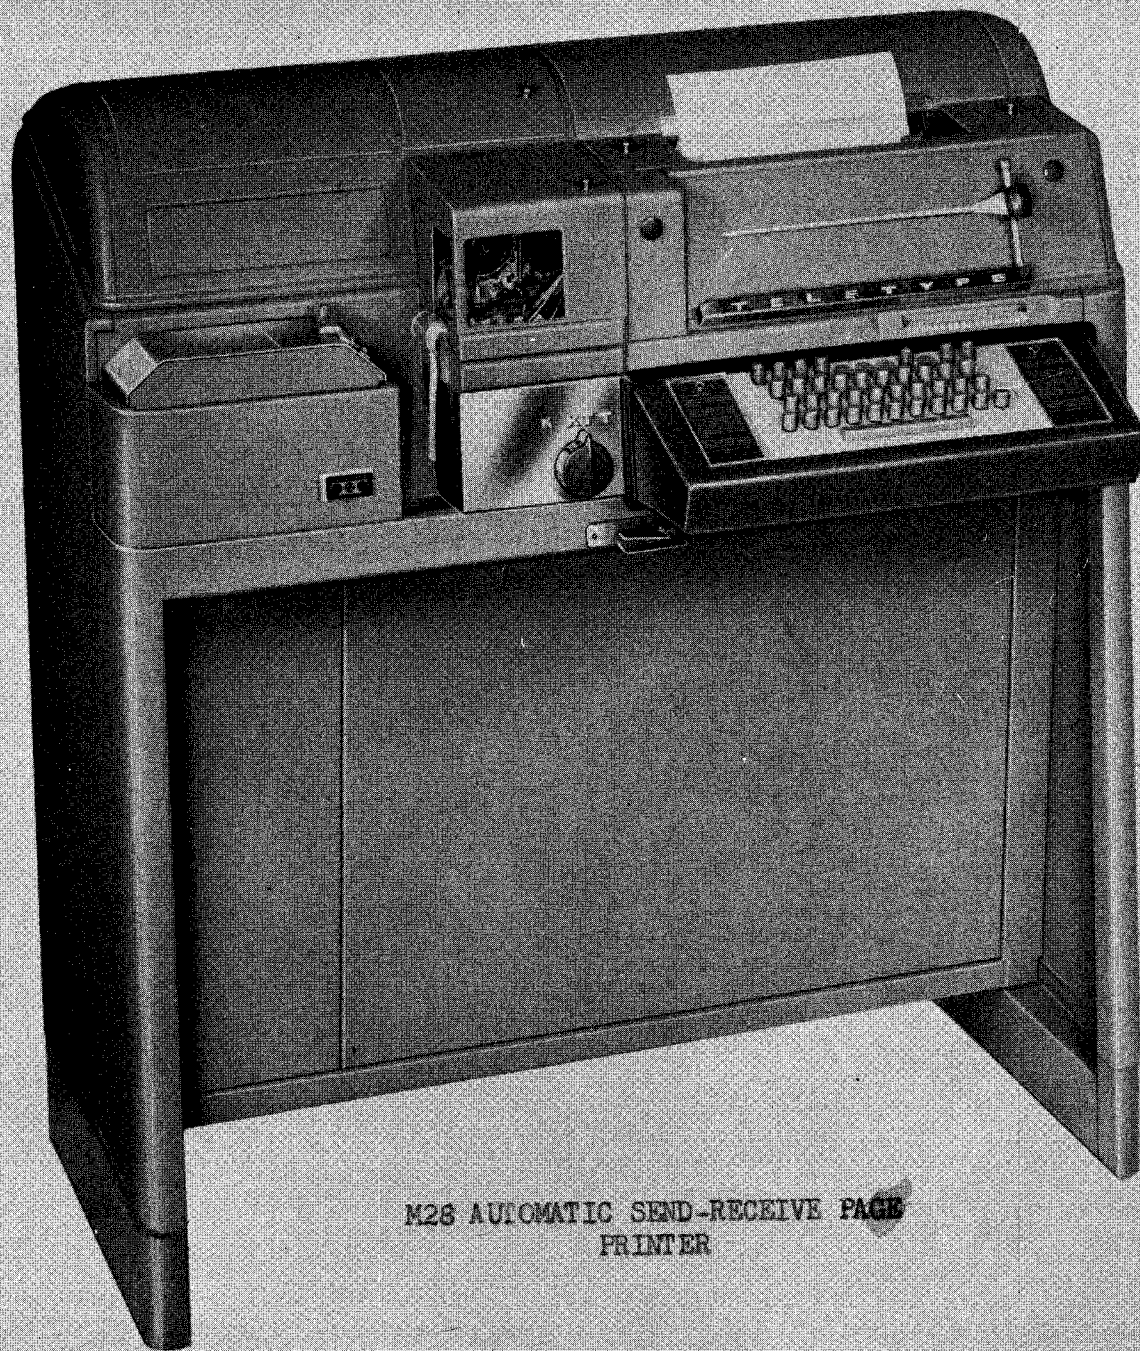

M28 AUTOMATIC SEND-RECEIVE PAGE
PRINTER

630819-19

April 1, 1968

AN/FGC-56

TELETYPE MODEL 28 ASR SET

LP59WY/AFK	TYPING UNIT
LAAC214BR	CABINET
160887BR	TD HOUSING
LXD7	TRANSMITTER DISTRIBUTOR
317220	LINE RELAY
LCXB8	BASE
LESU37	ELECTRICAL SERVICE UNIT
LAK11BRE/ LTPE1AWA	KEYBOARD WITH TYPING PERFORATOR
LMU12	MOTOR UNIT
161859	SET OF GEARS (60 WPM)
161860	SET OF GEARS (75 WPM)
161861	SET OF GEARS (100 WPM)

RUNNING SPARES

151982	LAMP (INCANDESCENT)
317220	LINE RELAY
(3) 7835	RIBBON
(4) 148140	PAPER (SINGLE ROLL)
(2) 80322	PAPER (PERFORATOR)
(5) 162360	FUSE
(3) 161136	FUSE

7.42 UNIT CODE
SYNCHRONOUS MOTOR
WIRED FOR POLAR OPERATION
SELECTIVE CALLING

April 1, 1968

AN/FGC-56X

TELETYPE CORPORATION MODEL 28 ASR
SEND-RECEIVE SET

SAME AS AN/FGC-56 EXCEPT:

WITH SERIES GOVERNED MOTOR

April 1, 1968

AN/FGC-58

TELETYPE MODEL 28 ASR SET

	LP59WY/AFK	TYPING UNIT
	LPR15AWA	TYPING REPERFORATOR
	LRB20	BASE
	LMU3	MOTOR UNIT
	LESU12	ELECTRICAL SERVICE UNIT
(2)	317220	LINE RELAY
	161829	SET OF PARTS FOR LESU MOUNTING
	161815	SET OF PARTS FOR TAPE HANDLING
	162477	CONTROL PANEL
	LAAC214BR	CABINET
	160887BR	TD HOUSING
	LXD7	TRANSMITTER DISTRIBUTOR
	LCXB8	BASE
	LESU37	ELECTRICAL SERVICE UNIT
	LAK11BRE/LTPE1AWA	KEYBOARD WITH TYPING
		PERFORATOR
	LMU12	MOTOR UNIT
	161859	SET OF GEARS (60 WPM)
	161860	SET OF GEARS (75 WPM)
	161861	SET OF GEARS (100 WPM)

RUNNING SPARES

(5)	129919	FUSE
(1)	151982	LAMP (INCANDESCENT)
(1)	317220	LINE RELAY
(3)	7835	RIBBON
(4)	148140	PAPER (SINGLE ROLL)
(4)	80322	PAPER (PERFORATOR)

7.42 UNIT CODE
SYNCHRONOUS MOTORS
WIRED FOR POLAR OPERATION
SELECTIVE CALLING

April 1, 1968

AN/FGC-58X

TELETYPE CORPORATION MODEL 28 ASR
SEND-RECEIVE SET

SAME AS AN/FGC-58 EXCEPT:

WITH SERIES GOVERNED MOTOR

April 1, 1968

AN/UGC-5B

TELETYPE MODEL 28 ASR SET

*LAAC200BR	Cabinet	CY-2529/UG
LP14WY/AJG	Typing Unit	TT-437/UG
*LAK42BRJ	Keyboard	TT-433/UG
*LTPE1AWA	Typing Reperforator	TT-252/UG
*LXD27	Transmitter Distributor	TT-439/UG
*LESU111	Electrical Service Unit	SB-2680/UG
*LMU12	Motor Unit	PD-67/U
*LCXB1	Base	MT-2099/UG
164024BR	Copy Holder	
*179473	Immobilization Set of Parts	
161859	Set of Gears (60 WPM)	
163300	Set of Gears (67 WPM)	
*161861	Set of Gears (100 WPM)	

*Assembled - one set assembled depending on customer's requirements

Same as AN/UGC-5 except included stepping magnets in keyboard
and transmitter distributor
Automatic line feed function

April 1, 1968

AN/UGC-5BX

TELETYPE MODEL 28 ASR SET

LP14WY/AJG	Typing Unit	TT-437/UG
LAK42BRJ	Keyboard	TT-433/UG
LTPE1AWA	Typing Perforator	TT-252/UG
LXD27	Transmitter Distributor	TT-439/UG
LESU111	Electrical Service Unit	SB-2680/UG
LMU39	Motor Unit	PD-77A/U
104986	Speed Indicator	
LAAC200BR	Cabinet	CY-2529/UG
LCXB1	Base	
164024BR	Copyholder	
161859	Gear Set (45.5 Baud)	
163300	Gear Set (50 Baud)	
161861	Gear Set (74.2 Baud)	

7.42 Unit code
50/60 Series governed motor
Stepping magnets in keyboard and transmitter distributor
Automatic line feed function

January 5, 1970

AN/UGC-5C

TELETYPE MODEL 28 ASR SET

LP14WY/AJG	Typing Unit
*LAK42BRJ/ LTPE1AWA	Keyboard with Typing Perforator
*LXD27	Transmitter Distributor
*LCXB1	Transmitter Distributor Base
*LESU111	Electrical Service Unit
*LMU12	Motor Unit
*LAAC200BR	Cabinet
161859	Gear Set (45.5 Baud)
163300	Gear Set (50 Baud)
*161861	Gear Set (. . 2 Baud)
164024BR	Copy Holder
LPW300BR	Paper Winder
193950	Copy Display Rack
*179473	Immob. Set of Parts

*Assembled - one set assembled depending on customer's requirements

7.42 Unit code
60 cycle synchronous motor
With stepping feature

January 5, 1970

AN/UGC-6J

TELETYPE MODEL 28 ASR SET

LP14WY/AJG	Typing Unit	TT-437/UG
LESU111	Electrical Service Unit	SB-2680/UG
LAK42BRJ	Keyboard	TT-433/UG
LPFELAWA	Typing Perforator	TT-252/UG
LCXB1	Base	MT-2099/UG
LXD27	Transmitter Distributor	TT-439/UG
164024BR	Copy Holder	
LAAC200BR	Cabinet	CY-2529/UG
161859	Set of Gears (45.5 Baud)	
163300	Set of Gears (50.0 Baud)	
161861	Set of Gears (74.2 Baud)	
LMU12	Motor Unit	PD-67/U
LPR9AWA	Typing Reperforator	TT-266/UG
LRB36	Base	MT-2625/UG
LESU96	Electrical Service Unit	SB-2611/UG
160387	Modification Kit	
LMU3	Motor Unit	
161815	Modification Kit	
161829	Modification Kit	
179473	Immobilization Set of Parts	
LPW300BR	Paper Winder	RL-235/UG
193950	Copy Display Rack	

7.42 Unit code
With stepping magnet feature
60 cycle synchronous motor

January 5, 1970

AN/UGC-6JX

TELETYPE MODEL 28 ASR SET

LP14WY/AJG	Typing Unit	TT-437/UG
LESU111	Electrical Service Unit	SB-2680/UG
LAK42BRJ	Keyboard	TT-433/UG
LTPE1AWA	Typing Perforator	TT-252/UG
LCXB1	Base	MT-2099/UG
LXD27	Transmitter Distributor	TT-439/UG
LAAC200BR	Cabinet	CY-2529/UG
164024BR	Copy Holder	
161859	Set of Gears (45.5 Baud)	
163300	Set of Gears (50.0 Baud)	
161861	Set of Gears (74.2 Baud)	
LMU39	Motor Unit	PD-77A/U
LRB36	Base	MT-2625/UGC-6C
LPR9AWA	Typing Reperforator	TT-266/UG
LESU96	Electrical Service Unit	SB-2611/UG
160387	Modification Kit	
LMU41	Motor Unit	PD-18A/U
161829	Modification Kit	
161815	Modification Kit	
LPW300BR	Paper Winder	RL-235/UG
193950	Copy Display Rack	
179473	Immobilization Set of Parts	
104986	Speed Indicator	

Set same as AN/UGC-6J except includes series governed motors
in place of synchronous motors

January 5, 1970

AN/UGC-6K

TELETYPE MODEL 28 ASR SET

LPL4WY/AJG	Typing Unit	TT-437/UG
* LESU111	Electrical Service Unit	SB-2680/UG
* LAK42BRJ	Keyboard	TT-433/UG
* LTPELAWA	Typing Perforator	TT-252/UG
* LCXB1	Base	MT-2099/UG
* LXD27	Transmitter Distributor	TT-439/UG
164024BR	Copy Holder	
* LAAC200BR	Cabinet	CY-2529/UG
161859	Gear Set (45.5 Baud)	
163300	Gear Set (50 Baud)	
* 161861	Gear Set (74.2 Baud)	
* LMU12	Motor Unit	PD-67/U
LPR9AWA	Typing Reperforator	TT-266/UG
* LRB36	Base	MT-2625/UG
* LESU96	Electrical Service Unit	SB-2611/UG
* 160387	Modification Kit	
* LMU3	Motor Unit	PD-17A/U
* 161829	Modification Kit	
* 161815	Modification Kit	
* 179473	Immobilization Set of Parts	

* Assembled - one set assembled depending on customer's requirements

7.42 Unit code
With stepping magnet feature
60 cycle synchronous motor
Auto-line feed feature

January 5, 1970

AN/UGC-6L

TELETYPE MODEL 28 ASR SET

LPL4WY/AJE	Typing Unit	TT-436/UG
LESU111	Electrical Service Unit	SB-2680/UG
LAK42BRJ	Keyboard	TT-433/UG
LTPELAWA	Typing Perforator	TT-252/UG
LCXB1	Base	MT-2099/UG
LXD27	Transmitter Distributor	TT-439/UG
164024BR	Copy Holder	
LAAC200BR	Cabinet	CY-2529/UG
161859	Gear Set (45.5 Baud)	
163300	Gear Set (50 Baud)	
161861	Gear Set (74.2 Baud)	
LMU12	Motor Unit	PD-67/U
LPR9AWA	Typing Reperforator	TT-266/UG
LRB36	Base	MT-2625/UG
LESU96	Electrical Service Unit	SB-2611/UG
160387	Modification Kit	
LMU3	Motor Unit	PD-17A/U
161829	Modification Kit	
161815	Modification Kit	
179473	Immobilization Set of Parts	

Same as AN/UGC-6K except Reperforator Control

MODEL 28 AUTOMATIC SEND-RECEIVE SET

LPI4WY/AJE	Typing Unit	TT-436/UG
LESU111	Electrical Service Unit	SB-2680/UG
LAK42BRJ	Keyboard	TT-433/UG
ITPE1AWA	Typing Perforator	TT-252/UG
L CXB1	Transmitter Distributor Base	MT-2099/UG
LXD27	Transmitter Distributor	TT-439/UG
164024BR	Copy Holder	
LAAC200BR	Cabinet	CY-2529/UG
159660	Gear Set 45.5 Baud	
159667	Gear Set 50 Baud	
159700	Gear Set 74.2 Baud	
305579	Gear Set 45.5 Baud	
305578	Gear Set 50 Baud	
305577	Gear Set 74.2 Baud	
LMU50	Motor Unit	FD-111/UG
LPR9AWA	Typing Reperforator	TT-266/UG
LRB51	Base	MT-3369/UG
LESU96	Electrical Service Unit	SB-2611/UG
160387	Modification Kit	
LMU38	Motor Unit	FD-108/UG
161829	Modification Kit	
161815	Modification Kit	
LFW300BR	Paper Winder	RL-235/UG
193950	Copy Display Rack	
179473	Immobilization Set of Parts	

7.42 Unit code
With stepping feature
50 cycle synchronous motor
Reperforator control

April 1, 1968

EXHIBIT

AN/UGC-6NX

TELETYPE CORPORATION MODEL 28 ASSEMBLED AUTOMATIC
SEND-RECEIVE SET C/O:

LP14WY/AJF	Typing Unit
LESU111	Electrical Service Unit
LAK42BRJ/LTPE1AWA	Keyboard with Typing Perforator
LCXB1	Base
LXD27	Transmitter Distributor
LAAC200BR	Cabinet
164024BR	Copyholder
161859	Set of Gears (45.5 Baud)
163300	Set of Gears (50.0 Baud)
161861	Set of Gears (74.2 Baud)
LMU39	Motor Unit
LRB36	Base
LPR9AWA	Typing Reperforator
LESU96	Electrical Service Unit
160387	Modification Kit
LMU41	Motor Unit
161829	Modification Kit
161815	Modification Kit
LPW300BR	Paper Winder
193950	Copy Display Rack
179473	Immobilization Set of Parts
104986	Speed Indicator Assembled

Set same as AN/UGC-6J except includes series-governed motors in place of synchronous motors.

January 5, 1970

AN/UGC-13

TELETYPE CORPORATION MODEL 28 ASR SET

*LRB32	BASE	MT-2422/UG
*LAAC229BR	CABINET	CY-3062/UG
*LXD11	TRANSMITTER DISTRIBUTOR	TT-311/UG
*LCXB13	TRANSMITTER DISTRIBUTOR BASE	MT-2452/UG
*LAK21BSS/LPR36BRP	KEYBOARD W/TYPING REPERFORATOR	MX-3312/UG--TT-316/UG
*LMU12	MOTOR UNIT	PD-67/U
LP77BG/AGM	TYPING UNIT	MX-3311/UG
LPR35BRP	TYPING REPERFORATOR	TT-315/UG
*LMU3	MOTOR UNIT	PD-17A/U
*173824	ELECTRICAL SERVICE ASSEMBLY	SB-1227/UG
*163502	SET OF GEARS (75 BAUD - LPR)	
*163505	SET OF GEARS (75 BAUD - LP)	
*163454	SET OF GEARS (75 BAUD - LXD)	
*173706	MODIFICATION KIT	
*173707	MODIFICATION KIT	
*163451	SET OF GEARS (75 BAUD FOR AUXILIARY REPERFORATOR)	
*176287	MODIFICATION KIT	
*173778	MODIFICATION KIT	
*160887BR	TD HOUSING	
154754BR	SUB-BASE	
*179473	IMMOBILIZATION SET OF PARTS	

* ASSEMBLED - ONE SET ASSEMBLED DEPENDING ON CUSTOMER REQUISITION

45.5 BAUD GEARS FOR AN/UGC-13

173795	SET OF GEARS (45.5 BAUD - LP)
173776	SET OF GEARS (45.5 BAUD - LXD)
173992	SET OF GEARS (45.5 BAUD - LPR)
173820	SET OF GEARS (45.5 BAUD FOR AUXILIARY REPERFORATOR)

50 BAUD GEARS FOR AN/UGC-13

163504	SET OF GEARS FOR LP
163499	SET OF GEARS FOR LXD
163457	SET OF GEARS FOR LPR
163448	SET OF GEARS FOR AUXILIARY LPR

7.00 UNIT CODE
SYNCHRONOUS MOTOR
AUXILIARY REPERFORATOR
CRITICOM TYPE

January 5, 1970

AN/UGC-13AX

TELETYPE CORPORATION MODEL 28 ASR SET

*LRB32	BASE	MT-2422/UG
*LAAC229BR	CABINET	CY-3062/UG
*LXD11	TRANSMITTER DISTRIBUTOR	TT-311/UG
*LCXB13	TRANSMITTER DISTRIBUTOR BASE	TT-2452/UG
*LAK21BSS/LPR36BRP	KEYBOARD W/TYPING REPERFORATOR	MX-3312/UG--TT-316/UG
*LMU39	MOTOR UNIT	PD-77A/U
LP77BG/AGM	TYPING UNIT	MX-3311/UG
LPR35BRP	TYPING REPERFORATOR	TT-315/UG
*LMU41	MOTOR UNIT	PD-18A/U
*173824	ELECTRICAL SERVICE UNIT	SB-1227/UG
*163502	SET OF GEARS (75 BAUD-LPR)	
*163505	SET OF GEARS (75 BAUD-LP)	
*163454	SET OF GEARS (75 BAUD-LXD)	
*173706	MODIFICATION KIT	
*173707	MODIFICATION KIT	
*163451	SET OF GEARS (75 BAUD FOR AUXILIARY REPERFORATOR)	
*176287	MODIFICATION KIT	
*173778	MODIFICATION KIT	
*160887BR	TD HOUSING	
154754BR	SUB-BASE	
*179473	IMMOBILIZATION SET OF PARTS	

45.5 BAUD GEARS FOR AN/UGC-13AX

173795	SET OF GEARS (45.5 BAUD - LP)
173766	SET OF GEARS (45.5 BAUD - LXD)
173992	SET OF GEARS (45.5 BAUD - LPR)
173820	SET OF GEARS (45.5 BAUD FOR AUXILIARY REPERFORATOR)

*ASSEMBLED - ONE SET ASSEMBLED DEPENDING ON CUSTOMER REQUISITION

SET SAME AS AN/UGC-13 EXCEPT CONTAINS SERIES GOVERNED MOTORS

April 1, 1968

AN/UGC-13B

TELETYPE MODEL 28 ASR SET

LRB32	Base	MT-2422/UG
LAAC229BR	Cabinet	CY-3062/UG
LXD29	Transmitter Distributor	TT-502/UG
LAK45BRW	Keyboard	TT-508/UG
LPR57BRP	Typing Reperforator	TT-492/UG
LMU12	Motor Unit	PD-67/U
LCXB13	Base	MT-2452/UG
LP77YD/AGM	Typing Unit	MX-3311/UG
LPR35BRP	Typing Reperforator	TT-315/UG
LMU3	Motor Unit	PD-17A/U
310183	Electrical Service Assembly	SB-2629/UG
163502	Set of Gears (75 Baud - LPR)	
163505	Set of Gears (75 Baud - LP)	
163454	Set of Gears (75 Baud - LXD)	
173706	Modification Kit	
173707	Modification Kit	
163451	Set of Gears (75 Baud for Auxiliary Reperforator)	
176287	Modification Kit	
173778	Modification Kit	
160887BR	TD Housing	
154754BR	Sub-Base	

Set same as AN/UGC-13 except:

Gold plated contacts in keyboard and transmitter distributor
Two tube drivers in electrical service assembly replacing the
one tube driver
Gold plated contacts in stepping switch and numbering modules

April 1, 1968

AN/UGC-13BX

TELETYPE MODEL 28 ASR SET

LAAC229BR	Cabinet	CY-3062/UG
LRB32	Base	MT-2422/UG
LXD11	Transmitter Distributor	TT-311/UG
LAK33BRW/LPR57BRP	Keyboard Reperforator	TT-492/UG
LMU39	Motor	PD-17A/U
LMU41	Motor	PD-18A/U
104986	Tuning Fork	
173824	Panel, Power Distributor	SB-1227/UG
LP77YD/AGM	Typing Unit	MX-3311/UG
163502	Gear Set (75 Baud - LPR)	
163505	Gear Set (75 Baud - LP)	
163454	Gear Set (75 Baud - LXD)	
163451	Gear Set (75 Baud - LPR)	
160887BR	Transmitter Distributor Housing	
LPR35BRP	Typing Reperforator	TT-494/GGR-1
173778	Modification Kit	
154754BR	Sub-Base	
176287	Modification Kit	
LCXB13	Base	MT-2452/UG

Same as AN/UGC-13AX except uses 4-point motor terminal block and backspace switch with backspace feature in reperforator on keyboard.

September 15, 1969

AN/UGC-13C

TELETYPE CORPORATION UNASSEMBLED
MODEL 28 ASR SET
CONSISTING OF:

LRB32	BASE
LAAC229BR	CABINET
LXD11	TRANSMITTER DISTRIBUTOR
LAK21BRW/LPR36BRP	KEYBOARD W/TYPING REPERFORATOR
LMU3	MOTOR UNIT
LP77YD/AGM	TYPING UNIT
LPR35BRP	TYPING REPERFORATOR
LMU12	MOTOR UNIT
173824	ELECTRICAL SERVICE ASSEMBLY
163502	GEAR SET
163505	GEAR SET
173706	MODIFICATION KIT
173707	MODIFICATION KIT
163451	GEAR SET
176287	MODIFICATION KIT
173778	MODIFICATION KIT
160887BR	TRANSMITTER DISTRIBUTOR HOUSING
154754BR	SUB-BASE

VCL296BR CONSISTING OF:

LCXB22	TRANSMITTER DISTRIBUTOR BASE
LXD29	TRANSMITTER DISTRIBUTOR
LD20	DISTRIBUTOR
317207	SET OF PARTS

7.00 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR

INCLUDES TANDEM MESSAGE IDENTIFICATION NUMBERING FEATURE
CRITICOM TYPE

September 15, 1969

AN/UGC-13CX

TELETYPE CORPORATION UNASSEMBLED
MODEL 28 ASR SET
CONSISTING OF:

LRB32	BASE
LAAC229BR	CABINET
LXD11	TRANSMITTER DISTRIBUTOR
LAK21BRW/LPR36BRP	KEYBOARD W/TYPING REPERFORATOR
LMU39	MOTOR UNIT
LP77YD/AGM	TYPING UNIT
LPR35BRP	TYPING REPERFORATOR
LMU41	MOTOR UNIT
173824	ELECTRICAL SERVICE ASSEMBLY
163502	GEAR SET
163505	GEAR SET
173706	MODIFICATION KIT
173707	MODIFICATION KIT
163451	GEAR SET
176287	MODIFICATION KIT
173778	MODIFICATION KIT
160887BR	TRANSMITTER DISTRIBUTOR HOUSING
154754BR	SUB-BASE

VCL296BR CONSISTING OF:

LCXB22	TRANSMITTER DISTRIBUTOR BASE
LXD29	TRANSMITTER DISTRIBUTOR
LD20	DISTRIBUTOR
317207	SET OF PARTS

7.00 UNIT CODE
50/60 SERIES GOVERNED MOTOR

INCLUDES TANDEM MESSAGE IDENTIFICATION NUMBERING FEATURE
CRITICOM TYPE

April 1, 1968

AN/UGC-13X

TELETYPE CORPORATION MODEL 28 ASR
SEND-RECEIVE SET

WITH AUXILIARY REPERFORATOR

SAME AS AN/UGC-13 EXCEPT:

WITH SERIES GOVERNED MOTOR

LMU39	MOTOR UNIT	PD-77A/U
-------	------------	----------

LMU41	MOTOR UNIT	PD-18A/U
-------	------------	----------

April 1, 1968

AN/UGC-32

TELETYPE MODEL 28 ASR SET

LRB32	Base	
LAAC229BR	Cabinet	
LXD31	Transmitter Distributor	
LCXB13	Transmitter Distributor Base	
LAK47BRW	Keyboard	MX-6934/UGC-32
LPR57BRP	Typing Reperforator	TT-492/UGC-32
LMU12	Motor Unit	
LP77YD/AJV	Typing Unit	MX-6933/UG
LPR35BRP	Typing Reperforator	
LMU3	Motor Unit	
163502	Gears 75 Baud for LPR	
163505	Gears 75 Baud for LP	
163454	Gears 75 Baud for LXD	
173706	Modification Kit for LMU12	
173707	Modification Kit for LMU3	
163451	Gears 75 Baud for Aux. LPR	
176287	Modification Kit	
173778	Modification Kit	
160887BR	Transmitter Distributor Housing	
154754BR	Sub-Base	
304203	Electrical Service Unit	
173795	Gears 45.5 Baud for LP	
173776	Gears 45.5 Baud for LXD	
173992	Gears 45.5 Baud for LPR	
173820	Gears 45.5 Baud for LPR	

Similar to AN/UGC-13

7.00 Unit Code
60 cycle synchronous motor
Polar operation negative mark
Transmitter Distributor single contact W/RF filtering and
shielded leads

April 1, 1968

AN/UGC-32X

TELETYPE MODEL 28 ASR SET

LAAC229BR	Cabinet	CY-3062/UG
LRB32	Base	MT-2422/UG
LXD31	Transmitter Distributor	TT-496/GG
LCXB13	Base	MT-2452/UG
LAK47BRW	Keyboard	MX-6934/UG
LPR57BRP	Typing Unit	TT-492/UG
LMU39	Motor	PD-77A/U
LP77YD/AJV	Typing Unit	MX-6933/UG
LPR35BRP	Typing Reperforator	TT-494/GG
LMU41	Motor	PD-18A/U
163502	Gear (75 Baud - LPR)	
163505	Gear (75 Baud - LP)	
163454	Gear (75 Baud - LXD)	
163451	Gear (75 Baud - LPR)	
176287	Modification Kit	
173778	Modification Kit	
160887BR	Transmitter Distributor Housing	
154754BR	Subbase	
104986	Tuning Fork	
304203	Service Assembly	
173795	Gear Set (45.5 Baud - LP)	
173776	Gear Set (45.5 Baud - LXD)	
173992	Gear Set (45.5 Baud - LPR)	
173820	Gear Set (45.5 Baud - LPR)	

Same as AN/UGC-32 except two series governed motors instead of synchronous.

April 1, 1968

AN/UGC-32Y

TELETYPE MODEL 28 ASR SET

LRB32	Base	MT-2422/UG
LAAC229BR	Cabinet	CY-3062/UG
LXD31	Transmitter Distributor	TT-496/GG
LCXB13	Transmitter Distributor Base	MT-2452/UG
LAK47BRW	Keyboard	MX-6934/UG
LPR57BRP	Typing Reperforator	TT-492/UG
LMU50	Motor Unit	PD-111/UG
LP77YD/AJV	Typing Unit	MX-6933/UG
LPR35BRP	Typing Reperforator	TT-494/GG
LMU38	Motor Unit	
173706	Set of Parts	
173707	Set of Parts	
176287	Set of Parts	
173778	Set of Parts	
160887BR	Transmitter Distributor Housing	
154754BR	Sub-Base	
304203	Service Assembly	
319902	Gear Set (45.5 Baud)	
319920	Gear Set (45.5 Baud)	
319911	Gear Set (45.5 Baud)	
312207	Gear Set (45.5 Baud)	
319923	Gear Set (50 Baud)	
319914	Gear Set (50 Baud)	
319905	Gear Set (50 Baud)	
312706	Gear Set (50 Baud)	
319908	Gear Set (75 Baud)	
319926	Gear Set (75 Baud)	
319917	Gear Set (75 Baud)	
312705	Gear Set (75 Baud)	

Same as AN/UGC-32 except uses LMU50 and LMU38 instead of LMU12 and LMU3.

7.00 Unit Code

April 1, 1968

AN/UGC-35

TELETYPE MODEL 28 ASR SET

LRB32	Base	MT-2422/UG
LAAC229BR	Cabinet	CY-3062/UG
LXD29	Transmitter Distributor	TT-502/UG
LAK45ARE	Keyboard	TT-504/UG
LPR57ARE	Typing Reperforator	TT-505/UG
LMU12	Motor Unit	PD-67/U
LCXB13	Base	MT-2452/UG
LP77RE/AGM	Typing Unit	TT-506/UG
LPR35ARE	Typing Reperforator	TT-507/UG
LMU3	Motor Unit	PD-17A/U
310183	Electrical Service Assembly	SB-2629/UG
163502	Set of Gears (75 Baud - LPR)	
163505	Set of Gears (75 Baud - LP)	
163454	Set of Gears (75 Baud - LXD)	
163451	Set of Gears (75 Baud for Auxiliary Reperforator)	
173706	Modification Kit	
173707	Modification Kit	
176287	Modification Kit	
173778	Modification Kit	
160887BR	TD Housing	
154754BR	Sub-Base	

Set same as AN/UGC-13B except includes weather character arrangements

April 1, 1968

AN/UGC-37

TELETYPE MODEL 28 ASR SET

LRB32	BASE	
LAAC229BR	CABINET	
LXD31	TRANSMITTER DISTRIBUTOR	
LCXB13	BASE	
LAK47ARE/	KEYBOARD	MX-7180/UGC
LPR57BRH	TYPING REPERF.	TT-510/UGC
LMU12	MOTOR UNIT	
LP77RE/AJV	TYPING UNIT	MX-7181/UGC
LMU3	MOTOR UNIT	
163502	GEAR SET (75 BAUD LPR)	
163505	GEAR SET (75 BAUD LP)	
163454	GEAR SET (75 BAUD LXD)	
173706	MODIFICATION KIT - LMU12	
173707	MODIFICATION KIT - LMU3	
163451	GEAR SET (75 BAUD LPR)	
176287	MODIFICATION KIT	
173778	MODIFICATION KIT (CONTROL PANEL)	
160778BR	TRANSMITTER DISTRIBUTOR	
	HOUSING	
304203	ELECTRICAL SERVICE UNIT	
173795	GEAR SET (45.5 BAUD LP)	
173776	GEAR SET (45.5 BAUD LXD)	
173992	GEAR SET (45.5 BAUD LPR)	
173820	GEAR SET (45.5 BAUD LPR)	
LPR35BRH	TYPING REPERFORATOR	TT-511/UGC
154754BR	SUB-BASE	

7.00 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR
WEATHER ARRANGEMENT

April 1, 1968

AN/UGC-44

TELETYPE MODEL 28 ASR PAGE PRINTER SET

LAAC229BR	Cabinet	CY-3062/46
LRB32	Base	MT-2422/UG
LXD31	Transmitter Distributor	TT-496/GG
LCXB13	Base	MT-2452/UG
LAK47ARE	Keyboard	MX-7180/UGC
LPR57BRH	Typing Reperforator	TT-510/UGC
LP77RE/AJV	Typing Unit	MK-7181/UGC
LMU41	Motor Unit	PD-18A/U
LMU39	Motor Unit	PD-77A/U
LPR35BRH	Typing Reperforator	TT-511/UGC
163502	Gear Set (75.0 Baud LPR)	
163505	Gear Set (75.0 Baud LP)	
163454	Gear Set (75.0 Baud LXD)	
163451	Gear Set (75.0 Baud LPR)	
176287	Modification Kit	
173776	Modification Kit	
160887BR	Transmitter Distributor Housing	
154754BR	Subbase	
304203	Service Assembly	
173795	Gear Set (45.5 Baud LP)	
173778	Gear Set (45.5 Baud LXD)	
173992	Gear Set (45.5 Baud LPR)	
173820	Gear Set (45.5 Baud LPR)	
104986	Tuning Fork	
152675	Function Bar	

Same as AN/UGC-32X except different Keyboard, Typing Reperforator and Typing Unit Arrangements.

7.00 Unit code
Series governed motor
Weather arrangement

September 15, 1969

EXHIBIT

AN/UGC-59

TELETYPE CORPORATION MODEL 35 ASSEMBLED
AUTOMATIC SEND-RECEIVE PAGE PRINTER SET

CONSISTING OF:

LP817TD/ATK	TYPING UNIT
VCL319HF	ASSEMBLED SUB-COMPONENTS

CONSISTING OF:

LAK806ATL/LRPE803	KEYBOARD NON-TYPING REPERFORATOR
LXD804	TAPE READER
LESU313	ELECTRICAL SERVICE ASSEMBLY
LAAC300HF	CABINET
LMU3	MOTOR UNIT
LCXB806HF	TAPE READER BASE AND METER
163025	GEARS - 100 WPM (LRPE)
161295	GEARS - 100 WPM (LP-LAK)
192246	CHAD CHUTE EXTENSION
164279	CHAD CHUTE
198242HF	PANEL WITH CABLE
199327HF	PANEL WITH CABLE
195787	CHAD CHUTE EXTENSION RETAINER
181910HF	FACEPLATE
198290	FACEPLATE MOUNTING HARDWARE

ASSEMBLY

11.0 UNIT CODE 8-LEVEL
SYNCHRONOUS MOTOR - 60 CYCLE
PRIVATE LINE SET
SPROCKET FEED

September 15, 1969

EXHIBIT

AN/UGC-59A

TELETYPE CORPORATION MODEL 35 ASSEMBLED
AUTOMATIC SEND-RECEIVE PAGE PRINTER SET

CONSISTING OF:

LP813TD/ATJ	TYPING UNIT
VCL319HF	ASSEMBLED SUB-COMPONENTS

CONSISTING OF:

LAK806ATL/LRPE803	KEYBOARD NON-TYPING REPERFORATOR
LXD804	TAPE READER
LESU313	ELECTRICAL SERVICE ASSEMBLY
LAAC300HF	CABINET
LMU3	MOTOR UNIT
LCXB806HF	TAPE READER BASE AND METER
163025	GEARS - 100 WPM (LRPE)
161295	GEARS - 100 WPM (LP-LAK)
192246	CHAD CHUTE EXTENSION
164279	CHAD CHUTE
198242HF	PANEL WITH CABLE
199327HF	PANEL WITH CABLE
195787	CHAD CHUTE EXTENSION RETAINER
181910HF	FACEPLATE
198290	FACEPLATE MOUNTING HARDWARE

ASSEMBLY

11.0 UNIT CODE 8-LEVEL
SYNCHRONOUS MOTOR - 60 CYCLE
PRIVATE LINE SET
FRICTION FEED

September 15, 1969

AN/UGC-62

TELETYPE CORPORATION MODEL 28 ASSEMBLED ASR SET
CONSISTING OF:

LP147YD/AJV	TYPING UNIT	
LPR35BRH	REPERFORATOR	TT-507/UG
VCL548BR ASSEMBLED SUB-COMPONENTS CONSISTING OF:		
LAAC229BR	CABINET	CY-3062/UG
LXD43	TRANSMITTER DIST.	
LCXB13	BASE	MT-2452/UG
VCL550	KEYBOARD & REPERF. ASSEM.	
LAK56ARE/LPR57BRH	KEYBOARD/REPERFORATOR	TT-505/UG
LMU12	MOTOR	PD-67/U
LRB32	BASE	MT-2422/UG
LMU3	MOTOR	PD-17A/U
163025	GEAR SET - 7.42 BAUD LPR	
161295	GEAR SET - 7.42 BAUD LP	
158027	GEAR SET - 7.42 BAUD LXD	
173706	MOD KIT FOR LMU12	
173707	MOD KIT FOR LMU3	
161813	GEAR SET	
176287	MOD KIT	
160887BR	MOD KIT	
173778	MOD KIT	
327604	ELECTRICAL SERVICE ASSEMBLY	
179473	MOD KIT	

7.42 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE
SIMILAR TO AN/UGC-35 EXCEPT EQUIPPED WITH 7.42 UNIT CODE
AND SIGNAL GENERATOR WIRED FOR NEGATIVE MARK

September 15, 1969

AN/UGC-67

TELETYPE CORPORATION MODEL 28
ASSEMBLED AUTOMATIC-SEND-RECEIVE SET CONSISTING OF:

LP147YD/AJV	TYPING UNIT	
LPR35BRP	REPERFORATOR	TT-315/UG
VCL549BR ASSEMBLED SUB-COMPONENTS CONSISTING OF:		
LAAC229BR	CABINET	CY-3062/UG
LXD43	TRANSMITTER DISTRIBUTOR	
LCXB13	BASE	MT-2452/UG
VCL551	KEYBOARD & REPERF. ASSEM.	
LAK56BRW/LPR57BRP	KEYBOARD/REPERFORATOR	TT-492/UG
LMU12	MOTOR	PD-67/U
LRB32	BASE	
LMU3	MOTOR	
163025	GEAR SET, 7.42 BAUD LPR	
161295	GEAR SET, 7.42 BAUD LP	
158027	GEAR SET, 7.42 BAUD LXD	
173706	MOD KIT FOR LMU12	
173707	MOD KIT FOR LMU3	
161813	GEAR SET, 7.42 BAUD (REPERF.)	
176287	MOD KIT	
160887BR	MOD KIT	
173778	MOD KIT	
327604	ELECTRICAL SERV. ASSEM.	
179473	MOD KIT	

7.42 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE

SAME AS AN/UGC-62 EXCEPT USES AJV INSTEAD OF AJY ON STUNT BOX
AND BRP INSTEAD OF ARE ON TYPEWHEEL.

January 5, 1970

EXHIBIT

AN/UGC-69

TELETYPE CORPORATION MODEL 28 ASSEMBLED TABLE
MOUNTED AUTOMATIC SEND-RECEIVE SET

CONSISTING OF:

LP14WY/JAG	TYPING UNIT
LPR9AWA	TYPING REPERFORATOR
173400BR	COPYHOLDER
ASSEMBLED SUB-COMPONENTS CONSISTING OF:	

LAAC257BR	CABINET
LAK42BRJ/LTPE1AWA	KEYBOARD W/TYPING PERFORATOR
LESU136	ELECTRICAL SERVICE UNIT
LCXB8	TRANSMITTER DISTRIBUTOR BASE
LXD30	TRANSMITTER DISTRIBUTOR
LMU12	MOTOR UNIT
LRB36	AUXILIARY REPERFORATOR BASE
LMU3	MOTOR UNIT
160887	MOD. KIT - TRANS. DIST. HOUSING
179670	MOD. KIT - CRADLE IMMOBILIZATION
161815	MOD. KIT - AUXILIARY REPERFORATOR, TAPE GUIDE AND MOUNTING
161861	ASSEMBLED GEAR SET - 74.2 BAUD
161859	GEAR SET - 45.5 BAUD
163300	GEAR SET - 50 BAUD

7.42 UNIT CODE

SYNCHRONOUS MOTOR - 60 CYCLE

LRB36 BASE CONTAINS GEAR SHIFT FOR 45.5, 50 and 74.2 BAUD SPEEDS

CHADLESS TAPE

SIMILAR FEATURES AS CONTAINED IN AN/UGC-6K

May 1, 1971

EXHIBIT

AN/UGC-82

TELETYPE CORPORATION MODEL 28
AUTOMATIC SEND-RECEIVE PAGE PRINTER SET

CONSISTING OF:

LP19RA/AN	TYPING UNIT
LAK4ARK/LTPE3ARA	KEYBOARD W/TYPING PERFORATOR
LESU13	ELECTRICAL SERVICE UNIT
317220	LINE RELAY
LXD4	TRANSMITTER DISTRIBUTOR
LCXB8	TRANS. DIST. BASE
LMU12	MOTOR UNIT
161861	GEAR SET (100 WPM)
LAAC200BR	CABINET
164024BR	COPY HOLDER
153440	UNIVERSAL FUNCTION BAR
153918	SET OF LATCHING PARTS
LPR9ARA	TYPING REPERFORATOR
LRB5	REPERFORATOR BASE
161813	GEAR SET FOR AUX. LPR
162477	CONTROL PANEL
LESU12	ELECTRICAL SERVICE ASSEMBLY
160387	RELAY RACK MOD. KIT
LMU3	MOTOR UNIT
161829	S.O.P. FOR LESU MOUNTING
161815	S.O.P. FOR TAPE HANDLING


7.42 UNIT CODE

60 CYCLE SYNCHRONOUS MOTOR

FLOOR CONSOLE

INCLUDES "U" UNIVERSAL CDC TO CALL ALL PRINTERS

INTO PRINT CONDITION WHEN "U" IS RECEIVED.

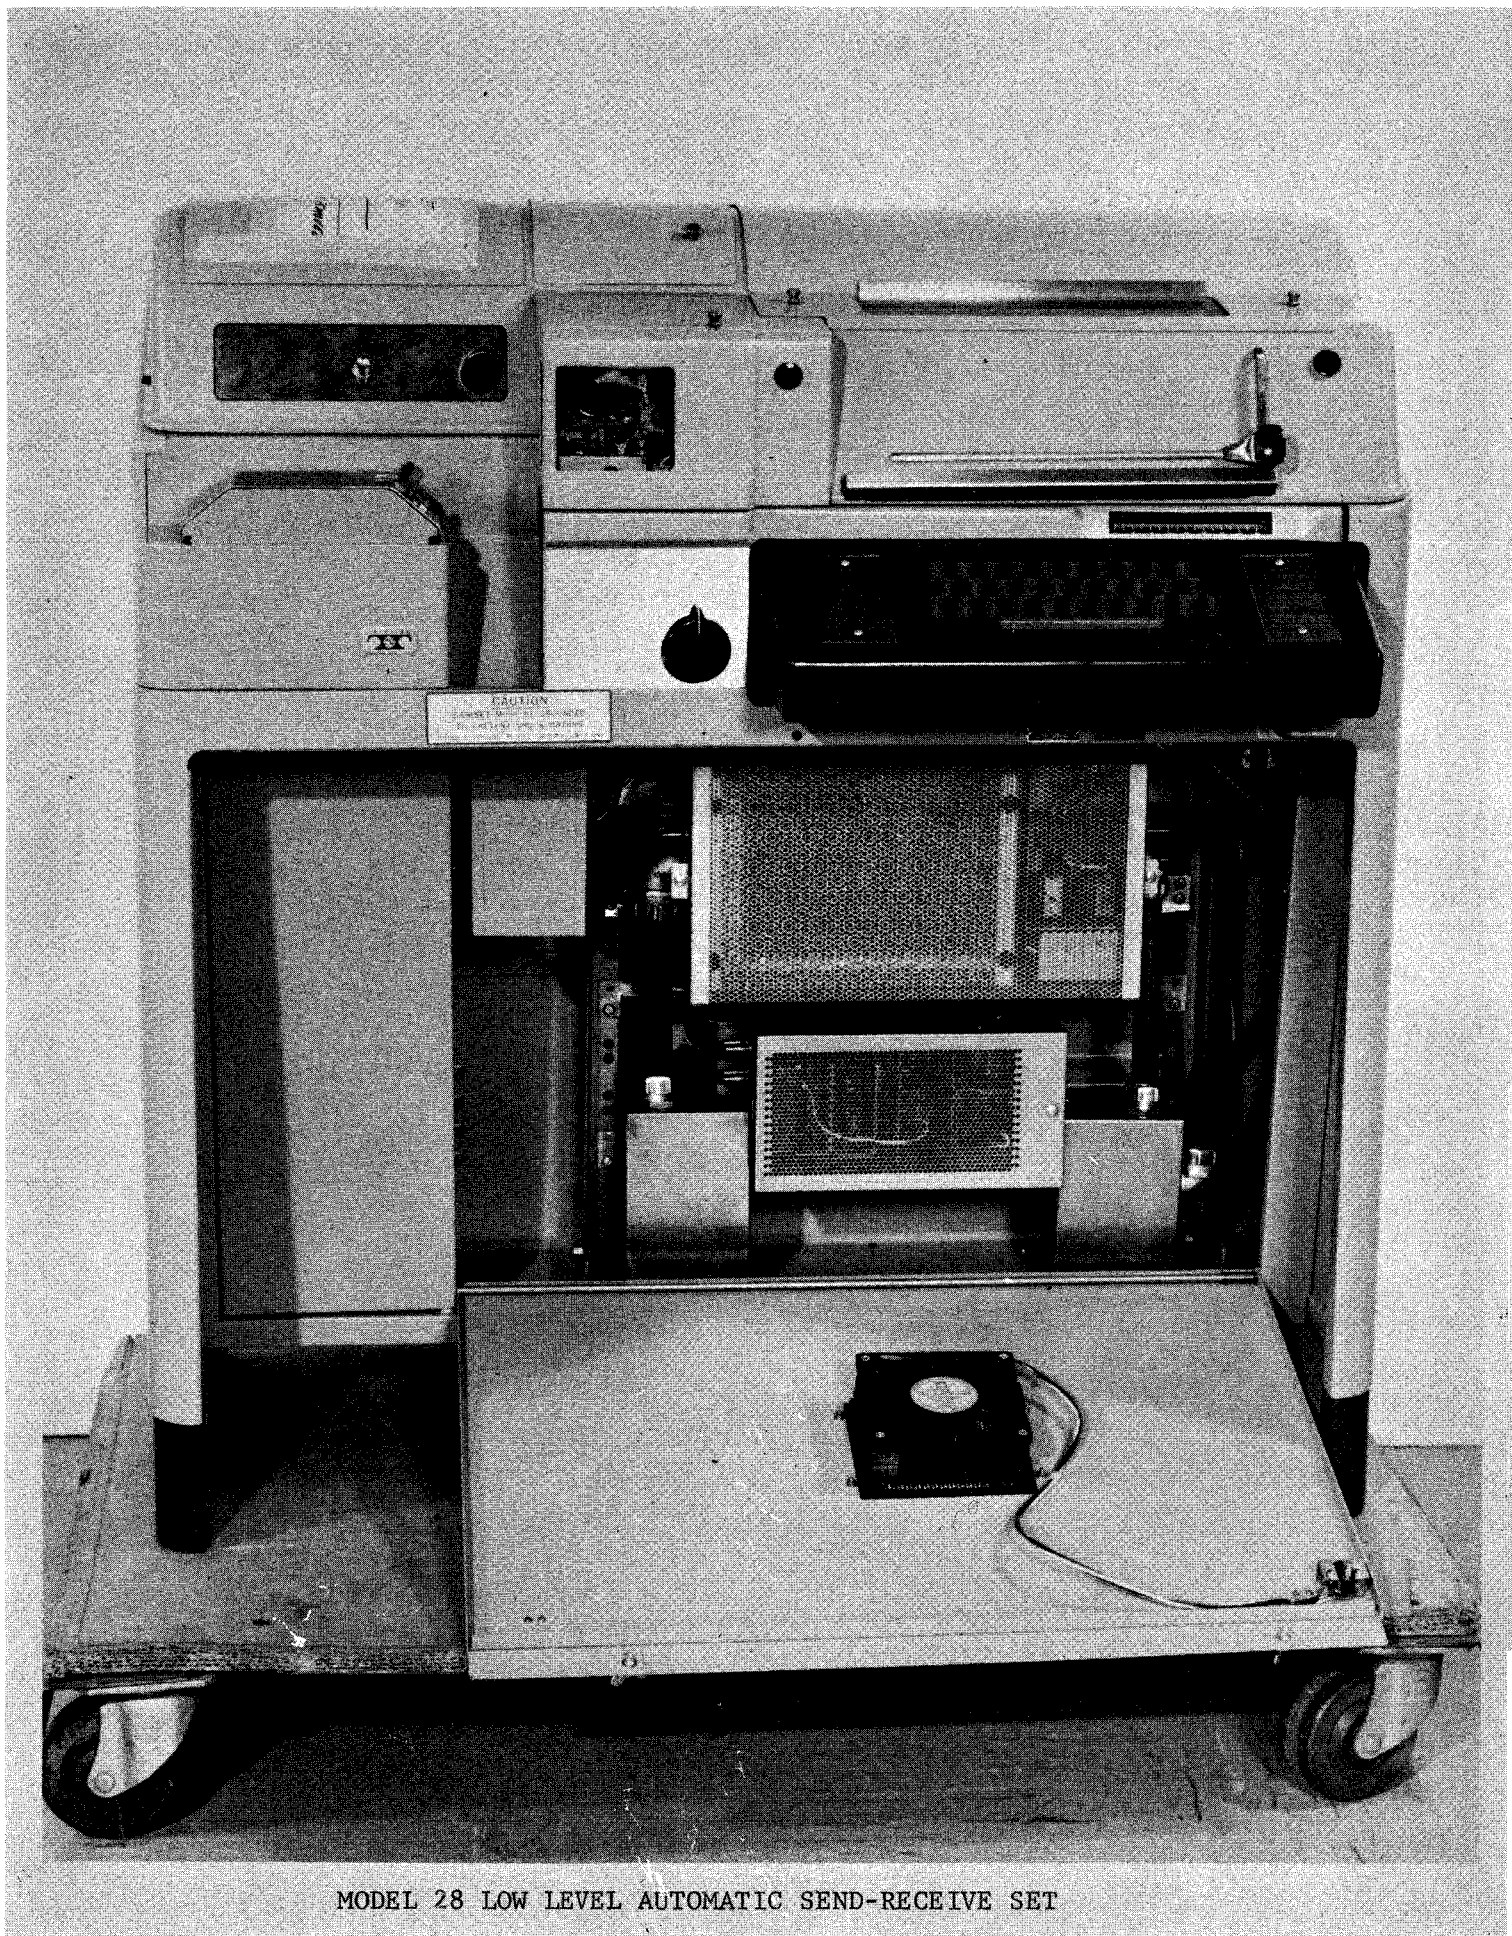

MODEL 28 LOW LEVEL AUTOMATIC SEND-RECEIVE SET

EXHIBIT

AN/UGC-48A

TELETYPE CORPORATION MODEL 28 ASSEMBLED
LOW-LEVEL AUTOMATIC SEND-RECEIVE SET

CODED 28-RFX4801A/012/AAR/BR CONSISTING OF:

LP134WY/AJG	TYPING UNIT
LPR85BRP	TYPING PERFORATOR
28-RFC4801A/012/AAR/BR	ASSEMBLED SUB-COMPONENTS C/O:
324149	MODIFICATION KIT, CONNECTION BOX
LAAC255BR	CABINET
LAK51BRJ/LTPE6BRP	KEYBOARD W/TYPING REPERFORATOR
LCXB24	TRANSMITTER DISTRIBUTOR BASE
LXD38	TRANSMITTER DISTRIBUTOR
LRB60	REPERFORATOR BASE
LESU123	ELECTRICAL SERVICE UNIT
323811	ELECTRICAL SERVICE ASSEMBLY (SIGNAL)
323812	ELECTRICAL SERVICE ASSEMBLY (CLUTCH)
161815	MODIFICATION KIT (MOUNTING FOR AUX. BASE)
LMU3	MOTOR UNIT
LMU12	MOTOR UNIT
161295	SET OF GEARS - LP (74.2 BAUD)
158027	SET OF GEARS - LXD (74.2 BAUD)
(2) 303142	KEYER CARD
(2) 323810	SELECTOR MAGNET DRIVER CARD
(2) 321991	CLUTCH MAGNET DRIVER CARD
(2) 321290	POWER SUPPLY CARD
160887BR	TRANS. DIST. HOUSING
329071	SET OF GEARS - AUX. LPR
179256	CHAD CHUTE

OPTIONAL

45.5 BAUD GEARS C/O:

161293	SET OF GEARS - LP- AGR
158029	SET OF GEARS - LXD - AGR

50 BAUD GEARS C/O:

163302	SET OF GEARS - LP - AER
161356	SET OF GEARS - LXD - AER

7.42 UNIT CODE - FULLY PERFORATED TAPE OUTPUT
60 CYCLE SYNCHRONOUS MOTOR
AUXILIARY REPERFORATOR (W/GEAR SHIFT FOR 45.5, 50 AND 74.2 BAUD)
INCLUDES COPYHOLDER

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS OF $\pm 6V$ STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD OF THE 74.2 BAUD SHOWN, THE RFX AND RFC CODES WILL CHANGE.

October 1, 1970

EXHIBIT

AN/UGC-48BY

TELETYPE CORPORATION MODEL 28 ASSEMBLED
LOW-LEVEL AUTOMATIC SEND-RECEIVE SET

CODED 28-RFX4801A/012/CDR/BR CONSISTING OF:

LP134WY/AJG	TYPING UNIT
LPR85BRP	TYPING PERFORATOR
28-RFC4801A/012/CDR/BR ASSEMBLED SUB-COMPONENTS C/O:	
324149	MODIFICATION KIT, CONNECTION BOX
LAAC255BR	CABINET
LAK51BRJ/LTPE6BRP	KEYBOARD W/TYPING REPERFORATOR
LCXB24	TRANSMITTER DISTRIBUTOR BASE
LXD38	TRANSMITTER DISTRIBUTOR
LRB60	REPERFORATOR BASE
LESU123	ELECTRICAL SERVICE UNIT
323811	ELECTRICAL SERVICE ASSEMBLY (SIGNAL)
323812	ELECTRICAL SERVICE ASSEMBLY (CLUTCH)
161815	MODIFICATION KIT (MOUNTING FOR AUX. BASE)
(2) LMU61	MOTOR UNIT
161295	SET OF GEARS - LP (74.2 BAUD)
158027	SET OF GEARS - LXD (74.2 BAUD)
(2) 303142	KEYER CARD
(2) 323810	SELECTOR MAGNET DRIVER CARD
(2) 321991	CLUTCH MAGNET DRIVER CARD
(2) 321290	POWER SUPPLY CARD
160887BR	TRANS. DIST. HOUSING
329071	SET OF GEARS - AUX. LPR
179256	CHAD CHUTE

OPTIONAL

45.5 BAUD GEARS C/O:

161293	SET OF GEARS - LP - AGR
158029	SET OF GEARS - LXD - AGR

50.0 BAUD GEARS C/O:

163302	SET OF GEARS - LP - AER
161356	SET OF GEARS - LXD - AER

7.42 UNIT CODE - FULLY PERFORATED TAPE OUTPUT

50/60 HZ. TRIAC CONTROLLED

AUXILIARY REPERFORATOR (W/GEAR SHIFT FOR 45.5, 50 AND 74.2 BAUD)
INCLUDES COPYHOLDER

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL COMPONENTS TO
MEET SIGNAL LINE INTERFACE REQUIREMENTS OF +6 V STATED IN
MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD OF THE
74.2 BAUD SHOWN, THE RFX AND RFC CODES WILL CHANGE.

January 5, 1970

EXHIBIT

AN/UGC-49

TELETYPE CORPORATION MODEL 28 ASSEMBLED
LOW-LEVEL AUTOMATIC SEND-RECEIVE SET

CODED 28-RFX4000B/013/AVF/BR CONSISTING OF:

LP135BG/AGM	TYPING UNIT
154754BR	SUB-BASE
LPR73BRP	TYPING REPERFORATOR
28-RFC4000B/013/AVF/BR ASSEMBLED SUB-COMPONENTS C/O:	
164272	MODIFICATION KIT - CHAD DISPOSAL
324149	MODIFICATION KIT, CONNECTION BOX
LAAC252BR	CABINET
LAK50BSS/LPR74BRP	KEYBOARD WITH TYPING REPERFORATOR
LCXB24	TRANSMITTER DISTRIBUTOR BASE
LXD37	TRANSMITTER DISTRIBUTOR
LRB59	REPERFORATOR BASE
LESU123	ELECTRICAL SERVICE UNIT
323815	ELECTRICAL SERVICE ASSEMBLY (SIGNAL)
323812	ELECTRICAL SERVICE ASSEMBLY (CLUTCH)
324688	MODIFICATION KIT (POWER FACTOR CORRECTION FOR LMU12)
324690	MODIFICATION KIT (POWER FACTOR CORRECTION FOR LMU3)
160887	TRANSMITTER DISTRIBUTOR HOUSING
176287	MODIFICATION KIT (MOUNTING FOR AUX. REPERFORATOR)
173778	MODIFICATION KIT (CONTROL PANEL ASSEMBLY)
LMU3	MOTOR UNIT
LMU12	MOTOR UNIT
163505	75 BAUD GEARS (LP)
163454	75 BAUD GEARS (LXD)
163502	75 BAUD GEARS (LPR)
163451	75 BAUD GEARS (AUX. LPR)
329071	75 BAUD GEARS (AUX. LPR)
(2) 303142	LOW-LEVEL KEYS CARD
(2) 321991	CLUTCH MAGNET DRIVER CARD
(2) 321290	POWER SUPPLY CARD
(3) 323810	SELECTOR MAGNET DRIVER CARD

OPTIONAL

45.5 BAUD GEARS C/O:

173795	(LP) - BEG
173776	(LXD) - BEG
173992	(LPR) - BEG
173820	(AUX. LPR) - BEG
329071	(AUX. LPR)

7.00 UNIT CODE

SYNCHRONOUS MOTOR - 60 CYCLE

AUXILIARY REPERFORATOR - FULLY PERFORATED TAPE OUTPUT
CRITICOM TYPE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL COMPONENTS TO MEET
SIGNAL LINE INTERFACE REQUIREMENTS OF ± 6 V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD OF THE 75 BAUD
SHOWN, THE RFX AND RFC CODES WILL CHANGE.

January 5, 1970

EXHIBIT

AN/UGC-49X

TELETYPE CORPORATION MODEL 28 ASSEMBLED
LOW-LEVEL AUTOMATIC SEND-RECEIVE SET

CODED 28-RFX4000B/013/AWF/BR CONSISTING OF:

LP135BG/AGM	TYPING UNIT
154754BR	SUB-BASE
LPR73BRP	TYPING REPERFORATOR
28-RFC4000B/013/AWF/BR ASSEMBLED SUB-COMPONENTS C/O:	
164272	MODIFICATION KIT - CHAD DISPOSAL
324149	MODIFICATION KIT, CONNECTION BOX
LAAC252BR	CABINET
LAK50BSS/LPR74BRP	KEYBOARD WITH TYPING REPERFORATOR
LCXB24	TRANSMITTER DISTRIBUTOR BASE
LXD37	TRANSMITTER DISTRIBUTOR
LRB59	REPERFORATOR BASE
LESU123	ELECTRICAL SERVICE UNIT
323815	ELECTRICAL SERVICE ASSEMBLY (SIGNAL)
323812	ELECTRICAL SERVICE ASSEMBLY (CLUTCH)
324688	MODIFICATION KIT (POWER FACTOR CORRECTION FOR LMU12)
324690	MODIFICATION KIT (POWER FACTOR CORRECTION FOR LMU3)
160887BR	TRANSMITTER DISTRIBUTOR HOUSING
176287	MODIFICATION KIT (MOUNTING FOR AUX. REPERFORATOR)
173778	MODIFICATION KIT (CONTROL PANEL ASSEMBLY)
LMU39	MOTOR UNIT
LMU41	MOTOR UNIT
163505	75 BAUD GEARS (LP)
163454	75 BAUD GEARS (LXD)
163502	75 BAUD GEARS (LPR)
329071	75 BAUD GEARS (AUX. LPR)
163451	75 BAUD GEARS (AUX. LPR)
(3) 323810	SELECTOR MAGNET DRIVER CARD
(2) 303142	LOW-LEVEL KEYSER CARD
(2) 321991	CLUTCH MAGNET DRIVER CARD
(2) 321290	POWER SUPPLY CARD

7.00 UNIT CODE

SERIES GOVERNED MOTOR - 50/60 CYCLE

AUXILIARY REPERFORATOR - FULLY PERFORATED TAPE OUTPUT

CRITICOM TYPE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL COMPONENTS TO MEET
SIGNAL LINE INTERFACE REQUIREMENTS OF ± 6 V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD OF THE
75 BAUD SHOWN, THE RFX AND RFC CODES WILL CHANGE.

January 5, 1970

EXHIBIT

AN/UGC-54

TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW-LEVEL
AUTOMATIC SEND-RECEIVE SET

CODED 28-RFX4001B/013/AWF/BR CONSISTING OF:

LP135BG/AGM	TYPING UNIT
LPR73BRP	TYPING REPERFORATOR
154754BR	SUB-BASE
28-RFC4001B/013/AWF/BR ASSEMBLED SUB-COMPONENTS C/O:	
164272	MODIFICATION KIT
324149	MOD. KIT CONNECTION BOX
LAAC252BR	CABINET
LAK55BSS/LPR82BRP	KEYBOARD W/TYPING REPERFORATOR
LMU39	MOTOR UNIT
LMU41	MOTOR UNIT
160887	TRANSMITTER DISTRIBUTOR HOUSING
163505	GEAR SET (75 BAUD)
176287	MODIFICATION KIT
173778	MODIFICATION KIT
163454	GEAR SET
163502	GEAR SET
163451	GEAR SET
2 - 303142	KEYER CARD
3 - 323810	SELECTOR MAGNET DRIVER
2 - 321991	CLUTCH MAGNET DRIVER
2 - 321290	POWER SUPPLY CARD $\frac{1}{2}$ AMP
LCXB24	TRANSMITTER DISTRIBUTOR BASE
LXD37	TRANSMITTER DISTRIBUTOR
LRB59	REPERFORATOR BASE
LESU123	ELECTRICAL SERVICE UNIT
323815	ELECTRICAL SERVICE ASSEMBLY - (SIGNAL)
323812	ELECTRICAL SERVICE ASSEMBLY - (CLUTCH)
329071	GEAR
ASSEMBLY	

OPTIONAL

173795
173992
173820
173776
104986

45.5 BAUD GEARS C/O:

(LP)
(LPR)
(LRP)
(LXD)
TUNING FORK

7.00 UNIT CODE

SERIES GOVERNED MOTOR 50/60 - CYCLE
CRITICOM TYPE
INCLUDES POWER BACK SPACE FEATURE
AUXILIARY REPERFORATOR - FULLY PERFORATED TAPE OUTPUT
(FORMERLY AN/UGC-32X)

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD OF THE
75 BAUD SHOWN, THE RFK AND RFC CODES WILL CHANGE.

NOVEMBER 1, 1970

EXHIBIT

AN/UGC-54B

TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW-LEVEL
AUTOMATIC SEND-RECEIVE SET

CODED 28-RFX4001B/013/CAF/BR CONSISTING OF:

LP135BG/AGM	TYPING UNIT
LPR73BRP	TYPING REPERFORATOR
154754BR	SUB-BASE
28-RFC4001B/013/CAF/BR	ASSEMBLED SUB-COMPONENTS C/O:
164272	MODIFICATION KIT
324149	MOD. KIT CONNECTION BOX
LAAC252BR	CABINET
LAK55BSS/LPR82BRP	KEYBOARD W/TYPING REPERFORATOR
LMU61	MOTOR UNIT
LMU61	MOTOR UNIT
160887BR	TRANSMITTER DISTRIBUTOR HOUSING
163505	GEAR SET (75 BAUD)
176287	MODIFICATION KIT
173778	MODIFICATION KIT
163454	GEAR SET
163502	GEAR SET
163451	GEAR SET
(2) 303142	KEYER CARD
(3) 323810	SELECTOR MAGNET DRIVER
(2) 321991	CLUTCH MAGNET DRIVER
(2) 321290	POWER SUPPLY CARD $\frac{1}{2}$ AMP
LCXB24	TRANSMITTER DISTRIBUTOR BASE
LXD37	TRANSMITTER DISTRIBUTOR
LRB59	REPERFORATOR BASE
LESU123	ELECTRICAL SERVICE UNIT
323815	ELECTRICAL SERVICE ASSEMBLY - (SIGNAL)
323812	ELECTRICAL SERVICE ASSEMBLY - (CLUTCH)
329071	GEAR

7.00 UNIT CODE

SERIES GOVERNED MOTOR 50/60 - CYCLE TRIAC CONTROLLED
CRITICOM TYPE

INCLUDES POWER BACK SPACE FEATURE

AUXILIARY REPERFORATOR - FULLY PERFORATED TAPE OUTPUT
(FORMERLY AN/UGC-32X)

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

January 5, 1970

EXHIBIT

AN/UGC-57

TELETYPE CORPORATION MODEL 28 ASSEMBLED
LOW-LEVEL AUTOMATIC SEND-RECEIVE SET

CODED 28-RFX4002B/013/AVF/BR CONSISTING OF:

LP135BG/AGM	TYPING UNIT
LPR73BRP	TYPING REPERFORATOR
154754BR	SUB-BASE
28-RFC4004B/013/AVF/BR ASSEMBLED SUB-COMPONENTS C/O:	
164272	MODIFICATION KIT - CHAD DISPOSAL
324149	MODIFICATION KIT - CONNECTOR BOX
LAAC252BR	CABINET
LAK55BSS/LPR82BRP	KEYBOARD WITH TYPING REPERFORATOR
LMU3	MOTOR UNIT
LMU12	MOTOR UNIT
160887BR	TRANSMITTER DISTRIBUTOR HOUSING
163505	GEAR SET - 75 BAUD
176287	MODIFICATION KIT
173778	MODIFICATION KIT
163454	GEAR SET - 75 BAUD
163502	GEAR SET - 75 BAUD
163451	GEAR SET - 75 BAUD
(2) 303142	KEYER CARD
(3) 323810	SELECTOR MAGNET DRIVER
(2) 321991	CLUTCH MAGNET DRIVER
(2) 321290	POWER SUPPLY CARD
LCXB24	TRANSMITTER DISTRIBUTOR BASE
LXD37	TRANSMITTER DISTRIBUTOR
LRB59	REPERFORATOR BASE
LESU123	ELECTRICAL SERVICE UNIT
323815	ELECTRICAL SERVICE ASSEMBLY (SIGNAL)
323812	ELECTRICAL SERVICE ASSEMBLY (CLUTCH)
324688	MOD. KIT - POWER FACTOR FOR LMU12
324690	MOD. KIT - POWER FACTOR LMU3
329071	GEAR SET

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE
CRITICOM TYPE

INCLUDES POWER BACK SPACE, FULLY-
PERFORATED TAPE OUTPUT-AUXILIARY
REPERFORATOR.

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL COMPONENTS
TO MEET SIGNAL LINE INTERFACE REQUIREMENT OF +6V STATED IN
MIL-STD-188B.

CRITICOM TYPE

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD OF THE
75 BAUD SHOWN, THE RFX AND RFC CODES WILL CHANGE.

EXHIBITAN/UGC-87TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW-LEVEL
AUTOMATIC SEND-RECEIVE SETCODED 28-RFX4005B/013/FBF/BR CONSISTING OF:

LP135BG/AGM	TYPING UNIT
LPR73BRP	TYPING REPERFORATOR
154754BR	SUBBASE
328010	NUMBERING MODULE
322080	LINE ASSURANCE CARD
328003	CRYSTAL
28-RFC4007B/013/FBF/BR	ASSEMBLED SUBCOMPONENTS C/O:
164272	MODIFICATION KIT
324149	MOD. KIT CONNECTION BOX
LAAC259BR	CABINET
28RFC9901B	COMBINATION KEYBOARD BASE AND TYPING REPERFORATOR C/O:
LAK55BSS	KEYBOARD
LPR82BRP	TYPING REPERFORATOR
LMU39	MOTOR UNIT
LMU41	MOTOR UNIT
160887	TRANSMITTER DISTRIBUTOR HOUSING
163505	GEAR SET (75 BAUD)
176287	MODIFICATION KIT
173778	MODIFICATION KIT
163454	GEAR SET
163502	GEAR SET
163451	GEAR SET
2 - 303142	KEYER CARD
3 - 323810	SELECTOR MAGNET DRIVER
321991	CLUTCH MAGNET DRIVER
2 - 321290	POWER SUPPLY CARD ½ AMP
LCXB26	TRANSMITTER DISTRIBUTOR BASE
LXD37	TRANSMITTER DISTRIBUTOR
LRB59	REPERFORATOR BASE
LESU123	ELECTRICAL SERVICE UNIT
323815	ELECTRICAL SERVICE ASSEMBLY - (SIGNAL)
323812	ELECTRICAL SERVICE ASSEMBLY - (CLUTCH)
329071	GEAR
336011BR	POWER SUPPLY ASSEMBLY AND ENCL.
303160	DUAL CLUTCH MAGNET DRIVER CARD
303164	CLOCK AMPLIFIER CARD
334179	CONDUIT
334178	REDUCER
325939	CONNECTOR
325937	CONNECTOR
334177	CABLE ASSEMBLY
324688	POWER FACTOR CORRECTION MOD. KIT - LMU12
324690	POWER FACTOR CORRECTION MOD. KIT - LMU3
ASSEMBLY	

7.00 UNIT CODE - CRITICOM TYPE

SERIES GOVERNED MOTOR 50/60 CYCLE - INCLUDES POWER BACKSPACE FEATURE
 AUXILIARY REPERFORATOR - FULLY PERFORATED TAPE OUTPUT
 (FORMERLY AN/UGC-32X) - SINGLE READER MESSAGE NUMBERING FEATURE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL COMPONENTS TO MEET
 SIGNAL LINE INTERFACE REQUIREMENTS OF +6 V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD OF THE
 75 BAUD SHOWN, THE RFX AND RFC CODES WILL CHANGE.

November 1, 1970

EXHIBIT
AN/UGC-90

TELETYPE CORPORATION MODEL 28 ASSEMBLED
LOW-LEVEL AUTOMATIC SEND-RECEIVE SET

CODED 28-RFX4004B/013/DAF/BR CONSISTING OF:

322080	LINE ASSURANCE CARD
328003	CRYSTAL
328000	NUMBERING MODULE
LP135BG/AGM	TYPING UNIT
154754BR	SUB-BASE
LPR73BRP	TYPING REPERFORATOR
28-RFC4005B/013/DAF/BR	ASSEMBLED SUB-COMPONENTS C/O:
324149	MOD. KIT, CONNECTION BOX
LAAC259BR	CABINET
LAK50BSS/LPR74BRP	KEYBOARD W/TYPING REPERFORATOR
LCXB27	TRANS. DIST. BASE FOR TANDEM READERS
(2) LXD37	TRANSMITTER DISTRIBUTOR
LRB59	REPERFORATOR BASE
LESU123	ELECTRICAL SERVICE UNIT
323815	ELECTRICAL SERVICE ASSEMBLY (SIGNAL)
323812	ELECTRICAL SERVICE ASSEMBLY (CLUTCH)
324688	MOD. KIT (POWER FACTOR CORRECTION FOR LMU12)
324690	MOD. KIT (POWER FACTOR CORRECTION FOR LMU3)
170272BR	MOD. KIT, T.D. HOUSING, TANDEM READERS
176287	MOD. KIT (MTG. FOR AUX. REPER.)
173778	MOD. KIT (CONTROL PANEL ASSEM.)
LMU3	MOTOR UNIT
LMU12	MOTOR UNIT
163505	75 BAUD GEARS (LP)
333607	75 BAUD GEARS (LXD)
163502	75 BAUD GEARS (LPR)
163451	75 BAUD GEARS (AUX. LPR)
329071	75 BAUD GEARS (AUX. LPR)
(2) 303142	LOW-LEVEL KEYS CARD
321991	CLUTCH MAGNET DRIVER CARD
(2) 321290	POWER SUPPLY CARD
(3) 323810	SELECTOR MAGNET DRIVER CARD
336011BR	POWER SUPPLY ASSEMBLY AND ENCLOSURE
164272	MOD. KIT TO PROVIDE CHAD DISPOSAL FOR AUX. REPERF.
334177	CABLE ASSEMBLY
334178	REDUCER
325937	CONNECTOR
334179	CONDUIT
325939	CONNECTOR
303160	DUAL CLUTCH MAGNET DRIVER CARD
303164	CLOCK AMPLIFIER CARD

OPTIONAL

173795
333608
173992
173820
328007

45.5 BAUD GEARS C/O:

(LP) - DBX
(LXD) - DBX
(LPR) - DBX
(AUX. LPR) - DBX
CRYSTAL

7.00 UNIT CODE - SYNCHRONOUS MOTOR - 60 CYCLE AUXILIARY REPERFORATOR -
FULLY PERFORATED TAPE OUTPUT CRITICOM TYPE - TANDEM READER MESSAGE -
NUMBERING FEATURE. INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL COMPONENTS
TO MEET SIGNAL LINE INTERFACE REQUIREMENTS OF +6V STATED IN MIL-STD-188B.
NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD OF 75 BAUD SHOWN, THE RFX
AND RFC CODES WILL CHANGE.

NOVEMBER 1, 1970

EXHIBIT

AN/UGC-90X

TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW-LEVEL
AUTOMATIC SEND-RECEIVE SET

CODED 28-RFX4004B/013/DDF/BR CONSISTING OF:

	322080	LINE ASSURANCE CARD
	328003	CRYSTAL
	328000	NUMBERING MODULE
	LP135BG/AGM	TYPING UNIT
	154754BR	SUB-BASE
	LPR73BRP	TYPING REPERFORATOR
	28-RFC4005B/013/DDF/BR	ASSEMBLED SUB-COMPONENTS C/O:
	324149	MOD. KIT CONNECTION BOX
	LAAC259BR	CABINET
	LAK50BSS/LPR74BRP	KEYBOARD W/TYPING REPERFORATOR
	LCXB27	TRANS. DIST. BASE FOR TANDEM READERS
(2)	LXD37	TRANSMITTER DISTRIBUTOR
	LRB59	REPERFORATOR BASE
	LESU123	ELECTRICAL SERVICE UNIT
	323815	ELECTRICAL SERVICE ASSEMBLY (SIGNAL)
	323812	ELECTRICAL SERVICE ASSEMBLY (CLUTCH)
	324688	MOD. KIT (POWER FACTOR CORRECTION FOR LMU12)
	324690	MOD. KIT (POWER FACTOR CORRECTION FOR LMU3)
	170272BR	MOD. KIT, T.D. HOUSING, TANDEM READERS
	176287	MOD. KIT (MTG. FOR AUX. REPER.)
	173778	MOD. KIT (CONTROL PANEL ASSEM.)
	LMU41	MOTOR UNIT
	LMU39	MOTOR UNIT
	163505	75 BAUD GEARS (LP)
	333607	75 BAUD GEARS (LXD)
	163502	75 BAUD GEARS (LPR)
	163451	75 BAUD GEARS (AUX. LPR)
(2)	303142	LOW-LEVEL KEYS CARD
	321991	CLUTCH MAGNET DRIVER CARD
(2)	321290	POWER SUPPLY CARD
(3)	323810	SELECTOR MAGNET DRIVER CARD
	336011BR	POWER SUPPLY ASSEMBLY AND ENCLOSURE
	164272	MOD. KIT TO PROVIDE CHAD DISPOSAL FOR AUX. REPERFORATOR
	334177	CABLE ASSEMBLY
	334178	REDUCER
	325937	CONNECTOR
	334179	CONDUIT
	325939	CONNECTOR
	303160	DUAL CLUTCH MAGNET DRIVER CARD
	303164	CLOCK AMPLIFIER CARD
	329071	75 BAUD GEARS - AUX. LPR

7.00 UNIT CODE - 50/60 SERIES GOVERNED MOTOR AUXILIARY REPERFORATOR
FULLY PERFORATED TAPE OUTPUT CRITICOM TYPE - TANDEM READER MESSAGE
NUMBERING FEATURE. INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL COMPONENTS
TO MEET SIGNAL LINE INTERFACE REQUIREMENTS OF +6V STATED IN MIL-STD-188B.
NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD OF 75 BAUD SHOWN, THE
RFX AND RFC CODES WILL CHANGE.



M28 RECEIVE-ONLY PAGE PRINTER SET

60113846

September 15, 1969

AN/FGC116

TELETYPE MODEL 28 RECEIVE-ONLY

RACK MOUNTED PAGE PRINTER SET

LPC206BR	Cover	CW-568/UG
LB10/000	Base Unit	MT-2419/UG
LP77YD/AGM	Typing Unit	MX-3311/UG
LMU3	Motor Unit	PD-17A/U
PW201BR	Paper Winder	RL-215/UG
173816BR	Service Assembly	
173851	Cable	
173780	Cable	
163505	Gear Set (75 Baud)	

Same as TT306/UG except it uses 173861 (including power factor corrector) service assembly instead of 173395.

7:00 Unit Code
60 Cycle Synchronous Motor

January 5, 1970

EXHIBIT

AN/UGC-25A

TELETYPE CORPORATION MODEL 28 RECEIVE-ONLY COMPACT PAGE
PRINTER SET

CONSISTING OF:

LP111WY/AJG TYPING UNIT

LLB1 BASE

LPC401BR COVER

LMU37 MOTOR UNIT

OPTIONAL
151988 SUPPRESSOR

7.42 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE
AUTOMATIC LINE FEED FEATURE

January 5, 1970

EXHIBIT

AN/UGC-25AX

TELETYPE CORPORATION MODEL 28 RECEIVE-ONLY
COMPACT PAGE PRINTER SET

CONSISTING OF:

LP111WY/AJG TYPING UNIT

LLB2 BASE

LPC401BR COVER

LMU51 MOTOR UNIT

OPTIONAL
151988 SUPPRESSOR

7.42 UNIT CODE
SYNCHRONOUS MOTOR - 50 CYCLE
AUTOMATIC LINE FEED FEATURE

April 1, 1968

AN/UGR-3

TELETYPE MODEL 28 RECEIVE-ONLY PAGE PRINTER SET

*LAC204BR237	Cabinet, Electrical Equipment	CY-2538/UG
*LESU7/147	Panel, Power Distribution	SB-964/UG
*LB4/161	Base	MT-1443/UG
LP14RE/AJG	Typing Unit	TT-441/UG
*LMU3	Motor	
161293	Set of Gears (60 wpm)	
152766	Set of Gears (67 wpm)	
*161295	Set of Gears (100 wpm)	

*Assemble - One set assembled depending on customer requisition.

Weather symbols

April 1, 1968

EXHIBIT

AN/UGR-4

TELETYPE CORPORATION M-28 ASSEMBLED
COMPACT RECEIVE-ONLY SET

CODED VSL564BR CONSISTING OF:

LLB1	BASE
LP111RE/AJF	TYPING UNIT
LMU37	MOTOR UNIT
LPC401BR	COVER
151988	SUPPRESSOR (POWER LINE FILTER)

7.42 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR
WEATHER ARRANGEMENT

January 5, 1970

TT-171C/UG

TELETYPE MODEL 28 RECEIVE-ONLY PAGE PRINTER SET

*LAC204BR237	Cabinet	CY-2538/UG
*LESU7/147	Electrical Service Unit	SB-964/UG
*LB4/161	Base	MT-1443/UG
LP14WY/AJG	Typing Unit	PD-17A/U
161293	Set of Gears (45.5 Baud)	
152766	Set of Gears (50.0 Baud)	
*161295	Set of Gears (74.2 Baud)	
LMU3	Motor Unit	PD-17A/U

*Assembled - one set assembled depending on customer requisition

7.42 Unit Code

60 cycle synchronous motor

Automatic line feed function in "Stunt Box"

January 5, 1970

TT-283A/UG

TELETYPE MODEL 28 RECEIVE-ONLY PAGE PRINTER SET

*LAC204BR237	Cabinet	CY-2538/UG
*LESU7/147	Electrical Service Unit	SB-964/UG
*LB4/161	Base	MT-1443/UG
*LMU38	Motor Unit	PD-108/UG
LP14WY/AJG	Typing Unit	TT-437/UG
159660	Set of Gears (45.5 Baud)	
159700	Set of Gears (74.2 Baud)	

*Assembled - one set assembled depending on customer
requisition

Synchronous motor (50 cycle)
Floor console
Automatic line feed function in stunt box

January 5, 1970

TT-306A/UG

TELETYPE MODEL 28 RACK-MOUNTED

RECEIVE-ONLY PAGE PRINTER SET

*LPC206BR	Cover	CW-568/UG
*LB10/000	Base	MT-2419/UG
*LMU3	Motor Unit	PD-17A/U
LP77BG/AGM	Typing Unit	MX-3311/UG
LPW300BR	Paper Winder	RL-235/UG
173395BR	Electrical Service Assembly	SB-1226/UG
193950	Copy Display Rack	
*163505	Set of Gears (75.0 Baud)	
173851	Cable Assembly	
173780	Cable Assembly	
<u>Optional Item</u>		
173795	Set of Gears (45.5 Baud)	

*Assembled Set

Synchronous motor

7.00 Unit code

Automatic line feed function in "Stunt Box"

CRITICOMM Type

Same as TT-306/UG except LPW300BR replaces PW201BR

April 1, 1968

TT-306B/UG

TELETYPE MODEL 28 RECEIVE-ONLY SET

LPC206BR	Cover	CW-568/UG
LB10/000	Base	MT-2419/UG
LMU3	Motor Unit	PD-17A/U
LP77YD/AGM	Typing Unit	MX-3311/UG
LPW300BR	Paper Winder	RL-235/UG
310174	Electrical Service Assembly	SB-2620/UG
193950	Copy Display Rack	
163505	Set of Gears (75 Baud)	
173851	Cable Assembly	
173780	Cable Assembly	

Set same as TT-306A/UG except includes two tube drivers in the electrical service assembly

January 5, 1970

EXHIBIT

TT-340B/UG

TELETYPE CORPORATION MODEL 28 ASSEMBLED RACK
MOUNTED RECEIVE-ONLY PAGE PRINTER SET
CONSISTING OF:

LPC206BR	COVER (SKIN TIGHT)
*LB10	BASE
*LMU41	MOTOR UNIT
173395BR	ELECTRICAL SERVICE ASSEMBLY
LPW300BR	PAPER WINDER
LP77BG/AGM	TYPING UNIT
*163505	GEAR SET (75 BAUD)
*173851	CABLE
*173780	CABLE
104986	SPEED INDICATOR
193950	DISPLAY RACK

*ASSEMBLY

7.00 UNIT CODE
CRITICOM TYPE
50/60 CYCLE SERIES GOVERNED MOTOR
(SIMILAR TO TT-306A/UG EXCEPT SERIES GOVERNED MOTOR)

April 1, 1968

TT-525/UG

TELETYPE MODEL 28 RECEIVE-ONLY SET

LAC214BR255	Cabinet	CY-4703/FG
LB10/000	Base	MT-2419/UG
LP77YD/AGM	Typing Unit	MX-3311/UG
LMU3	Motor Unit	PD-17A/U
PW201BR	Paper Winder	RL-215/UG
173783	Electrical Service Assembly	
154754BR	Sub-Base	

7.00 Unit Code
60 Cycle Synchronous Motor
CRITICOM Type
Floor Console

April 1, 1968

TT-525X/UG

TELETYPE MODEL 28 RECEIVE-ONLY SET

LAC214BR255	Cabinet	CY-4703/FG
LB10/000	Base	MT-2419/UG
LP77YD/AGM	Typing Unit	MX-3311/UG
LMU41	Motor Unit	PD-18A/U
PW201BR	Paper Winder	RL-215/UG
173783	Electrical Service Assembly	
154754BR	Subbase	

Series Governed Motor
7.00 Unit Code
Floor Console

September 15, 1969

EXHIBIT

TT-583/UG

TELETYPE CORPORATION MODEL 28 RECEIVE-
ONLY RACK MOUNTED PAGE PRINTER SET

LPC206BR	COVER
LB10/000	BASE UNIT
LMU3	MOTOR UNIT
LP77YD/AGM	TYPING UNIT
173816BR	ELECTRICAL SERVICE UNIT
LPW300BR	PAPER WINDER
173851	CABLE
163505	GEAR SET (75 BAUD)
173780	CABLE

7.00 UNIT CODE
SYNCHRONOUS MOTOR

SIMILAR TO AN/FGC-116 EXCEPT USES LPW300BR INSTEAD OF PW201BR.

September 15, 1969

EXHIBIT

TT-584/UG

TELETYPE CORPORATION MODEL 28
RECEIVE-ONLY SET

LAC214BR255	CABINET
LB4/249	BASE
LP77YD/AJV	TYPING UNIT
LMU41	MOTOR UNIT
LPW300BR	PAPER WINDER
304206	ELECTRICAL SERVICE ASSEMBLY
163505	GEAR SET (75 BAUD)
173795	GEAR SET (45.5 BAUD)
104986	SPEED INDICATOR

7.00 UNIT CODE
SERIES GOVERNED MOTOR - 50/60 CYCLE

SIMILAR TO TT-525X/UG EXCEPT USES:

LPW300BR	INSTEAD OF	PW201BR
304206	" "	173783
LB4/249	" "	LB10/000

May 1, 1971

EXHIBIT


TT-627/UG

TELETYPE CORPORATION MODEL 28
RECEIVE-ONLY PAGE PRINTER SET


CONSISTING OF:

LP19RA/AN	TYPING UNIT
LB4/146	BASE
LESU7/134	ELECTRICAL SERVICE UNIT
317220	LINE RELAY
LMU3	MOTOR UNIT
153440	UNIVERSAL FUNCTION BAR
161295	GEAR SET (100 WPM)
LAC204BR250	CABINET
153918	SET OF LATCHING PARTS

7.42 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR
INCLUDES "U" UNIVERSAL CDC TO CALL ALL PRINTERS
INTO PRINT CONDITION WHEN "U" IS RECEIVED.

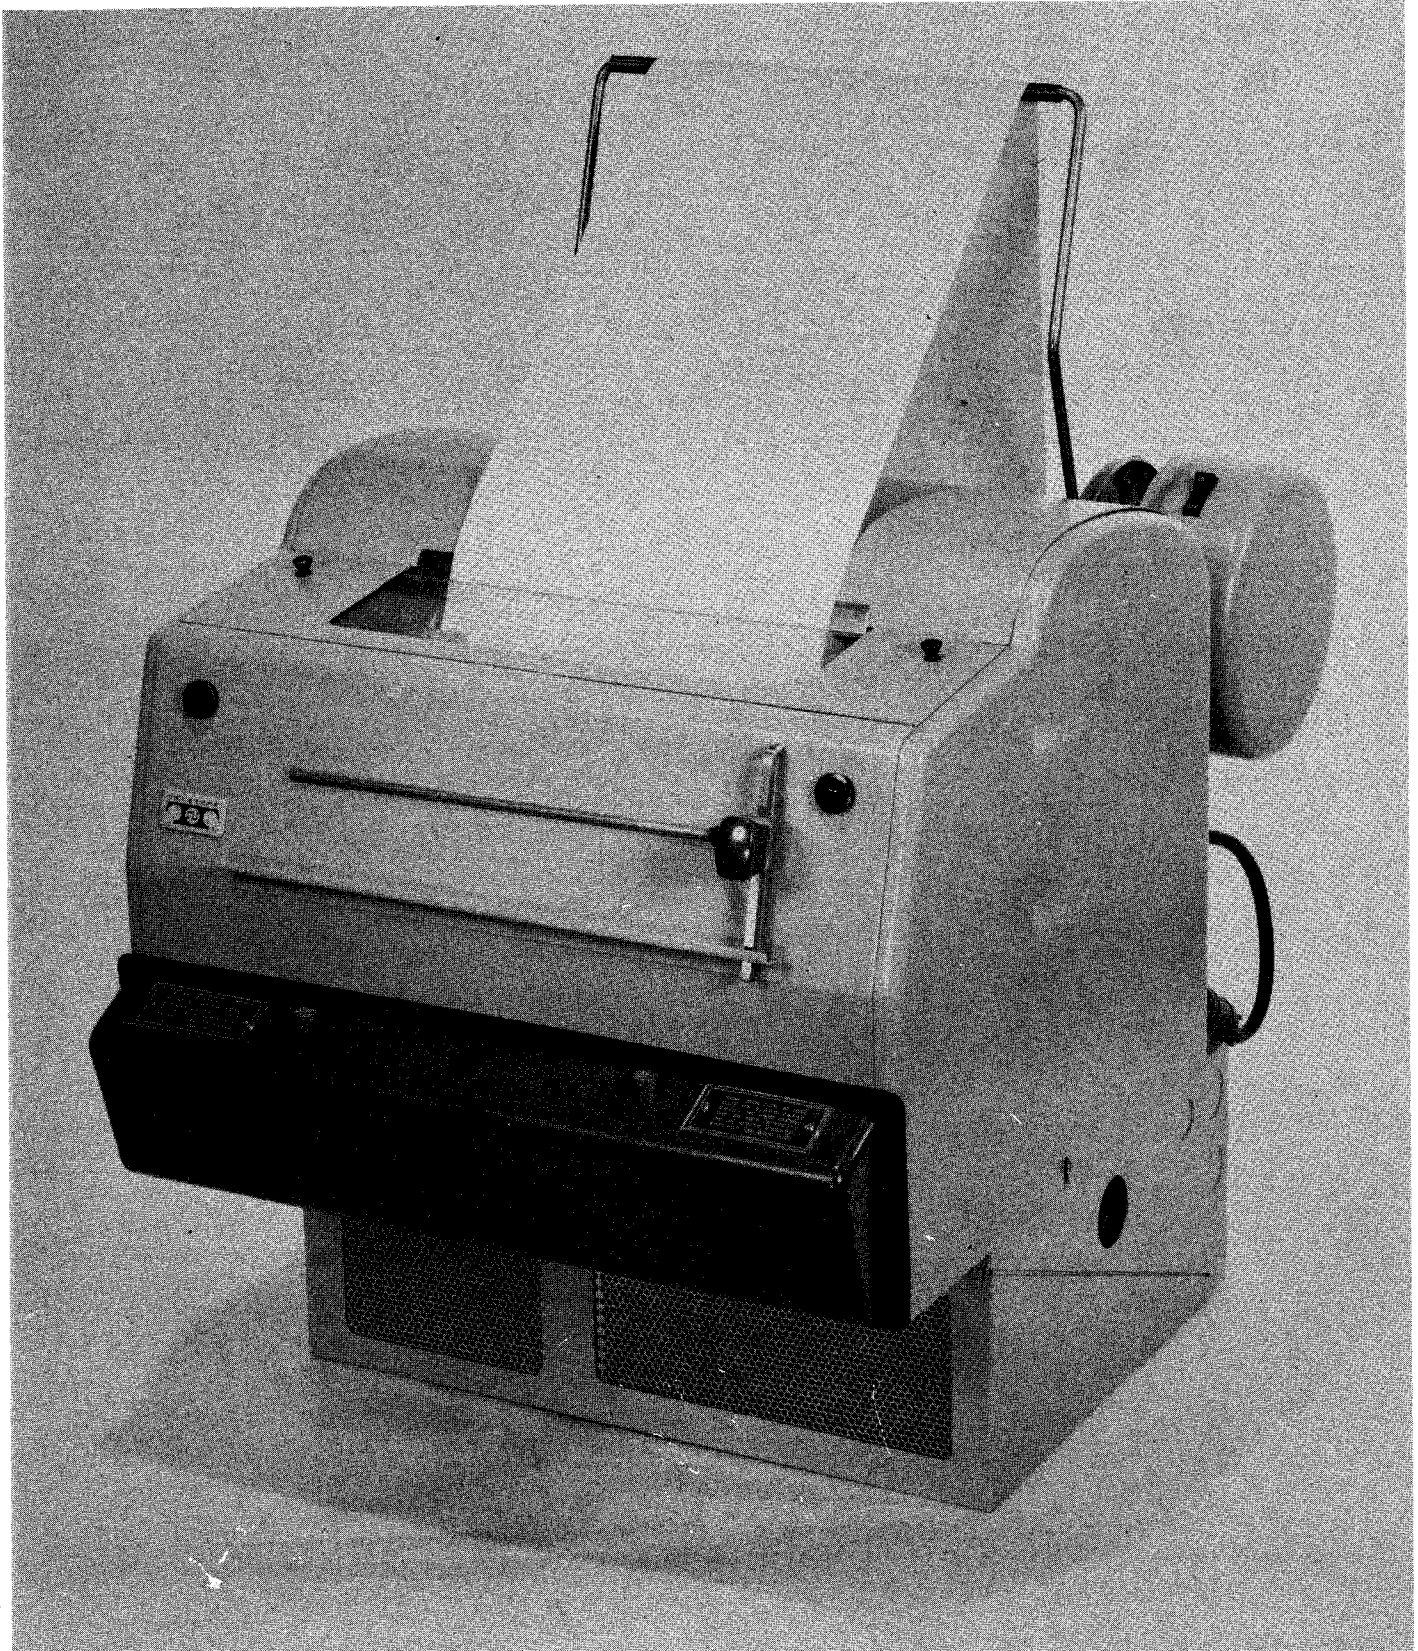

MODEL 28 LOW LEVEL RECEIVE-ONLY PAGE PRINTER SET WITH SKIN TIGHT COVER

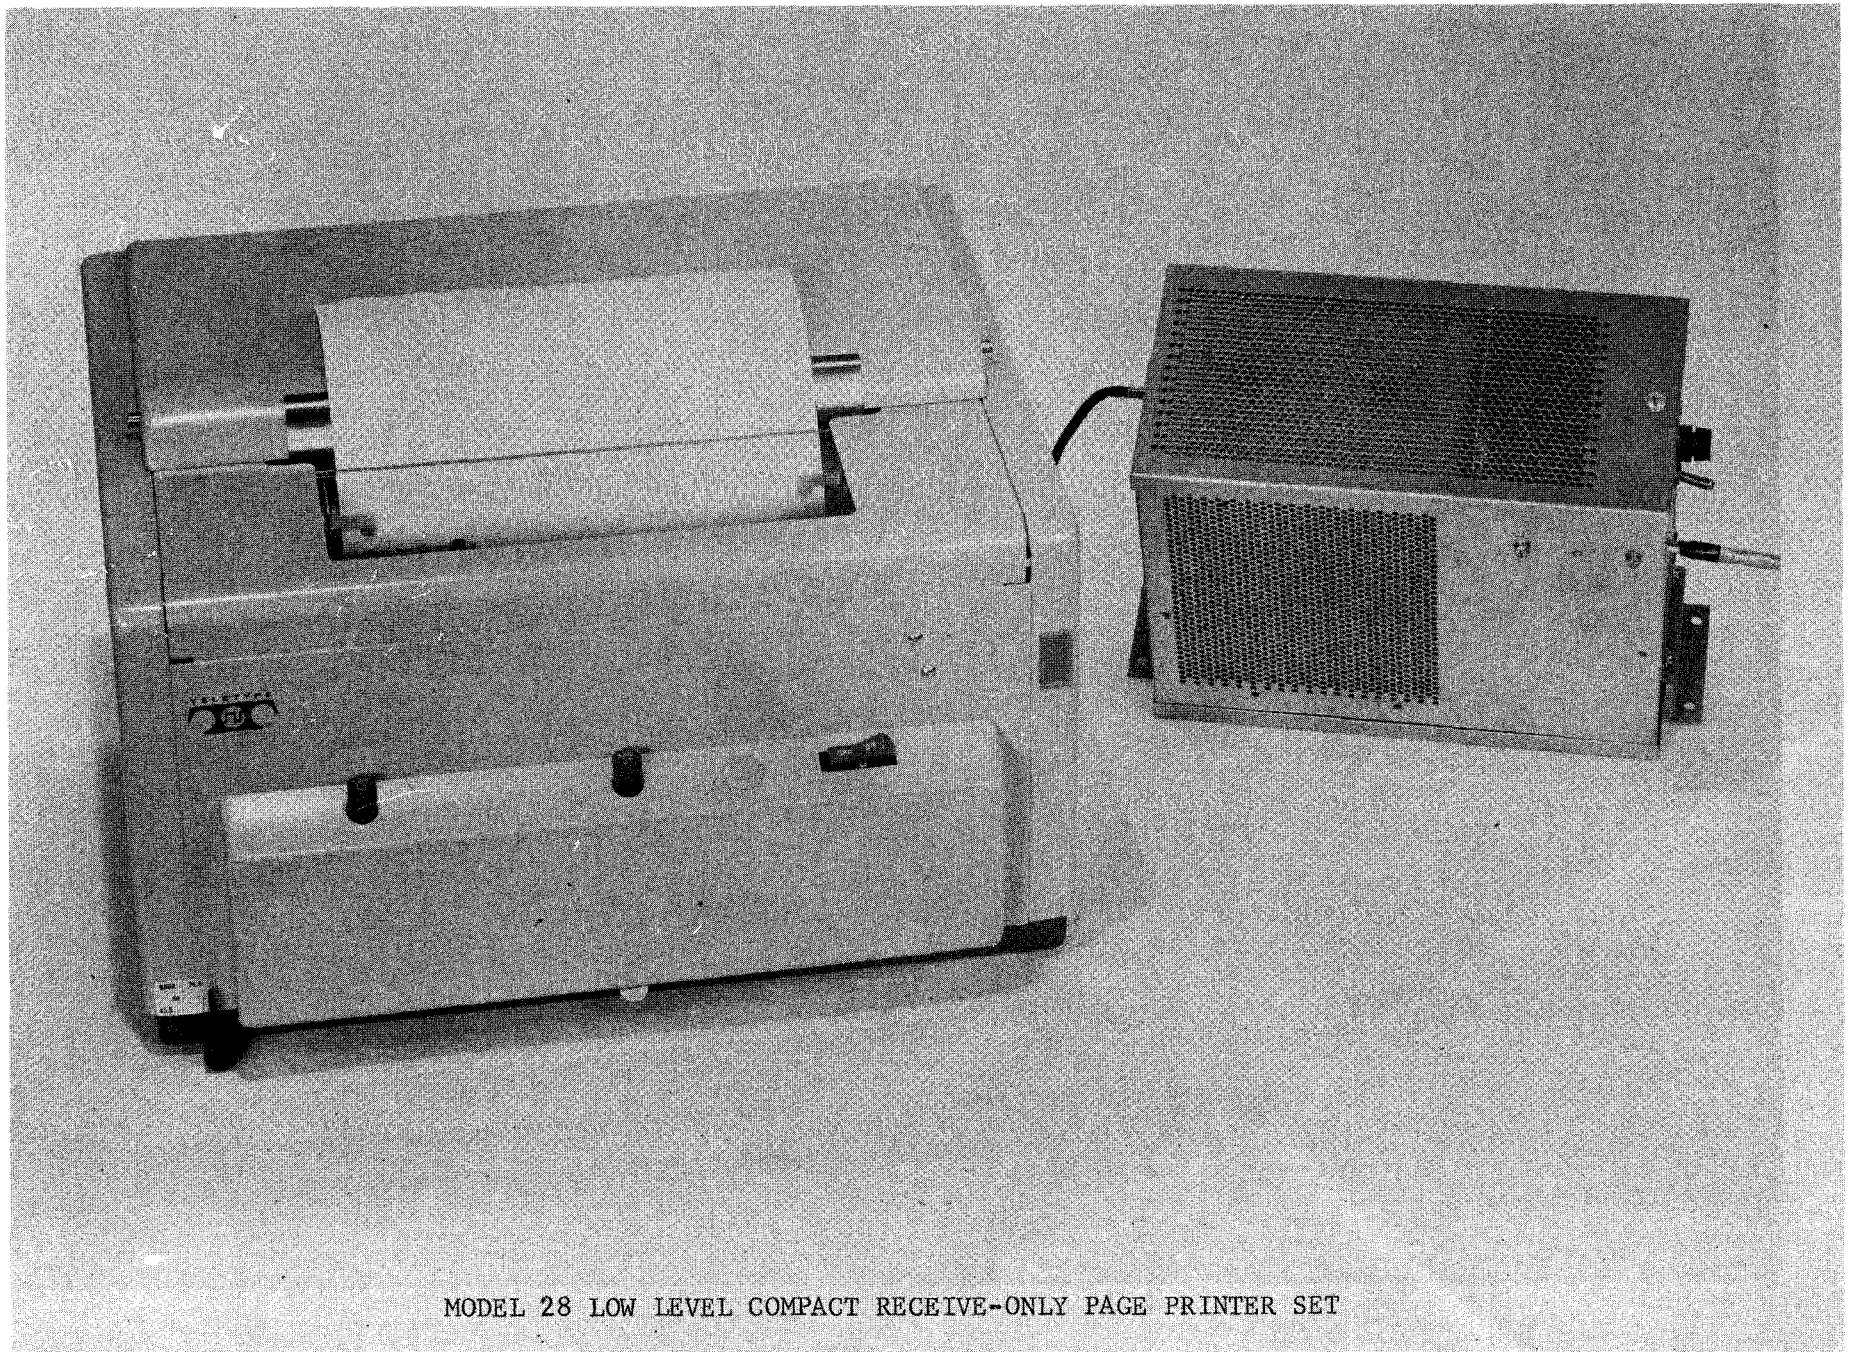

MODEL 28 LOW LEVEL COMPACT RECEIVE-ONLY PAGE PRINTER SET

January 5, 1970

EXHIBIT

AN/UGC-50

TELETYPE CORPORATION MODEL 28
ASSEMBLED LOW-LEVEL RECEIVE-ONLY SET

CODED 28-RFR1000B/013/AVX/BR CONSISTING OF:

LP135BG/AGM TYPING UNIT
28-RFC1000B/013/AVX/BR ASSEMBLED SUB-COMPONENTS C/O:

LPC213BR	COVER, SKIN TIGHT
LPW300BR	PAPER WINDER
325912	CORD W/TERMINALS
LB10/000	BASE, RECEIVE-ONLY
LMU3	MOTOR UNIT
163505	GEAR SET - (75 BAUD)
325910	STRAP ASSEMBLY
324060	ELECTRICAL SERVICE ASSEMBLY
325914	CABLE ASSEMBLY (LP)
325909	CABLE ASSEMBLY, POWER
193950	RACK, COPY DISPLAY
321290	POWER SUPPLY CARD
323810	SELECTOR MAGNET DRIVER CARD
325908	CABLE ASSEMBLY, TYPING UNIT

OPTIONAL

SET OF GEARS

173795	45.5 BAUD - BEX
163504	50.0 BAUD - BCX

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE
CRITICOM TYPE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF ± 6 V STATE IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 75 BAUD SHOWN THE RFR AND RFC CODES
WILL CHANGE.

NOVEMBER 1, 1970

EXHIBIT

AN/UGC-50AY

TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW-LEVEL
RECEIVE-ONLY PAGE PRINTER SET

CODED 28-RFR1000B/013/CAX/BR CONSISTING OF:

LP135BG/AGM TYPING UNIT
28-RFC1000B/013/CAX/BR ASSEMBLED SUB-COMPONENTS C/O:

325912	CORD W/TERMINAL
LPC213BR	COVER
LPW300BR	PAPER WINDER
LB10	BASE
LMU61	MOTOR UNIT
324060	ELECTRICAL SERVICE ASSEMBLY
163505	GEAR SET (75 BAUD)
325910	STRAP ASSEMBLY
325914	CABLE ASSEMBLY (LP)
325909	CABLE ASSEMBLY (POWER)
193950	COPY RACK
321290	POWER SUPPLY CARD
323810	SELECTOR MAGNET DRIVER CARD
325908	CABLE ASSEMBLY

7.00 UNIT CODE
50/60 CYCLE TRIAC CONTROLLED SERIES GOVERNED MOTOR
CRITICOM TYPE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

January 5, 1970

EXHIBIT

AN/UGC-50X

TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW-LEVEL RECEIVE ONLY

PAGE PRINTER SET

CODED 28-RFR/1000B/013/BWX/BR CONSISTING OF:

LP135BG/AGM TYPING UNIT
28-RFC/1000B/013/BWX/BR ASSEMBLED SUB-COMPONENTS C/O:

LPC213BR	COVER, SKIN TIGHT
LPW300BR	PAPER WINDER
325912	CORD W/TERMINALS
LB10/000	BASE, RECEIVE ONLY
LMU38	MOTOR UNIT
312705	SET OF GEARS (75 BAUD)
325910	STRAP ASSEMBLY
324060	ELECTRICAL SERVICE ASSEMBLY
325914	CABLE ASSEMBLY (LP)
325909	CABLE ASSEMBLY POWER
193950	RACK, COPY DISPLAY
321290	POWER SUPPLY CARD
323810	SELECTOR MAGNET DRIVER CARD
325908	CABLE ASSEMBLY, TYPING UNIT

OPTIONAL

SET OF GEARS CONSISTING OF:

312707	45.5 BAUD - BZX
312706	50.0 BAUD - BYX

7.00 UNIT CODE
SYNCHRONOUS 50 CYCLE
CRITICOM TYPE

INCLUDES WIRING THE STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF ± 6 V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 75 BAUD SHOWN THE RFR AND RFC CODES
WILL CHANGE.

September 1, 1970

EXHIBIT

AN/UGC-58

TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW-LEVEL
RACK MOUNTED RECEIVE-ONLY PAGE PRINTER SET

CODED 28-RFR1001B/008/AWX/BR CONSISTING OF:

LP135YD/AGM TYPING UNIT
28-RFC1001B/008/AWX/BR ASSEMBLED SUB-COMPONENTS C/O:

LPC213BR	COVER
LPW300BR	PAPER WINDER
325912	CORD W/TERMINALS
LB10/000	BASE
LMU41	MOTOR UNIT
163505	GEAR SET (75 BAUD)
325910	STRAP ASSEMBLY ELECTRICAL
326471	ELECTRICAL SERVICE ASSEMBLY
325914	CABLE ASSEMBLY (LP)
325909	CABLE ASSEMBLY POWER
193950	RACK COPY DISPLAY
321290	POWER SUPPLY CARD 1/2 AMP
323810	SELECTOR MAGNET DRIVER CARD
325908	CABLE ASSEMBLY TYPING UNIT

ASSEMBLY

OPTIONAL

104986	TUNING FORK
173795	SET OF GEARS (45.5 BAUD)
163504	SET OF GEARS (50.0 BAUD)

7.00 UNIT CODE
50/60 CYCLE SERIES GOVERNED MOTOR
CRITICOM TYPE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

January 5, 1970

EXHIBIT

AN/UGR-8

TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW-LEVEL
FLOOR MODEL RECEIVE-ONLY SET

CODED 28-RFR1002B/012/AVX/BR CONSISTING OF:

LP138 WY/AJG TYPING UNIT
28-RFC1002B/012/AVX/BR ASSEMBLED SUB-COMPONENTS C/O:

LAC227BR	CABINET
LB40	BASE
LESU128	ELECTRICAL SERVICE UNIT
LMU3	MOTOR UNIT
321226	ELECTRICAL SERVICE ASSEMBLY
323810	SELECTOR MAGNET DRIVER CARD
321290	POWER SUPPLY CARD
324149	CONNECTION BOX MOD. KIT
163505	GEAR SET - 75 BAUD
159373	MOD. KIT APPARATUS RACK

ASSEMBLY

OPTIONAL

163504	GEAR SET - 50 BAUD - BCX
173795	GEAR SET - 45.5 BAUD - BEX

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 75 BAUD SHOWN, THE RFR AND RFC CODES
WILL CHANGE.

January 5, 1970

EXHIBIT

AN/UGR-9

TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW-LEVEL
COMPACT RECEIVE-ONLY PAGE PRINTER SET

CODED 28-RFH8000B/003/AAA/BR CONSISTING OF:

321231	ELECTRICAL SERVICE ASSEMBLY
323810	SELECTOR MAGNET DRIVER
321290	REGULATOR ASSEMBLY
LLB5	BASE
LP139WY/AJG	TYPING UNIT
LMU37	MOTOR UNIT
LPC402BR	COVER
145365	GEAR
145366	GEAR

ASSEMBLY

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE
BASE CONTAINS GEAR SHIFT FOR 45.5, 50 AND 75 BAUD SPEEDS

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

January 5, 1970

EXHIBIT

AN/UGR-9X

TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW-LEVEL
COMPACT RECEIVE-ONLY PAGE PRINTER SET

CODED 28-RFH8000B/003/AAB/BR CONSISTING OF:

321231	ELECTRICAL SERVICE ASSEMBLY
323810	SELECTOR MAGNET DRIVER
321290	REGULATOR ASSEMBLY
LLB5	BASE
LP139WY/AJG	TYPING UNIT
LMU51	MOTOR UNIT
LPC402BR	COVER
304669	GEAR
304668	GEAR

ASSEMBLY

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 50 CYCLE
BASE CONTAINS GEAR SHIFT FOR 45.5, 50 AND 75 BAUD SPEEDS

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF ± 6 V STATED IN MIL-STD-188B.

February 20, 1970

EXHIBIT

AN/UGR-16

TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW-LEVEL
COMPACT RECEIVE-ONLY PAGE PRINTER SET

CODED 28-RFH8001B/001/AAA/BR CONSISTING OF:

321231	ELECTRICAL SERVICE ASSEMBLY
323810	SELECTOR MAGNET DRIVER
321290	REGULATOR ASSEMBLY
LLB5	BASE
LP139RE/AJF	TYPING UNIT
LMU37	MOTOR UNIT
LPC402BR	COVER
145365	GEAR
145366	GEAR

ASSEMBLY

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE
BASE CONTAINS GEAR SHIFT FOR 45.5, 50 AND 75 BAUD SPEEDS
WEATHER ARRANGED TYPE BOX

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.



M28 KSR SET (FLOOR CONSOLE)

600405-02



M28 COMPACT SET

620608-64



M28 SEND-RECEIVE RACK MOUNTED SET
(SKIN TIGHT COVER)

601208-25

April 1, 1968

AN/FCC-72AX

TELETYPE MODEL 28 SEND-RECEIVE PAGE PRINTER
SET

LP77YD/AGM	Typing Unit	MX-3311/UG
LK25BRW	Keyboard	
LAC214BR255	Cabinet	CY-4703/FCC-97
173783	Electrical Service Unit	
LMU41	Motor Unit Series Governed	
163505	Gears for 75.0 Baud	
173795	Gears for 45.5 Baud	
104986	Speed Indicator	
154754BR	Sub-Base	

7.00 Unit Code

Shielded signal leads on LP & LK

Series governed motor

Floor console

September 15, 1969

EXHIBIT

AN/FGC-72BX

TELETYPE CORPORATION MODEL 28 ASSEMBLED FLOOR
MOUNTED SEND-RECEIVE PAGE PRINTER SET
CONSISTING OF:

LP77YD/AGM	TYPING UNIT
*LK25BRW	KEYBOARD
*LAC214BR255	CABINET (FLOOR)
*173783	ELECTRICAL SERVICE ASSEMBLY
*LMU41	MOTOR UNIT
*163505	GEAR SET (75 BAUD)
104986	SPEED INDICATOR
154754BR	SUB-BASE
LPW300BR	PAPER WINDER
193950	DISPLAY RACK
173861	DOLLY

*ASSEMBLY

7.00 UNIT CODE
CRITICOM TYPE
50/60 CYCLE SERIES GOVERNED MOTOR

April 1, 1968

AN/FGC-72X

TELETYPE MODEL 28 SEND-RECEIVE RACK MOUNTED
PAGE PRINTER SET

LPC206BR	Cover	CW-568/UG
LK25BRW	Keyboard	MX-3310/UG
LMU4	Motor Unit	
173816BR	Electrical Service Assembly	SB-1410/UG
LP77YD/AGM	Typing Unit	MX-3311/UG
PW201BR	Paper Winder	RL-215/UG
173852	Cable	
163505	Gear Set (75 Baud)	
173851	Cable	
173780	Cable	
104986	Speed Indicator (Tuning Fork)	

7.00 Unit Code
Series governed motor
CRITICOM Type

April 1, 1968

AN/FGC-97

TELETYPE MODEL 28 SEND-RECEIVE PAGE PRINTER SET

LP77YD/AJV	Typing Unit	MX-6933/UG
LK53BRW	Keyboard	MX-6937/FGC-97
LAC214BR255	Cabinet	CY-4703/FGC-97
304206	Electrical Service Assembly	
173705	Modification Kit	
IMU3	Motor Unit	
163505	Gears 75 Baud	
173861	Dolly	
173795	Gears 45.5 Baud	
154754BR	Sub-Base	

7.00 Unit Code

Shielded signal leads on Typing Unit

Signal Generator wired for negative mark

60 cycle synchronous motor

Floor console

April 1, 1968

AN/FGC-97X

TELETYPE MODEL 28 SEND-RECEIVE PAGE
PRINTER SET

LAC214BR255	Cabinet	CY-4703/FG
LP77YD/AJV	Typing Unit	MX-6933/FG
LK53BRW	Keyboard	MX-6937/FG
304206	Service Assembly	
163505	Gear Set	
173795	Gear Set	
LMU41	Motor	PD-18A/U
104986	Tuning Fork	

7.00 Unit code
Series governed motor
Floor console

April 1, 1968

AN/FGC-98X

MODEL 28 SEND-RECEIVE RACK MOUNTED PRINTER SET

LPC206BR	Cover	CW-568/UG
LK25BRW	Keyboard	MX-3310/UG
LMU41	Motor Unit	
173816BR	Electrical Service Assembly	SB-1410/UG
LP77YD/AGM	Typing Unit	MX-3311/UG
PW201BR	Paper Winder	RL-215/UG
173852	Cable	
163505	Gear Set (75 Baud)	
173851	Cable	
173780	Cable	
104986	Speed Indicator	

7.00 Unit code
Series governed motor
CRITICOM Type

April 1, 1968

AN/UGC-19

TELETYPE MODEL 28 RACK-MOUNTED

SEND-RECEIVE PAGE PRINTER SET

LP105RN/AGB	Typing Unit	TT-358/UG
LESU6/119	Electrical Service Unit	SB-408/UG
LK30ARN	Keyboard	TT-357/UG
LMU41	Motor Unit	PD-18A/U
LPC202BR120	Cover	CW-354/UG
173795	Set of Gears (45.5 Baud)	
163504	Set of Gears (50.0 Baud)	
163505	Set of Gears (75.0 Baud)	
104986	Speed Indicator	

7.00 Unit code
Series governed motor
Stepping feature

January 5, 1970

EXHIBIT

AN/UGC-20B

TELETYPE CORPORATION MODEL 28 ASSEMBLED HIGH-LEVEL
COMPACT SEND-RECEIVE PAGE PRINTER SET

CODED: 28-RFH8002A/003/AAA/BR CONSISTING OF:

334439	AMPLIFIER ASSEMBLY
LLK4CRS	KEYBOARD BASE
LP156/WY/AJG	TYPING UNIT
LPC403BR	COVER
LMU37	MOTOR UNIT
145365	GEAR
145366	GEAR
198576	GEAR
198580	GEAR

7.42 UNIT CODE

SYNCHRONOUS MOTOR - 60 CYCLE

GEAR SHIFT FOR 45.5, 50 and 74.2 BAUD SPEEDS

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET CURRENT SIGNAL INTERFACE OF:

HALF DUPLEX:

20-60 ma @ 120 VDC

FULL DUPLEX:

70 microamp @ 1.5 VDC SEND

60 ma @ 40 VDC RECEIVE

April 1, 1968

AN/UGC-22A

TELETYPE MODEL 28 RACK-MOUNTED

KEYBOARD SEND-RECEIVE SET

LP65WY/AJD	Typing Unit	TT-438/UG
LK48BRJ	Keyboard	TT-434/UG
LESU6/119	Electrical Service Unit	SB-408/UG
LMU38	Motor Unit	PD-108/UG
LPC202BR	Cover	CW-354/UG
159660	Set of Gears (45.5 Baud)	
159700	Set of Gears (74.2 Baud)	

7.42 Unit code
50 Cycle synchronous motor

April 1, 1968

AN/UCC-34

TELETYPE MODEL 28 SEND-RECEIVE PAGE PRINTER SET

LF65RE/AJD	Typing Unit	TT-499/UG
LK48ARE	Keyboard	TT-498/UG
LPC202BR	Cover	CW-354/UG
LMU3	Motor Unit	PD-17A/U
LESU6/119	Electrical Service Unit	SB-408/UG
161293	Set of Gears (45.5 Baud)	
152766	Set of Gears (50.0 Baud)	
161295	Set of Gears (74.2 Baud)	

Set same as TT-176C/UG except contains weather character arrangement

7.42 Unit code
60 cycle synchronous motor

September 15, 1969

EXHIBIT

AN/UGC-63

TELETYPE CORPORATION MODEL 28 RACK-MOUNTED
SEND-RECEIVE PAGE PRINTER SET

LPC206BR	COVER	CW-568/UG
LK25BRW	KEYBOARD	MX-3310/UG
LMU3	MOTOR UNIT	PD-17A/U
LP77YD/AGM	TYPING UNIT	MX-3311/UG
LPW300BR	PAPER WINDER	RL-235/UG
*173816BR	PANEL POWER DIST.	SB-1910/UG
163505	GEAR SET (75 BAUD)	
173780	CABLE ASSEMBLY (LMU)	
173851	CABLE ASSEMBLY (LP)	
193950	COPY DISPLAY RACK	

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE
CRITICOM TYPE

(*Does not include power factor correction similar
to TT-307A/UG).

September 15, 1969

EXHIBIT

AN/UGC-79

TELETYPE CORPORATION MODEL 35 ASSEMBLED
SEND-RECEIVE PAGE PRINTER SET

CONSISTING OF:

LP813TD/ATJ
VCL312HF

TYPING UNIT
ASSEMBLED SUB-COMPONENTS

CONSISTING OF:

LK804ATL
LESU309
LAC301HF
195937HF
199328HF
LMU3
161295

KEYBOARD BASE
ELECTRICAL SERVICE UNIT
FLOOR CONSOLE CABINET
PLATE
PANEL WITH CABLE
MOTOR UNIT
GEAR SET (100 WPM)

ASSEMBLY

11.0 UNIT CODE 8-LEVEL
SYNCHRONOUS MOTOR - 60 CYCLE
PRIVATE LINE SET
FRICTION FEED

May 1, 1971

EXHIBIT

AN/UGC-81

TELETYPE CORPORATION MODEL 28
SEND-RECEIVE PAGE PRINTER SET

CONSISTING OF:

LP19RA/AN	TYPING UNIT
LK16ARK	KEYBOARD
LESU7/134	ELECTRICAL SERVICE UNIT
317220	LINE RELAY
LMU3	MOTOR UNIT
153440	UNIVERSAL FUNCTION BAR
161295	GEAR SET (100 WPM)
LAC204BR250	CABINET
153918	SET OF LATCHING PARTS

7.42 UNIT CODE

60 CYCLE SYNCHRONOUS MOTOR

FLOOR CONSOLE

INCLUDES "U" UNIVERSAL CDC TO CALL ALL PRINTERS
INTO PRINT CONDITION WHEN "U" IS RECEIVED.

January 5, 1970

TT-47J/UG

TELETYPE MODEL 28 SEND-RECEIVE PAGE PRINTER SET

*LAC204BR237	Cabinet	CY-2538/UG
*LESU7/147	Electrical Service Unit	SB-964/UG
*LMU3	Motor Unit	PD-17A/U
*LK11BRJ	Keyboard	TT-387/UG
LP14WY/AJG	Typing Unit	TT-437/UG
161293	Set of Gears (45.5 Baud)	
152766	Set of Gears (50.0 Baud)	
*161295	Set of Gears (74.2 Baud)	

*Assembled - one set assembled depending on customer requisition

7.42 Unit code
Synchronous motor
Automatic line feed function in "Stunt Box"
Stepping magnets in keyboard

January 5, 1970

TT-47K/UG

TELETYPE MODEL 28 SEND-RECEIVE PAGE PRINTER SET

LP14WY/AJE	Typing Unit	TT-436/UG
LESU7/147	Electrical Service Unit	SB-964/UG
LK11BRJ	Keyboard	TT-387/UG
LMU3	Motor Unit	PD-17A/U
LAC204BR237	Cabinet	CY-2538/UG
161293	Set of Gears (45.5 Baud)	
161294	Set of Gears (56.9 Baud)	
161295	Set of Gears (74.2 Baud)	

Set same as TT-47J/UG except has reperforator control in
"Stunt Box"

January 5, 1970

TT-47L/UG

TELETYPE MODEL 28 SEND-RECEIVE PAGE
PRINTER SET

LAC204BR237	Cabinet	CY-2538/UG
LK77BRJ	Keyboard	TT-388/UG
LP108WY/AJG	Typing Unit	TT-538/UG
LESU7/147	Electrical Service Unit	SB-964/UG
LMU3	Motor Unit	PD-17A/U
163505	Gear Set (75.0 Baud)	

Synchronous motor
7.00 Unit code
Stepping magnets in keyboard

Same as TT-47H/UG except: Do not use Gear Sets 173795 and 163504. Typing unit is AJG instead of AY.

January 5, 1970

TT-48F/UG

TELETYPE MODEL 28 SEND-RECEIVE PAGE PRINTER SET

*LAC204BR237	Cabinet	CY-2538/UG
*LESU7/147	Electrical Service Unit	SB-964/UG
*LK11BRJ	Keyboard	TT-387/UG
LP14WY/AJG	Typing Unit	TT-437/UG
*LMU41	Motor Unit	PD-18A/U
161293	Set of Gears (45.5 Baud)	
152766	Set of Gears (50.0 Baud)	
*161295	Set of Gears (74.2 Baud)	
104986	Speed Indicator	

*Assembled - one set assembled depending on customer requisition

7.42 Unit code
Series governed motor
Automatic line feed function in "Stunt Box"
Stepping magnets in keyboard

January 5, 1970

TT-48C/UG

TELETYPE MODEL 28 KEYBOARD SEND-RECEIVE SET

LAC204BR237	Cabinet	CY-2538/UG
LESU7/147	Electrical Service Unit	SB-964/UG
LK11BRJ	Keyboard	TT-387/UG
LMU38	Motor Unit	PD-108/UG
LP14WY/AJG	Typing Unit	TT-437/UG
159660	Set of Gears (45.5 Baud)	
159700	Set of Gears (74.2 Baud)	

7.42 Unit code
Synchronous motor (50 cycle)
Automatic line feed function in "Stunt Box"
Stepping magnets in keyboard

January 5, 1970

TT-48J/UG

TELETYPE MODEL 28 SEND-RECEIVE PAGE PRINTER SET

LP14WY/AJE	Typing Unit	TT-436/UG
LAC204BR237	Cabinet	CY-2538/UG
LESU7/147	Electrical Service Unit	SB-964/UG
LMU41	Motor Unit	PD-18A/U
LK11BRJ	Keyboard	TT-387/UG
161293	Set of Gears (45.5 Baud)	
152766	Set of Gears (50.0 Baud)	
161295	Set of Gears (74.2 Baud)	

Set same as TT-48H/UG except contains reperforator control
in the "Stunt Box"

September 15, 1969

EXHIBIT

TT-48K/UG

TELETYPE CORPORATION MODEL 28 KEYBOARD
SEND-RECEIVE PAGE PRINTER SET

LP108RN/AJG	TYPING UNIT
LAC204BR237	CABINET
LESU7/147	ELECTRICAL SERVICE UNIT
LK35ARN	KEYBOARD
LMU38	MOTOR UNIT
321705	GEAR SET (75.0 BAUD)

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 50 CYCLE

STUNT BOX ARRANGEMENT PERMITS LINEFEED CARRIAGE RETURN AND
RESTRICTS LINEFEED ON FOLLOWING TWO OPERATIONS.

SIMILAR TO TT-48D/UG

April 1, 1968

TT-69E/UG

TELETYPE MODEL 28 SEND-RECEIVE PAGE PRINTER SET

*LAC203BR236	Cabinet	CY-2539/UG
*LK49BRJ	Keyboard	TT-387/UG
*LMU3	Motor Unit	PD-17A/U
*LESU7/147	Electrical Service Unit	SB-964/UG
LP14WY/AJG	Typing Unit	TT-437/UG
161293	Set of Gears (45.5 Baud)	
152766	Set of Gears (50.0 Baud)	
*161295	Set of Gears (74.2 Baud)	

*Assembled - one set assembled depending on customer requisition

7.42 Unit code
Synchronous motor
Automatic line feed function in "Stunt Box"
Stepping magnets in keyboard

April 1, 1968

EXHIBIT

TT-69G/UG

TELETYPE CORPORATION M-28 ASSEMBLED KEYBOARD
SEND-RECEIVE PAGE PRINTER SET C/O:

IAC203BR236	Cabinet
LK49BRJ	Keyboard
LMU3	Motor Unit
LESU7/147	Electrical Service Unit
LP14WY/AJE	Typing Unit
161295	Gear Set (74.2 Baud)

7.42 Unit code
Synchronous motor - 60 cycle
Reperforator control in stunt box

April 1, 1968

TT-70E/UG

TELETYPE MODEL 28 SEND-RECEIVE PAGE PRINTER SET

*LAC203BR236	Cabinet	CY-2539/UG
*LESU7/147	Electrical Service Unit	SB-964/UG
*LK49BRJ	Keyboard	TT-387/UG
*LMU41	Motor Unit	PD-18A/U
LP14WY/AJG	Typing Unit	TT-437/UG
104986	Speed Indicator	
161293	Set of Gears (45.5 Baud)	
152766	Set of Gears (50.0 Baud)	
*161295	Set of Gears (74.2 Baud)	

*Assembled - one set assembled depending on customer requisition

7.42 Unit code
Series governed motor
Automatic line feed function in "Stunt Box"
Stepping magnets in keyboard

April 1, 1968

TT-128C/UG

TELETYPE MODEL 28 SEND-RECEIVE PAGE PRINTER SET

LAC204BR237	Cabinet	CY-2538/UG
LESU7/147	Electrical Service Unit	SB-964/UG
LK49ARE	Keyboard	TT-442/UG
LMU3	Motor Unit	PD-17A/U
LP14RE/AJF	Typing Unit	TT-443/UG
161293	Set of Gears (45.5 Baud)	
152766	Set of Gears (50.0 Baud)	
161295	Set of Gears (74.2 Baud)	

7.42 Unit code
Synchronous motor (60 cycle)
Automatic line feed function in "Stunt Box"
Stepping magnets in keyboard
Weather arrangement

April 1, 1968

TT-130C/UG

TELETYPE MODEL 28 SEND-RECEIVE PAGE PRINTER SET

*LAC203BR236	Cabinet	CY-2539/UG
*LESU7/147	Electrical Service Unit	SB-964/UG
*LK49ARE	Keyboard	TT-442/UG
*LMU3	Motor Unit	PD-17A/U
LP14RE/AJF	Typing Unit	TT-443/UG
151293	Set of Gears (45.5 Baud)	
152766	Set of Gears (50.0 Baud)	
*161295	Set of Gears (74.2 Baud)	

*Assembled - one set assembled depending on customer requisition

7.42 Unit code
Synchronous motor
Automatic line feed function in "Stunt Box"
Stepping magnets in keyboard
Weather characters arrangement
Table mounted

April 1, 1968

TT-176B/UG

TELETYPE MODEL 28 SEND-RECEIVE PAGE PRINTER SET

LP105WY/AGB	Typing Unit	TT-358/UG
LK30BRJ	Keyboard	TT-357/UG
LESU6/119	Electrical Service Unit	SE-408/UG
LPG202BR120	Cover	CW-354/UG
LMU3	Motor Unit	FD-17A/U
173795	Set of Gears (45.5 Baud)	
163504	Set of Gears (50.0 Baud)	
163505	Set of Gears (75.0 Baud)	

7.00 Unit code
Synchronous motor (60 cycle)
No automatic line feed function
Stepping magnets in keyboard
Rack mounted (skin-tight cover)

January 5, 1970

TT-176C/UG

TELETYPE MODEL 28 RACK-MOUNTED

SEND-RECEIVE PAGE PRINTER SET

*LPC202BR	Cover	CW-354/UG
*LESU6/119	Electrical Service Unit	SB-408/UG
*LK78BRJ	Keyboard	TT-434/UG
*LMU3	Motor Unit	PD-17A/U
LP65WY/AJD	Typing Unit	TT-438/UG
161293	Set of Gears (45.5 Baud)	
152766	Set of Gears (50.0 Baud)	
*161295	Set of Gears (74.2 Baud)	

*Assembled - one set assembled depending on customer requisition

7.42 Unit code
Synchronous motor
Automatic line feed function in "Stunt Box"
Stepping magnets in keyboard
(Skin-tight cover)

January 5, 1970

TT-234/SGA-3

TELETYPE MODEL 28 SEND-RECEIVE PAGE PRINTER SET

LP14WY/AY	Typing Unit	EX-1115B/UG
*LK9BRJ	Keyboard	MX-1114C/UG
*LESU7/147	Electrical Service Unit	SB-964/UG
*LMU3	Motor Unit	PD-17A/UC
*LAC207BR248	Cabinet	CY-2320/SGA-3
*161294	Set of Gears (75 WPM)	

Optional Items

151060	Set of Gears (60 WPM)
151100	Set of Gears (100 WPM)

*Assembled - one set assembled depending on customer requisition

7.42 Unit code
Synchronous motor (60 cycle)

April 1, 1968

TI-243/FG

TELETYPE MODEL 28 SEND-RECEIVE PAGE PRINTER SET

LF59WY/AFK	Typing Unit	
LK18BRE	Keyboard	
LAC204BR148	Cabinet	
LESU42	Electrical Service Assembly	
LMU3	Motor Unit	PD-17A/U
317220	Line Relay	
161293	Set of Gears (60 wpm)	
161294	Set of Gears (75 wpm)	
161295	Set of Gears (100 wpm)	

Running Spares

(5) 129919	Fuse
(1) 151982	Lamp (Incandescent)
(1) 317220	Line Relay
(1) 7835	Ribbon
(4) 148140	Paper (Single Roll)

7.42 Unit code
Synchronous motor (60 cycle)
Wired for polar operation
Selective calling
Floor console

April 1, 1968

TT-247/FG

MODEL 28 SEND-RECEIVE PAGE PRINTER SET

LP59WY/AFK	Typing Unit	
LK18BRE	Keyboard	
LAC203BR149	Cabinet	
LESU42	Electrical Service Assembly	
LMU3	Motor Unit	PD-17A/U
317220	Line Relay	
161293	Set of Gears (60 wpm)	
161294	Set of Gears (75 wpm)	
161295	Set of Gears (100 wpm)	

Running Spares

(5) 129919	Fuse
151982	Lamp (Incandescent)
153400	Lamp (Incandescent)
317220	Line Relay
7835	Ribbon
(4) 148140	Paper (Single Roll)

Same as TT-243/FG except table console.

January 5, 1970

TT-307A/UG

TELETYPE MODEL 28 RACK-MOUNTED

SEND-RECEIVE PAGE PRINTER SET

LPC206BR	Cover	CW-568/UG
LK25BSS	Keyboard	MX-3310/UG
LMU3	Motor Unit	PD-17A/U
LP77BG/AGM	Typing Unit	MX-3311/UG
LPW300BR	Paper Winder	RL-235/UG
173395BR	Electrical Service Assembly	SB-1226/UG
193950	Copy Display Rack	
163505	Set of Gears (75.0 Baud)	
173851	Cable Assembly	
173852	Cable Assembly	
173780	Cable Assembly	
<u>Optional Item</u>		
173795	Set of Gears (45.5 Baud)	

7.00 Unit code
Synchronous motor (60 cycle)
Automatic line feed function in "Stunt Box"
CRITICOMM Type
Same as TT-307/UG except LPW300BR replaces PW201BR

April 1, 1968

TT-307B/UG

TELETYPE MODEL 28 SEND-RECEIVE SET

LPC206BR	Cover	CW-568/UG
LK51BRV	Keyboard	TT-503/UG
LMU3	Motor Unit	PD-17A/U
LP77YD/AGM	Typing Unit	MX-3311/UG
LPW300BR	Paper Winder	RL-235/UG
310174	Electrical Service Assembly	SB-2620/UG
173852	Cable Assembly	
193950	Copy Display Rack	
183505	Set of Gears (75 Baud)	
173851	Cable Assembly	
173780	Cable Assembly	

Set same as TT-307A/UG except it includes two tube drivers in electrical service assembly and gold plated contacts in keyboard

April 1, 1968

TT-341A/UG

TELETYPE MODEL 28 RACK MOUNTED
SEND-RECEIVE PAGE PRINTER

LPC206BR	Cover	CW-568/UG
LK25BRW	Keyboard	MX-3310/UG
LMU41	Motor Unit	PD-18A/U
173395	Electrical Service Unit	SB-1226/UG
LP77YD/AGM	Typing Unit	MX-3311/UG
LPW300BR	Paper Winder	RL-235/UG
173852	Cable	
163505	Set of Gears (75 Baud)	
173851	Cable	
173780	Cable	
104986	Speed Indicator	

7.00 Unit Code
Series governed motor
CRITICOM Type

April 1, 1968

TT-341B/UG

TELETYPE MODEL 28 SEND-RECEIVE RACK
MOUNTED PAGE PRINTER SET

LPC206BR	Cover	CW-568/UG
LK25BRW	Keyboard	MX-3310/UG
LMU41	Motor	PD-18A/U
173395BR	Electrical Service Unit	SB-1226/UG
LP77YD/AGM	Typing Unit	MX-3311/UG
173852	Cable	
163505	Gear (75.0 Baud)	
173851	Cable	
173780	Cable	
173795	Gear Set (45.5 Baud)	
163504	Gear Set (50.0 Baud)	

7.00 Unit Code
Series governed motor
W/O paper winder

January 5, 1970

EXHIBIT


TT-341C/UG

TELETYPE CORPORATION MODEL 28 ASSEMBLED RACK
MOUNTED SEND-RECEIVE PAGE PRINTER SET
CONSISTING OF :

LPC206BR	COVER (SKIN TIGHT)
*LK25BSS	KEYBOARD
*LMU41	MOTOR UNIT
173395BR	ELECTRICAL SERVICE ASSEMBLY
LP77BG/AGM	TYPING UNIT
LPW300BR	PAPER WINDER
*173852	CABLE
*163505	GEAR SET (75 BAUD)
173851	CABLE
173780	CABLE
104986	TUNING FORK
193950	DISPLAY RACK

*ASSEMBLY

7.00 UNIT CODE
CRITICOM TYPE
50/60 CYCLE SERIES GOVERNED MOTOR
(SIMILAR TO TT-307A/UG EXCEPT SERIES GOVERNED MOTOR)

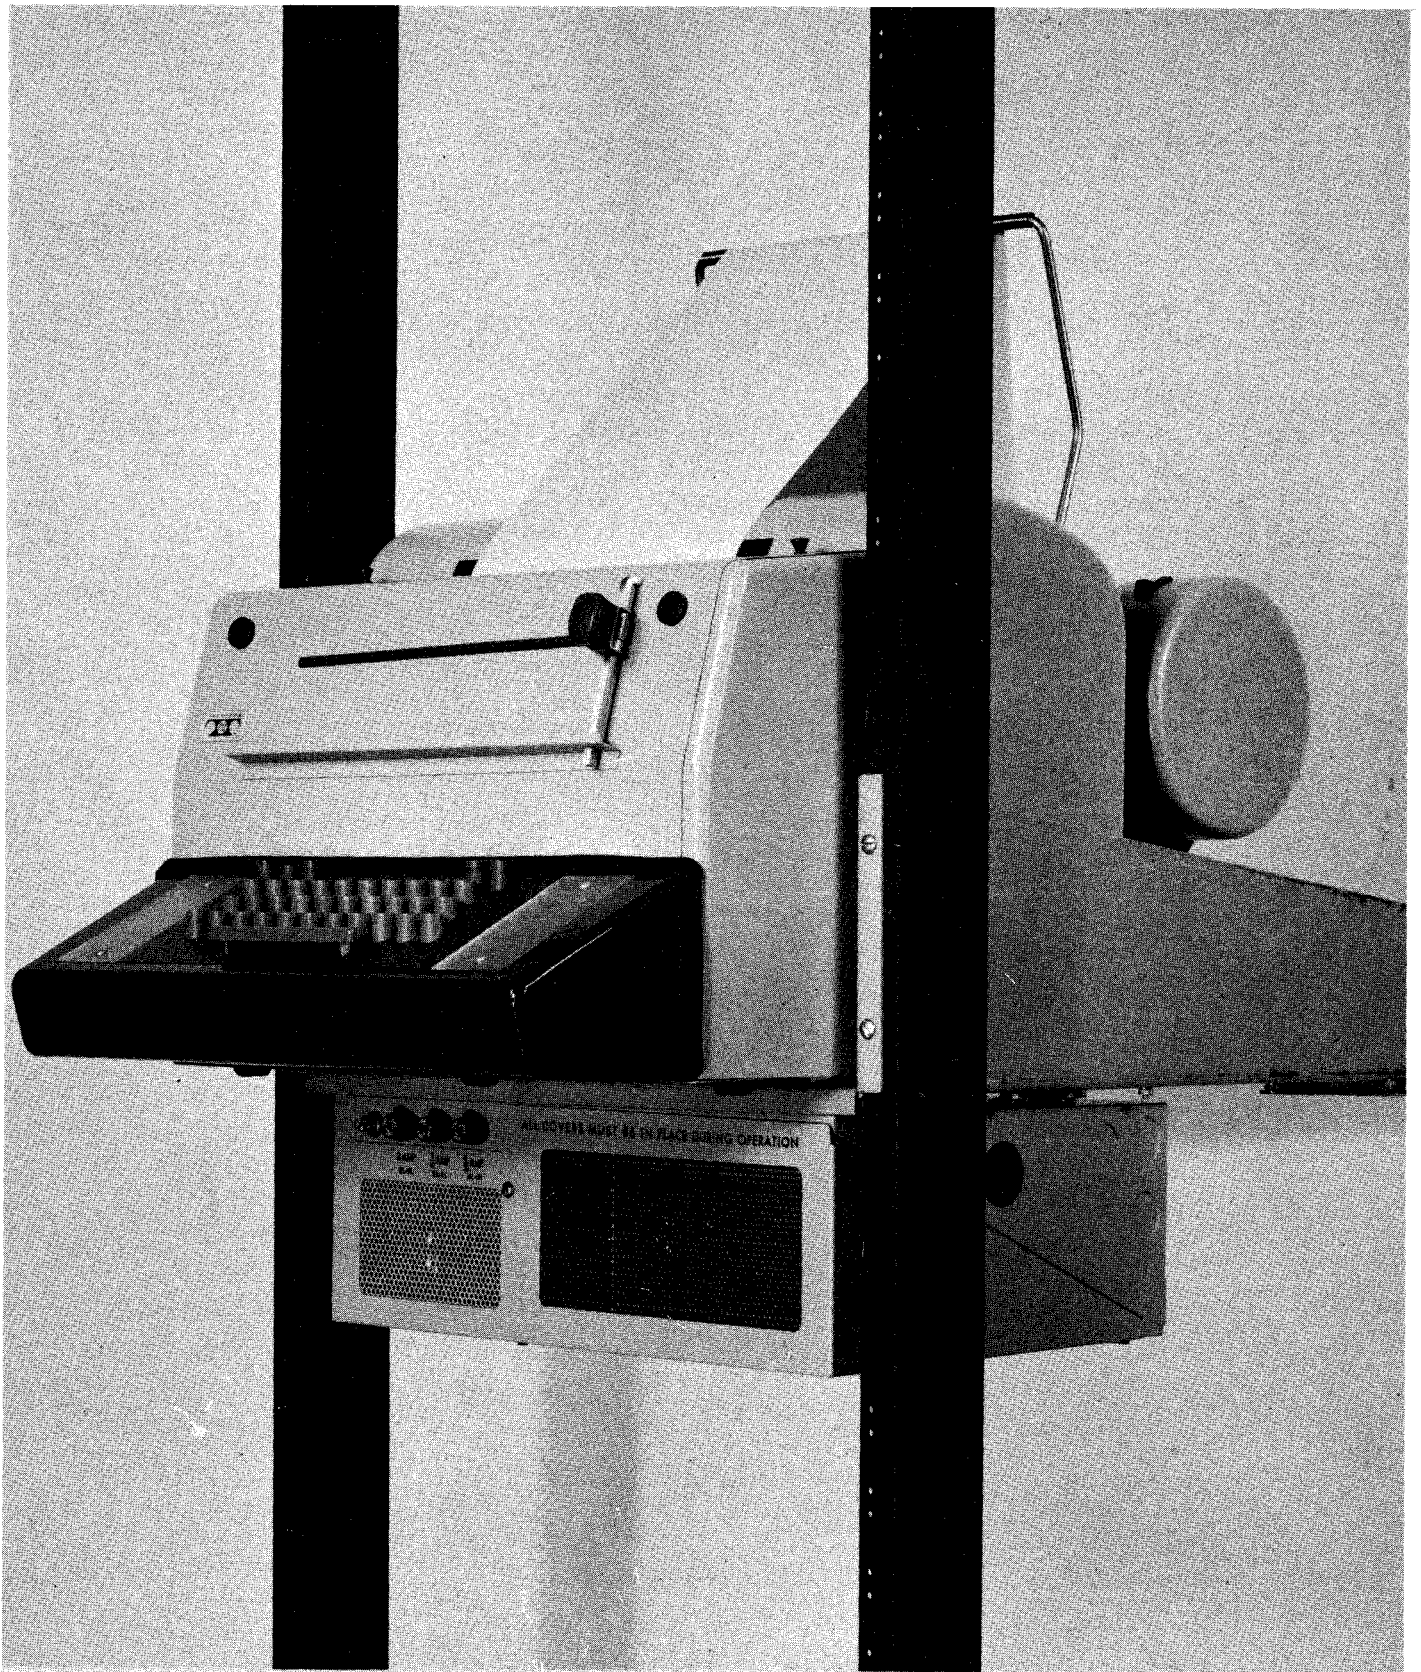

MODEL 28 LOW LEVEL KEYBOARD SEND-RECEIVE SET (RACK MOUNTED)

February 1, 1970

AN/FGC-148

TELETYPE CORPORATION M-28 ASSEMBLED
LOW-LEVEL KEYBOARD SEND-RECEIVE SET

CODED 28-RFK2003B/009/AVX/BR CONSISTING OF:

LP135YD/AGM	TYPING UNIT
28-RFC2002B/009/AVX/BR CONSISTING OF:	ASSEMBLED SUB-COMPONENTS
LAC230BR	CABINET
LK61BRW	KEYBOARD
LMU3	MOTOR UNIT
LESU131	ELECTRICAL SERVICE ASSEMBLY
163505	GEAR SET (75 BAUD)
303142	KEYER CARD
323810	SELECTOR MAGNET DRIVER
321991	CLUTCH MAGNET DRIVER
(2) 321290	POWER SUPPLY CARD
323820	ELECTRICAL SERVICE ASSEMBLY (SIGNAL)
321225	ELECTRICAL SERVICE ASSEMBLY (CLUTCH)
324149	MODIFICATION KIT TO ADD CONN. BOX

OPTIONAL ITEMS

173795	GEAR SET 45.5 BAUD
154754	SUB-BASE

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD OF THE
75 BAUD SHOWN, THE RFX AND RFC CODES WILL CHANGE.

January 5, 1970

EXHIBIT

AN/UGC-47

TELETYPE CORPORATION MODEL 28 ASSEMBLED
LOW-LEVEL KEYBOARD SEND-RECEIVE SET

CODED 28-RFK2002B/012/AVX/BR CONSISTING OF:

LP138WY/AJG	TYPING UNIT
28-RFC2001B/012/AVX/BR	ASSEMBLED SUB-COMPONENTS C/O:
324149	MODIFICATION KIT, CONNECTION BOX
LAC227BR	CABINET
LESU128	ELECTRICAL SERVICE UNIT
LK61BRJ	KEYBOARD
323820	ELECTRICAL SERVICE ASSEMBLY (SIGNAL)
321225	ELECTRICAL SERVICE ASSEMBLY (CLUTCH)
LMU3	MOTOR UNIT
163505	SET OF GEARS - 75 BAUD
323810	SELECTOR MAGNET DRIVER CARD
303142	LOW LEVEL KEYS CARD
321991	CLUTCH MAGNET DRIVER CARD
(2) 321290	POWER SUPPLY CARD

OPTIONAL

173795	SET OF GEARS (45.5 BAUD) - BEX
163504	SET OF GEARS (50.0 BAUD) - BCX

7.00 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR
FLOOR MOUNTED CONSOLE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 75 BAUD SHOWN, THE RFK AND RFC CODES
WILL CHANGE.

January 5, 1970

EXHIBIT

AN/UGC-47X

TELETYPE CORPORATION MODEL 28 ASSEMBLED
LOW-LEVEL KEYBOARD SEND-RECEIVE SET

CODED 28-RFK2002B/012/AWX/BR CONSISTING OF:

LP138WY/AJG TYPING UNIT
28-RFC2001B/012/AWX/BR ASSEMBLED SUB-COMPONENTS C/O:

324149	MODIFICATION KIT, CONNECTION BOX
LAC227BR	CABINET
LESU128	ELECTRICAL SERVICE UNIT
LK61BRJ	KEYBOARD
323820	ELECTRICAL SERVICE ASSEMBLY (SIGNAL)
321225	ELECTRICAL SERVICE ASSEMBLY (CLUTCH)
LMU41	MOTOR UNIT
163505	SET OF GEARS - 75 BAUD
323810	SELECTOR MAGNET DRIVER CARD
303142	LOW-LEVEL KEYSER CARD
321991	CLUTCH MAGNET DRIVER CARD
(2) 321290	POWER SUPPLY CARD

OPTIONAL

SET OF GEARS

173795	SET OF GEARS (45.5 BAUD) - BFX
163504	SET OF GEARS (50.0 BAUD) - BDX

7.00 UNIT CODE
SERIES GOVERNED MOTOR - 50/60 CYCLE
FLOOR MOUNTED CONSOLE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 75 BAUD SHOWN, THE RFK AND RFC CODES
WILL CHANGE.

January 5, 1970

EXHIBIT

AN/UGC-51

TELETYPE CORPORATION MODEL 28
ASSEMBLED LOW-LEVEL KEYBOARD SEND-RECEIVE SET

CODED 28-RFK2000B/013/AVX/BR CONSISTING OF:

LP135BG/AGM TYPING UNIT
28-RFC2000B/013/AVX/BR ASSEMBLED SUB-COMPONENTS C/O:

LPC213BR	COVER, SKIN TIGHT
LPW300BR	PAPER WINDER
325912	CORD W/TERMINALS
LK59BSS	KEYBOARD
LMU3	MOTOR UNIT
163505	SET OF GEARS (75 BAUD)
325910	STRAP ASSEMBLY
324061	ELECTRICAL SERVICE ASSEMBLY
325914	CABLE ASSEMBLY (LP)
325915	CABLE ASSEMBLY (LK)
325913	CABLE ASSEMBLY, KEYBOARD
193950	RACK, COPY DISPLAY
303142	LOW-LEVEL KEYS CARD
(2) 321290	POWER SUPPLY CARD
321991	CLUTCH MAGNET DRIVER CARD
323810	SELECTOR MAGNET DRIVER CARD
325908	CABLE ASSEMBLY, TYPING UNIT

OPTIONAL

SET OF GEARS

173795	45.5 BAUD - BEX
163504	50.0 BAUD - BCX

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE
CRITICOM TYPE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF ± 6 V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 75 BAUD SHOWN THE RFK AND RFC CODES
WILL CHANGE.

NOVEMBER 1, 1970

EXHIBIT

AN/UGC-51AY

TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW-LEVEL
KEYBOARD SEND-RECEIVE SET

CODED 28-RFK2000B/013/CAX/BR CONSISTING OF:

LP135BG/AGM	TYPING UNIT
28-RFC2000B/013/CAX/BR	ASSEMBLED SUB-COMPONENTS C/O:
LP213BR	COVER, SKIN TIGHT
LPW300BR	PAPER WINDER
325912	CORD W/TERMINALS
LK59BSS	KEYBOARD
LMU61	MOTOR UNIT
163505	SET OF GEARS (75 BAUD)
325910	STRAP ASSEMBLY
324061	ELECTRICAL SERVICE ASSEMBLY
325914	CABLE ASSEMBLY (LP)
325915	CABLE ASSEMBLY (LK)
325913	CABLE ASSEMBLY, KEYBOARD
193950	RACK, COPY DISPLAY
303142	LOW-LEVEL KEYS CARD
(2) 321290	POWER SUPPLY CARD
321991	CLUTCH MAGNET DRIVER CARD
323810	SELECTOR MAGNET DRIVER CARD
325908	CABLE ASSEMBLY, TYPING UNIT

7.00 UNIT CODE
50/60 CYCLE TRIAC CONTROLLED
SERIES GOVERNED MOTOR
CRITICOM TYPE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 75 BAUD SHOWN, THE RFK AND RFC CODES WILL CHANGE.

January 5, 1970

EXHIBIT

AN/UGC-51X

TELETYPE CORPORATION MODEL 28
ASSEMBLED LOW-LEVEL KEYBOARD SEND-RECEIVE SET

CODED 28-RFK2000B/013/BWX/BR CONSISTING OF:

LP135BG/AGM	TYPING UNIT
28-RFC2000B/013/BWX/BR ASSEMBLED SUB-COMPONENTS C/O:	
LPC213BR	COVER, SKIN TIGHT
LPW300BR	PAPER WINDER
325912	CORD W/TERMINALS
LK59BSS	KEYBOARD
LMU38	MOTOR UNIT
312705	SET OF GEARS (75 BAUD)
325910	STRAP ASSEMBLY
324061	ELECTRICAL SERVICE ASSEMBLY
325914	CABLE ASSEMBLY (LP)
325915	CABLE ASSEMBLY (LK)
325913	CABLE ASSEMBLY, KEYBOARD
193950	RACK, COPY DISPLAY
303142	LOW-LEVEL KEYS CARD
(2) 321290	POWER SUPPLY CARD
321991	CLUTCH MAGNET DRIVER CARD
323810	SELECTOR MAGNET DRIVER CARD
325908	CABLE ASSEMBLY, TYPING UNIT

OPTIONAL

SET OF GEARS

312707	45.5 BAUD - BZX
312706	50.0 BAUD - BYX

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 50 CYCLE
CRITICOM TYPE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 75 BAUD SHOWN THE RFK AND RFC CODES
WILL CHANGE.

January 5, 1970

EXHIBIT

AN/UGC-51Y

TELETYPE CORPORATION MODEL 28 ASSEMBLED
LOW-LEVEL KEYBOARD SEND-RECEIVE SET

CODED 28-RFK2000B/013/AWX/BR CONSISTING OF:

LP135BG/AGM	TYPING UNIT
28-RFC2000B/013/AWX/BR ASSEMBLED	SUB-COMPONENTS C/O:
LPC213BR	COVER, SKIN TIGHT
LPW300BR	PAPER WINDER
325912	CORD W/TERMINALS
LK59BSS	KEYBOARD
LMU41	MOTOR UNIT
163505	SET OF GEARS (75 BAUD)
325910	STRAP ASSEMBLY
324061	ELECTRICAL SERVICE ASSEMBLY
325914	CABLE ASSEMBLY (LP)
325915	CABLE ASSEMBLY (LK)
325913	CABLE ASSEMBLY, KEYBOARD
193950	RACK, COPY DISPLAY
303142	LOW-LEVEL KEYS CARD
(2) 321290	POWER SUPPLY CARD
321991	CLUTCH MAGNET DRIVER CARD
323810	SELECTOR MAGNET DRIVER CARD
325908	CABLE ASSEMBLY, TYPING UNIT

OPTIONAL

SET OF GEARS

173795	45.5 BAUD - BFX
163504	50.0 BAUD - BDX

7.00 UNIT CODE
SERIES GOVERNED MOTOR - 50/60 CYCLE
CRITICOM TYPE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 75 BAUD SHOWN, THE RFK AND RFC CODES
WILL CHANGE.

September 1, 1970

EXHIBIT

AN/UGC-55

TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW-LEVEL
RACK MOUNTED SEND-RECEIVE PAGE PRINTER SET

CODED 28 - RFK2001B/009/AWX/BR CONSISTING OF:

LP135YD/AGM TYPING UNIT
28-RFC2003B/009/AWX/BR ASSEMBLED SUB-COMPONENTS C/O:

LPC213BR	COVER (SKIN TIGHT)
LPW300BR	PAPER WINDER
325912	CORD W/TERMINALS
LK59BRW	KEYBOARD
LMU41	MOTOR UNIT
163505	GEAR SET (75 BAUD)
325910	STRAP ASSEMBLY ELECTRICAL
325918	ELECTRICAL SERVICE ASSEMBLY
325914	CABLE ASSEMBLY (LP)
325915	CABLE ASSEMBLY (LK)
325913	CABLE ASSEMBLY KEYBOARD
193950	RACK COPY DISPLAY
303142	LOW LEVEL KEYS CARD
(2) 321290	POWER SUPPLY CARD
321991	CLUTCH MAGNET DRIVER CARD
323810	SELECTOR MAGNET DRIVER CARD
325908	CABLE ASSEMBLY, TYPING UNIT

ASSEMBLY

OPTIONAL

104986	TUNING FORK
173795	SET OF GEARS (45.5 BAUD)
163504	SET OF GEARS (50.0 BAUD)

7.00 UNIT CODE
50/60 CYCLE SERIES GOVERNED MOTOR
CRITICOM TYPE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

January 5, 1970

EXHIBIT

AN/UGC-60

TELETYPE CORPORATION M-28 ASSEMBLED LOW-LEVEL
FLOOR MODEL KEYBOARD SEND-RECEIVE SET

CODED 28-RFK2001A/012/AAX/BR CONSISTING OF:

LP134_{WY}/AJG TYPING UNIT
28-RFC2001A/012/AAX/BR ASSEMBLED SUB-COMPONENTS C/O:

LAC227BR	CABINET
LESU128	ELECTRICAL SERVICE UNIT
LK73BRJ	KEYBOARD
LMU3	MOTOR UNIT
323820	ELECTRICAL SERVICE ASSEMBLY (SIGNAL)
321225	ELECTRICAL SERVICE ASSEMBLY (CLUTCH)
324149	MOD. KIT CONNECTION BOX
303142	KEYER CARD
323810	SELECTOR MAGNET DRIVER CARD
321991	CLUTCH MAGNET DRIVER CARD
(2) 321290	POWER SUPPLY CARD
161295	GEAR SET (74.2 BAUD)
ASSEMBLY	

OPTIONAL

194927	GEAR SET 50 BAUD - AEX
161293	GEAR SET 45.5 BAUD - AGX

7.42 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF ± 6 V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 74.2 BAUD SHOWN THE RFK AND RFC CODES
WILL CHANGE.

January 5, 1970

EXHIBIT

AN/UGC-77

TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW-LEVEL
COMPACT SEND-RECEIVE PAGE PRINTER SET

CODED 28-RFH8001A/003/AAA/BR CONSISTING OF:

323120	ELECTRICAL SERVICE ASSEMBLY (CMD)
323121	ELECTRICAL SERVICE ASSEMBLY (SMD)
(2) 321290	POWER SUPPLY CIRCUIT CARD
333069	CLUTCH MAGNET DRIVER CARD
323130	KEYER CIRCUIT CARD
323810	SELECTOR MAGNET DRIVER CARD

28-RFC8001A/003/AAA/BR CONSISTING OF:

LLK4CRS	KEYBOARD BASE
LP156WY/AJG	TYPING UNIT
LPC403BR	COVER
LMU37	MOTOR UNIT
145365	GEAR
145366	GEAR
198576	GEAR
198580	GEAR

ASSEMBLY

7.42 UNIT CODE

SYNCHRONOUS MOTOR - 60 CYCLE

GEAR SHIFT FOR 45.5, 50 AND 74.2 BAUD SPEEDS

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
FF \pm 6V STATED IN MIL-STD-188B.

November 1, 1970

EXHIBIT

AN/UGC-91

TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW-LEVEL
COMPACT SEND-RECEIVE PAGE PRINTER SET

CODED 28-RFH8001A/001/AAA/BR CONSISTING OF:

	323120	ELECTRICAL SERVICE ASSEMBLY (CMD)
	323121	ELECTRICAL SERVICE ASSEMBLY (SMD)
(2)	321290	POWER SUPPLY CIRCUIT CARD
	333069	CLUTCH MAGNET DRIVER CARD
	323130	KEYER CIRCUIT CARD
	323810	SELECTOR MAGNET DRIVER CARD

28-RFC8001A/001/AAA/BR CONSISTING OF:

LLK4CRM	KEYBOARD BASE
LP156RE/AJG	TYPING UNIT
LPC403BR	COVER
LMU37	MOTOR UNIT
145365	GEAR
145366	GEAR
198576	GEAR
198580	GEAR

ASSEMBLY

7.42 UNIT CODE - WEATHER ARRANGEMENT
SYNCHRONOUS MOTOR - 60 CYCLE
GEAR SHIFT FOR 45.5, 50 AND 74.2 BAUD SPEEDS

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
F \pm 6V STATED IN MIL-STD-188B.

April 1, 1968

TT-253A/UG

TELETYPE MODEL 28 SEND-RECEIVE TYPING REPERFORATOR SET

LPR53BRP	Typing Reperforator
LTRK5ARN	Keyboard
LSRC20OBR	Cover
LMU3	Motor Unit
173795	Set of Gears (45.5 Baud)
163504	Set of Gears (50.0 Baud)
163505	Set of Gears (75.0 Baud)
192999	Modification Kit to provide vacuum chad disposal

7.00 Unit code
Synchronous motor - 60 cycle
Stepping Magnets in Keyboard
Fully perforated tape output

January 5, 1970

TT-253C/UG

TELETYPE MODEL 28 SEND-RECEIVE TYPING REPERFORATOR SET

LPR53BRP	Typing Reperforator
LTRK6BRJ	Keyboard
LSRC200BR	Cover
LMU3	Motor Unit
161293	Set of Gears (45.5 Baud)
152766	Set of Gears (50 0 Baud)
161295	Set of Gears (74.2 Baud)
192999	Modification Kit to add vacuum chad disposal

7.42 Unit Code
Synchronous motor (60 cycle)
Stepping Magnets in Keyboard
Fully perforated tape output

January 5, 1970


TT-292A/UG

TELETYPE MODEL 28

SEND-RECEIVE TYPING REPERFORATOR

LPR53BRP	Typing Reperforator
LTRK6BRJ	Keyboard
LSRC200BR	Cover
LMU38	Motor Unit
159660	Set of Gears (60 WPM)
159700	Set of Gears (100 WPM)
192999	Modification Kit to provide vacuum chad disposal

7.42 Unit Code
50 - cycle synchronous motor
Stepping Magnets in Keyboard
Fully perforated tape output

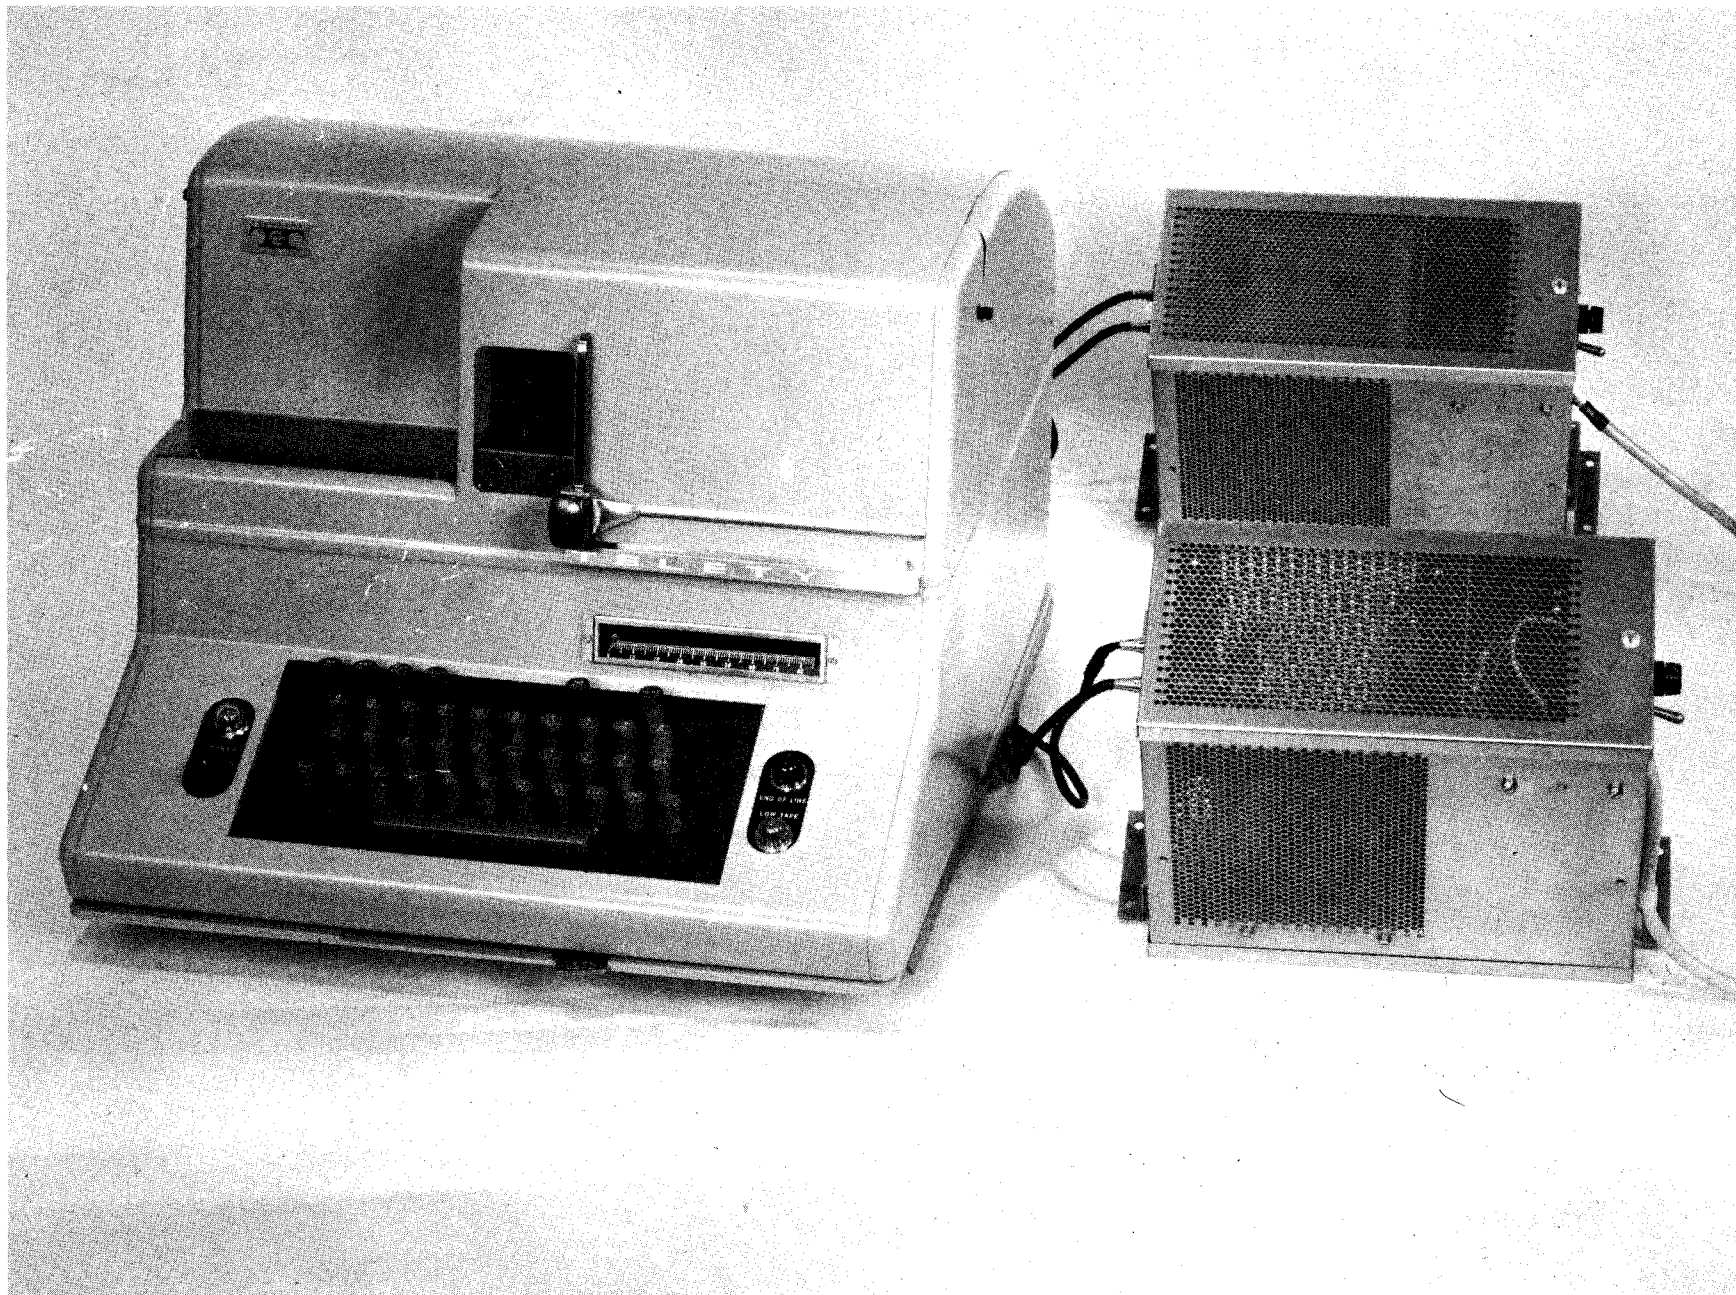

MODEL 28 LOW LEVEL KEYBOARD SEND-RECEIVE TYPING REPERFORATOR SET

January 5, 1970

EXHIBIT

AN/UGC-78

TELETYPE CORPORATION M-28 ASSEMBLED LOW-LEVEL TABLE
MODEL SEND-RECEIVE TYPING REPERFORATOR SET

CODED 28-RFP6200A/012/AAX/BR CONSISTING OF:

LPR83BRP	TYPING REPERFORATOR
323813	ELECTRICAL SERVICE ASSEMBLY (SIGNAL)
321230	ELECTRICAL SERVICE ASSEMBLY (CLUTCH)
303142	KEYER CARD
323810	SELECTOR MAGNET DRIVER CARD
321991	CLUTCH MAGNET DRIVER CARD
(2) 321290	POWER SUPPLY CARD
28-RFC6200A/012/AAX/BR	ASSEMBLED SUB-COMPONENTS C/O:
LTRK11BRJ	KEYBOARD
LMU3	MOTOR UNIT
LSRC200BR	COVER
192999	VACUUM CHAD DISPOSAL MODIFICATION KIT
161295	GEAR SET 74.2 BAUD


OPTIONAL

194927	GEAR SET 50 BAUD - AEX
161293	GEAR SET 45.5 BAUD - AGX

7.42 UNIT CODE
FULLY PERFORATED TAPE
SYNCHRONOUS MOTOR - 60 CYCLE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF ± 6 V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 74.2 BAUD SHOWN THE RFP AND RFC CODES
WILL CHANGE.

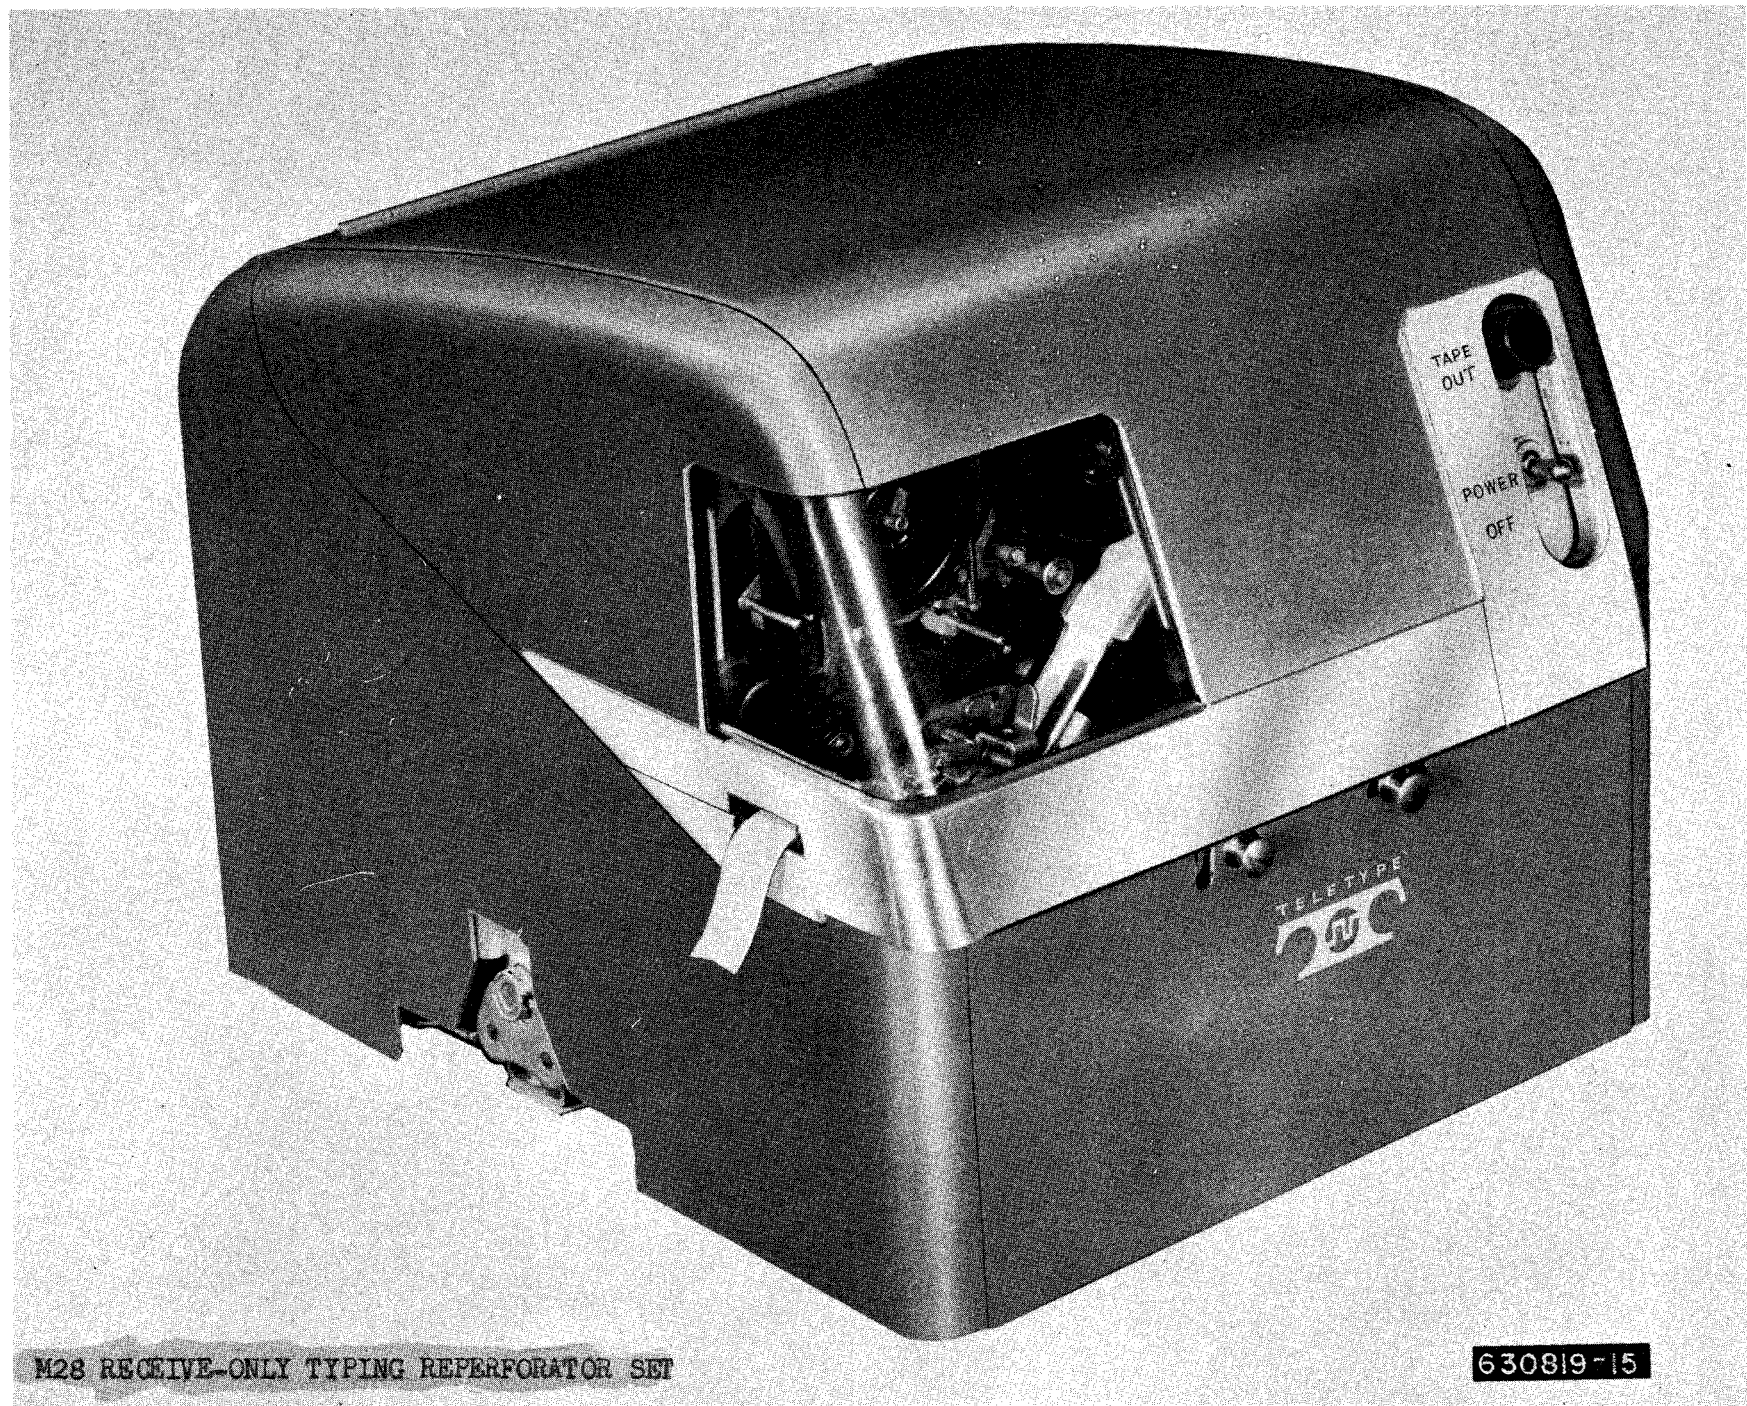

M28 RECEIVE-ONLY TYPING REPERFORATOR SET

630819-15

September 15, 1969

AN/UGC-70

TELETYPE CORPORATION MODEL 28
RECEIVE-ONLY TYPING REPERFORATOR SET

VSL569BR SET CONSISTING OF:

LRC200BR	COVER	
VCL561BR	ASSEMBLED RECEIVE-ONLY TYPING REPERFORATOR	C/O:
LPR30	BASE	
LPR55BRP	TYPING REPERFORATOR	
LMU3	MOTOR	PD-17A/U
179252	MOD KIT (CHAD CHUTE)	
161656	GEAR SET - 100 WPM	

VCL562BR RECEIVE-ONLY TABLE CONSISTING OF:

LT200BR	TABLE	
LESU96	ELECTRICAL SERV. ASSEM.	SB-2611/UC
176615	MOD KIT (CHAD CONT.)	
159373	MOD KIT (MTG. RACK)	
161829	MOD KIT (LESU MTG.)	

7.42 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE

April 1, 1968

AN/UGR-2

TELETYPE MODEL 28 MINIATURIZED

RECEIVE-ONLY TYPING REPERFORATOR SET

LPR40AWA	Typing Reperforator
LRC205BR	Cover
LRB31	Base
LMU24	Motor Unit
174459	Sliding Base
310174	Electrical Service Assembly

7.42 Unit Code
60 cycle synchronous motor
Chadless tape output

Set same as TT-192A/UG except includes electrical service
assembly (equipped with two tube drivers)

September 15, 1969

EXHIBIT

TT-192C/UG

TELETYPE CORPORATION MODEL 28 RECEIVE-ONLY
TYPING REPERFORATOR SET (COMPACT VERSION)
CONSISTING OF:

VSL508BR CONSISTING OF:

LPR62BRP	TYPING REPERFORATOR
LRB62	BASE
LMU56	MOTOR UNIT
LRC211BR	COVER
310051	MOUNTING PLATE
123769	FAN
310056	CASTING ASSEMBLY
310055	EXTENSION
310054	CHUTE ASSEMBLY
174459	MOD, KIT TO PROVIDE SLIDING BASE
ASSEMBLY	

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE
FULLY PERFORATED TAPE OUTPUT W/VACUUM CHAD REMOVAL FEATURE
BASE INCLUDES GEAR SHIFT FOR 45.5, 50 AND 75 BAUD

April 1, 1968


TT-274B/UG

TELETYPE MODEL 28 SELF-CONTAINED RECEIVE-ONLY


TYPING REPERFORATOR SET

LRC202BR	Cover	
LPR35BRP	Typing Reperforator	TT-315/UG
LRB49	Base	
LMU41	Motor	PD-18A/U
178917	S.O.P. (Manual Backspace)	
173395BR	Service Assembly	
179252	S.O.P. (Chad Disposal)	

7.42 Unit Code
Series governed motor
Gear Shift 45.5, 50 and 74.2 Baud
Fully Perforated Tape Output
Std. size

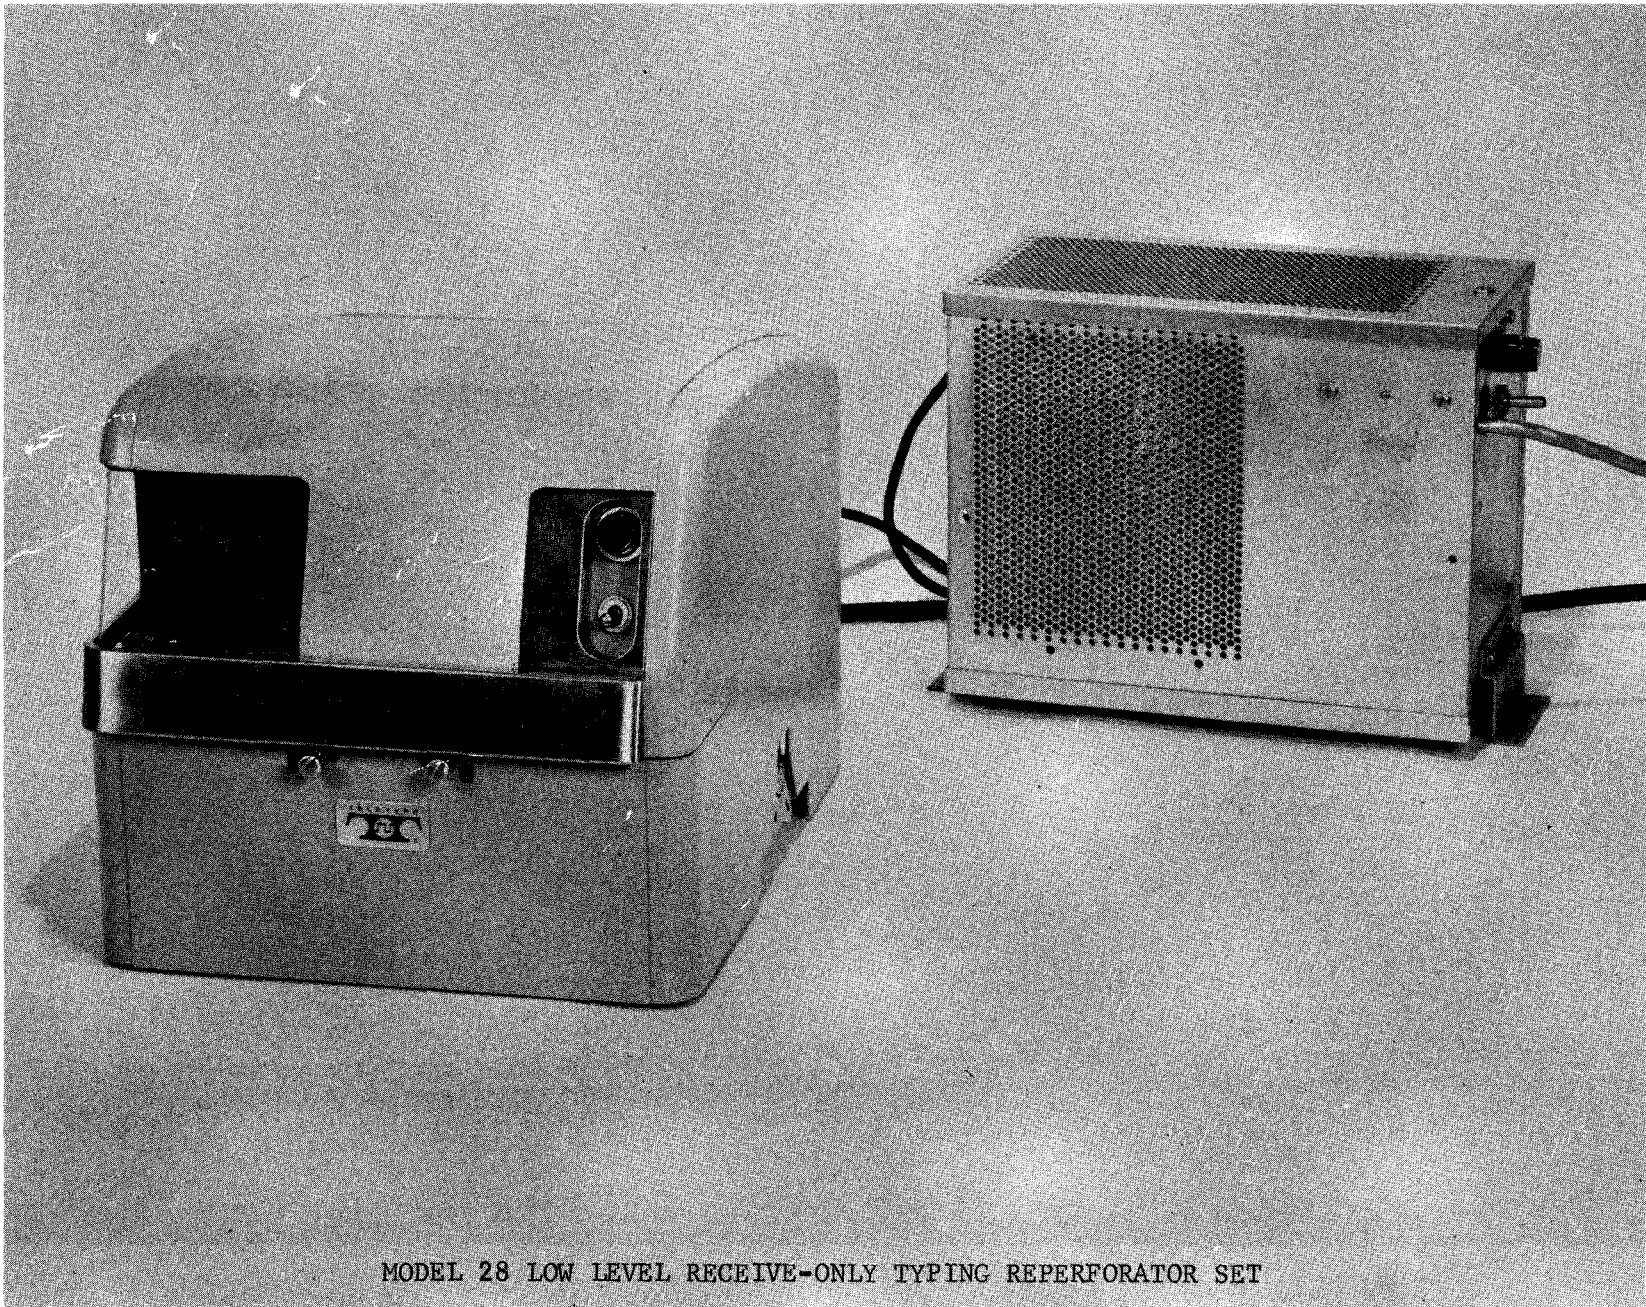

MODEL 28 LOW LEVEL RECEIVE-ONLY TYPING REPERFORATOR SET

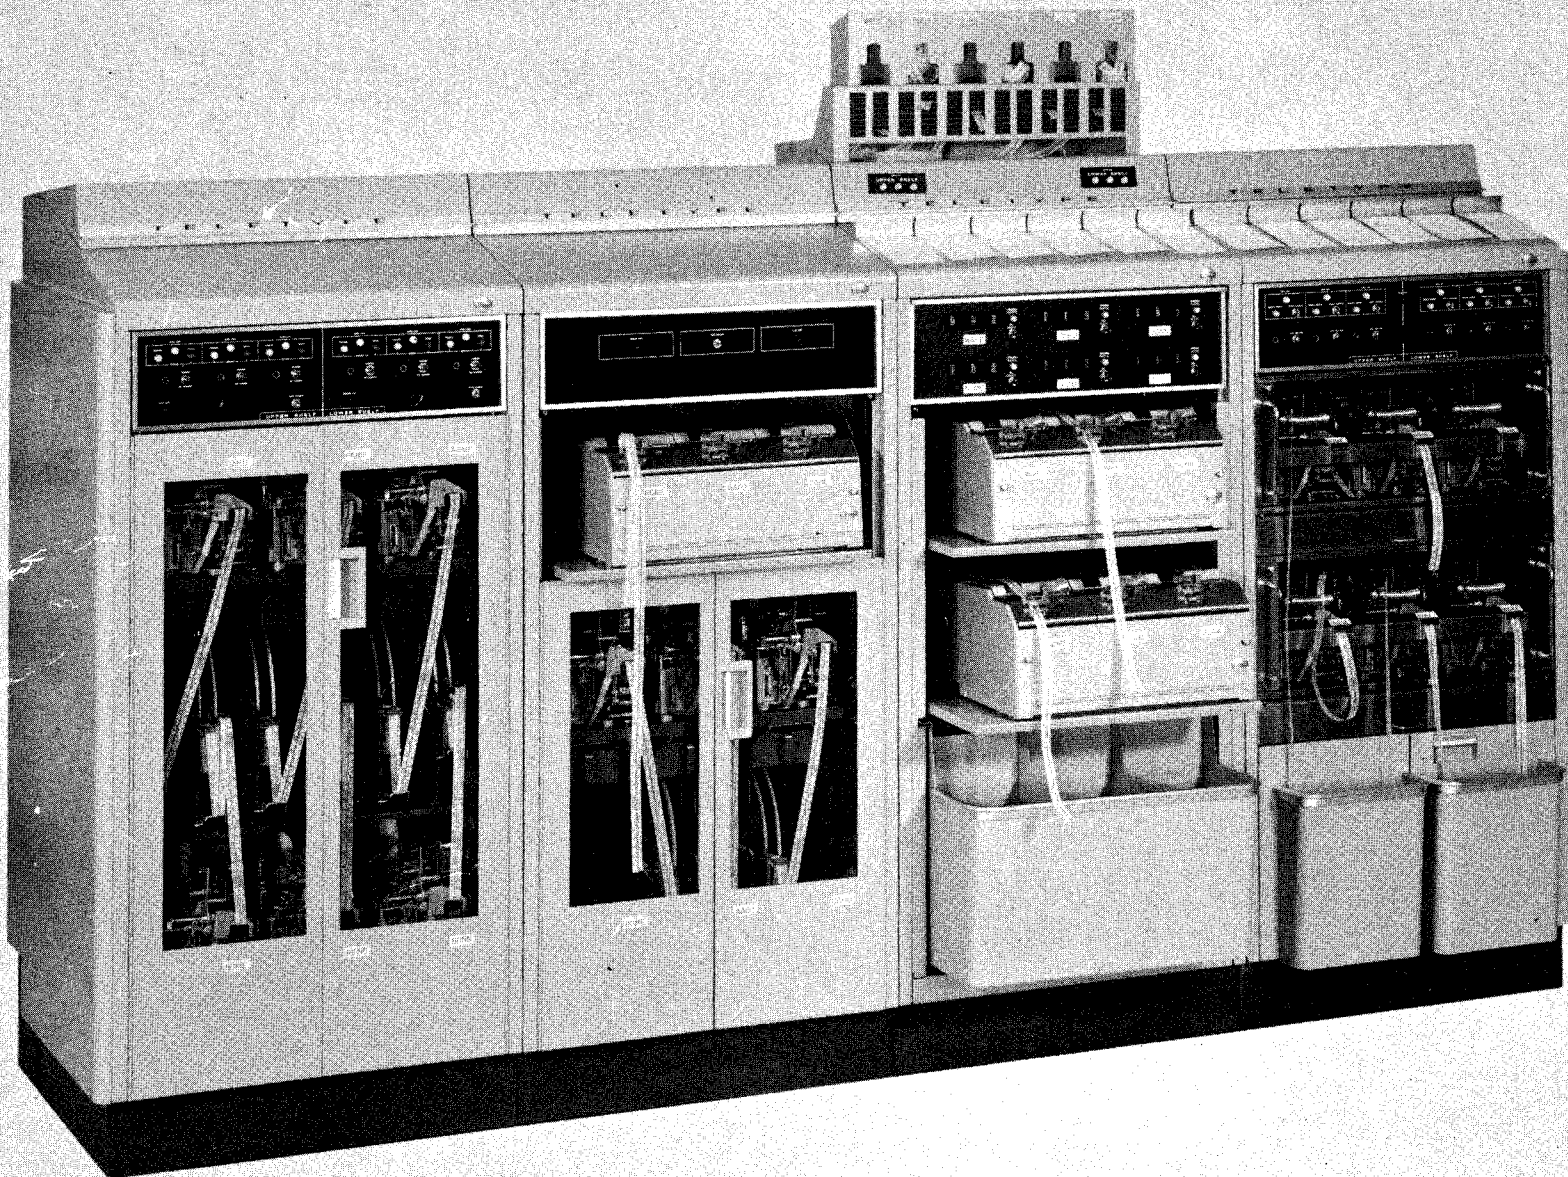

THIS IS ONLY AN EXAMPLE OF BANKING
OF VARIOUS GROUPS OF TORN TAPE
EQUIPMENT.

610429-94

SECTION 6A

April 1, 1968

AN/FGR-5A

TELETYPE MODEL 28 RECEIVER GROUP
TORN TAPE

	LBAC243BR	CABINET	CY-3698/UG
(6)	LPR35BRP	TYPING REPERFORATOR	TT-315/UG
(2)	LMRB203BZ	BASE	MT-2423/UG
(2)	LMU12	MOTOR UNIT	PD-67/U
(2)	173584	SET OF GEARS - 45.5 BAUD	
(2)	164335	SET OF GEARS - 50.0 BAUD	

OPTIONAL

161999BR SET OF END PANELS

7.00 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR
BASE INCLUDES GEARS FOR 75 BAUD
EQUIPPED WITH SELECTOR MAGNET DRIVERS

April 1, 1968

AN/FGR-6A

TELETYPE MODEL 28 TORN TAPE
MONITOR GROUP

	LBAC242BR	CABINET	CY-3699/UG
(6)	LPR37BRP	TYPING REPERFORATOR	TT-317/UG
(2)	LMRB203BZ	BASE	MT-2423/UG
(2)	LMU12	MOTOR UNIT	PD-67/U
(2)	TW15	TAPE WINDER	RL-216/UG
(2)	173584	SET OF GEARS (45.5 BAUD)	
(2)	164335	SET OF GEARS (50.0 BAUD)	

OPTIONAL

161999BR SET OF END PANELS

7.00 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR
BASE INCLUDES GEARS FOR 75 BAUD
EQUIPPED WITH SELECTOR MAGNET DRIVERS

April 1, 1968

AN/FGR-8

TELETYPE CORPORATION MODEL 28 TORN TAPE
MONITOR SET

	LBAC224BR	CABINET	CY-3060/UG
(2)	LMRB203BZ	BASE	MT-2423/UG
(6)	LPR37BWA	TYPING REPERFORATOR	TT-317/UG
(2)	LMU39	MOTOR	PD-77A/W
(2)	TW15	TAPE WINDER	RL-216/UG
(6)	162213	SET OF GEARS (75 BAUD)	

OPTIONAL

161999BR SET OF END PANELS

7.00 UNIT CODE
CRITICOM TYPE

SAME AS TT-309/UG EXCEPT IT USES LMU39
SERIES GOVERNED MOTOR.

April 1, 1968

AN/FGR-9

TELETYPE MODEL 28 TORN TAPE
RECEIVING GROUP

LBAC225BR	CABINET	CY-3061/UG
(6) LPR35BRP	REPERFORATOR	TT-494/GGR-1
(2) LMRB203BZ	BASE UNIT	MT-2423/UG
(2) LMU39	MOTOR UNIT	PD-77A/U
(2) 195185	PLATE FOR LMU39	
104986	TUNING FORK	

OPTIONAL

161999BR SET OF END PANELS

7.00 UNIT CODE
SERIES GOVERNED MOTOR SIMILAR TO AN/GGC-12

April 1, 1968

AN/FGT-4

TELETYPE MODEL 28 TORN TAPE
TRANSMITTING GROUP

LBAC229BR	CABINET	CY-3249/UG
(6) LBXD18	TRANSMITTER DISTRIBUTOR	TT-354/FG
(2) LMXB200BR	TRANS. DIST. BASE	MT-2600/UG
(2) LMU12	MOTOR UNIT	PD-67/U
(2) 173592	SET OF GEARS (45.5 BAUD)	
(2) 179212	SET OF GEARS (50.0 BAUD)	
(2) 173589	SET OF GEARS (75.0 BAUD)	

OPTIONAL

161999BR SET OF END PANELS

7.00 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR

April 1, 1968

AN/FGT-6

TELETYPE MODEL 28 TORN TAPE
TRANSMITTER GROUP

	LBAC223BR	CABINET	CY-3059/UG
	LMXB206BR	BASE	MT-2421/UG
(3)	LXD11	TRANSMITTER DISTRIBUTOR	TT-311/UG
	LMXB205BR	BASE	MT-2420/UG
(3)	LBXD16	TRANSMITTER DISTRIBUTOR	TT-312/UG
(2)	LMU41	MOTOR UNIT	PD-18A/U
	173595	SET OF GEARS (75 BAUD)	
(2)	173589	SET OF GEARS (75 BAUD)	

OPTIONAL

161999BR SET OF END PANELS

7.00 UNIT CODE

SAME AS TT-310/UG EXCEPT USES (2) SERIES
GOVERNED (LMU41) MOTORS INSTEAD OF (3)
SYNCHRONOUS LMU3 MOTORS.

April 1, 1968

AN/GGC-12

TELETYPE MODEL 28 TORN TAPE
RECEIVING GROUP

	LBAC225BR	CABINET	CY-3061/UG
(4)	LPR35BRP	TYPING REPERFORATOR	TT-315/UG
(2)	LMRB203BZ	BASE UNIT	MT-2423/UG
(2)	LMU12	MOTOR UNIT	PD-67/U

OPTIONAL

161999BR SET OF END PANELS

7.00 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR
BASE INCLUDES GEARS FOR 75 BAUD

April 1, 1968

AN/GGR-1

TELETYPE MODEL 28 TORN TAPE
RECEIVING GROUP

LBAC254BR	CABINET	CY-4704/GGR
LMBR207BZ	BASE	MT-3492/GGR
(6) LPR35BRP	TYPING REPERFORATOR	TT-494/GGR-1
(2) LMU12	MOTOR UNIT	

OPTIONAL

161999BR SET OF END PANELS

7.00 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR
BASE INCLUDES GEARS FOR 75 BAUD

SHIELDED LEADS ON LMRB & LPR
PRINTING OVER FEED HOLES

April 1, 1968

AN/GGR-1A

TELETYPE MODEL 28 TORN TAPE
RECEIVING GROUP

LBAC254BR	CABINET	CY-4704/GGR
(2) LMRB207BZ	BASE	MT-3492/GGR
(6) LPR35BRP	TYPING REPERFORATOR	TT-494/GGR-1
(2) LMU12	MOTOR UNIT	
(6) 161510	SPROCKET	
(6) 161222	BELT	
(6) 173583	SPROCKET	
(6) 161509	HUB	
(6) 161511	RETAINER	

OPTIONAL

161999BR SET OF END PANELS

7.00 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR
BASE INCLUDES GEARS FOR 75 BAUD

SHIELDED LEADS ON LMRB & LPR
PRINTING OVER FEED HOLES
45 BAUD GEARS SEPARATE

April 1, 1968

AN/GGR-1X

TELETYPE MODEL 28 TORN TAPE
RECEIVING GROUP

LBAC254BR	CABINET	CY-4704/GG
(2) LMRB207BZ	BASE	MT-3942/GG
(6) LPR35BRP	TYPING REPERFORATOR	TT-494/GG
(2) LMU39	MOTOR UNIT	PD-77/AU
(6) 161510	SPROCKET	
104986	TUNING FORK	
(2) 195185	PLATE FOR LMU39	
(6) 162222	BELT	
(6) 173583	SPROCKET	
(6) 161509	HUB	
(6) 161511	RETAINER	

OPTIONAL

161999BR SET OF END PANELS

7.00 UNIT CODE
SERIES GOVERNED MOTOR

SHIELDED LEADS ON LMRB & LPR
PRINTING OVER FEED HOLES
45 BAUD GEARS SEPARATE

April 1, 1968

AN/GGR-2

TELETYPE MODEL 28 TORN TAPE
MONITOR GROUP

LBAC257BR	CABINET	CY-4705/GGR-2
(2) LMRB203BZ	BASE	
(6) LPR37BRP	TYPING REPERFORATOR	TT-495/GGR-2
(2) LMU12	MOTOR UNIT	
(2) TW15	TAPE WINDER	

OPTIONAL

161999BR SET OF END PANELS

7.00 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR

SHIELDED LEADS ON LPR & LMRB
PRINTING OVER FEED HOLES
BASE INCLUDES GEARS FOR 75 BAUD

April 1, 1968

AN/GGR-2A

TELETYPE MODEL 28 TORN TAPE
MONITOR GROUP

LBAC257BR	CABINET	CY-4705/GGR-2
(2) LMRB203BZ	BASE	
(6) LPR37BRP	TYPING REPERFORATOR	TT-495/GGR-2
(2) LMU12	MOTOR UNIT	
(2) TW15	TAPE WINDER	
(6) 161510	SPROCKET	
(6) 161222	BELT	
(6) 173583	SPROCKET	
(6) 161509	HUB	
(6) 161511	RETAINER	

OPTIONAL
161999BR

SET OF END PANELS

7.00 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR

SHIELDED LEADS ON LPR & LMRB
PRINTING OVER FEED HOLES
GEARS FOR 45.0 BAUD SEPARATE

April 1, 1968

AN/GGR-2X

TELETYPE CORPORATION MODEL 28
TORN TAPE MONITOR GROUP

	LBAC257BR	CABINET	CY-3060/UG
(2)	LMRB203BZ	BASE	MT-2423/UG
(6)	LPR37BRP	TYPING REPERFORATOR	TT-495/GG
(2)	LMU39	MOTOR UNIT	PD-77/AU
(2)	TW15	TAPE WINDER	RL-216/UG
(6)	161510	SPROCKET	
(2)	195185	SET OF PARTS (LMU PLATE)	
	104986	TUNING FORK	
(6)	162222	BELT	
(6)	173583	SPROCKET	
(6)	161509	HUB	
(6)	161511	RETAINER	

OPTIONAL
161999BR SET OF END PANELS

7.00 UNIT CODE
SHIELDED LEADS ON LPR AND LMRB
PRINTING OVER FEED HOLES

BASE INCLUDES GEARS FOR 75 BAUD
SERIES GOVERNED MOTOR

April 1, 1968

AN/GGT-3

TELETYPE CORPORATION MODEL 28
TORN TAPE TRANSMITTER GROUP

	LBAC256BR	CABINET	CY-4706/GGT
	LMXB209BR	BASE	MT-3493/GGT
(3)	LXD31	TRANSMITTER DISTRIBUTOR	TT-496/GGT
	LMXB207BR	BASE	
(3)	LBXD16	TRANSMITTER DISTRIBUTOR	
(2)	LMU3	MOTOR UNIT	
	173595	GEAR FOR 75.0 BAUD (LXD)	
	173589	GEAR FOR 75.0 BAUD (LBXD)	
(3)	172679	MODIFICATION KIT	
	<u>OPTIONAL</u> 161999BR	SET OF END PANELS	

SHIELDED LEADS ON LXD AND LBXD

LXD HAS SINGLE CONTACT WITH RF FILTERING
AND WIRED FOR POLAR TRANSMISSION

7.00 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR

April 1, 1968

AN/GGT-3X

TELETYPE CORPORATION MODEL 28
TORN TAPE TRANSMITTER GROUP

	LBAC256BR	CABINET	CY-4706/UG
	LMXB209BR	BASE	MT-3943/UG
(3)	LXD31	TRANSMITTER DISTRIBUTOR	TT-496/UG
	LMXB207BR	BASE	MT-3299/UG
(3)	LBXD16	TRANSMITTER DISTRIBUTOR	TT-312/UG
(2)	LMU41	MOTOR	PD-18A/U
	173595	GEAR SET (75 BAUD)	
	173589	GEAR SET (75 BAUD)	
(3)	172679	SET OF PARTS (TAPE DEFLECTION)	
	173598	DRIVE PARTS	
	173592	DRIVE PARTS	
	104986	TUNING FORK	

SHIELDED ON LXD AND LBXD

LXD HAS SINGLE CONTACT WITH RF FILTERING
AND WIRED FOR POLAR TRANSMISSION.

7.00 UNIT CODE
SERIES GOVERNED MOTOR

April 1, 1968

AN/GGT-4

TELETYPE MODEL 28 TORN TAPE TRANSMITTER GROUP

	LBAC256BR	Cabinet	CY-4706/GGT
	LMXB209BR	Base	MT-3493/GGT
(3)	LXD31	Transmitter Distributor	TT-496/GGT
	LMXB207BR	Base	
(3)	LBXD16	Transmitter Distributor	
(2)	LMU3	Motor Unit	
	173595	Gears for 75.0 Baud (LXD)	
	173589	Gears for 75.0 Baud (LBXD)	
(3)	172679	Modification Kit	
	173598	Drive Parts	
	173592	Drive Parts	

7.00 Unit Code

LXD31 has single contact with RF filtering
and shielded leads.

60 Cycle Synchronous Motor

September 15, 1969

AN/UGC-65

TELETYPE CORPORATION MODEL 28 UNIVERSAL TORN
TAPE TRANSMITTING GROUP CONSISTING OF:

(1)	LBAC229BR	CABINET	CY-3249/UG
(2)	LMXB200BR	BASE	MT-2600/UG
(2)	LMU12	MOTOR	PD-67/U
(6)	LBXD9	TRANSMITTER DIST.	TT-334/UG
(2)	162035	GEAR SET - 60 WPM	
(2)	162041	GEAR SET - 100 WPM	
(2)	162038	GEAR SET - 75 WPM	
*(1)	161999BR	END PANELS	

*OPTIONAL

7.42 UNIT CODE
SYNCHRONOUS MOTOR (60 CYCLE)

BASE DOES NOT HAVE LINE SHORTING SWITCHES AND CONNECTS TO
EXTERNAL WIRING THROUGH CONNECTORS.

CABINET DOES NOT HAVE SLIDING SHELVES FOR MULTIPLE MOUNTED
TRANSMITTER DISTRIBUTORS, WIRING TO PERMIT REMOVAL OF EITHER
T-D BASE WITHOUT AFFECTING MESSAGE NUMBERING OR OTHER T.D.
OPEN LINE INDICATORS, INCREASE BIN CAPACITY.

September 15, 1969

AN/UGC-68

TELETYPE CORPORATION MODEL 28
TORN TAPE RECEIVING GROUP

(1)	LBAC243BR	CABINET	CY-3698/UG
(2)	LMRB204BZ	BASE	MT-2594/UG
(6)	LPR35BRP	REPERFORATOR	TT-315/UG
(2)	LMU12	MOTOR	PD-67/U
(2)	161536	GEAR SET - 7.42 BAUD	
*(1)	161999BR	END PANELS	

*OPTIONAL

7.42 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE

CABINET HAS SELECTOR MAGNET DRIVER AND OPEN LINE DETECTOR
INSTEAD OF LINE RELAY.

April 1, 1968

TT-308/UG

TELETYPE MODEL 28 TORN TAPE RECEIVING GROUP

LBAC225BR	Cabinet	CY-3061/UG
(2) LMRB203BZ	Base	MT-2423/UG
(6) LPR35BRP	Typing Reperforator	TT-315/UG
(2) LMU12	Motor Unit	PD-67/U
173584	Set of Gears (45.5 Baud)	

7.00 Unit code

Synchronous motor - 60 cycle

LMRB203BZ Base contains drive parts for 75 Baud operation

CRITICOMM type

April 1, 1968

TT-308A/UG

TELETYPE MODEL 28 TORN TAPE RECEIVER GROUP

LBAC260BR	Cabinet	CY-4789/UG
(2) LMRB203BZ	Base	MT-2423/UG
(6) LPR35BRP	Typing Reperforator	TT-315/UG
(2) LMU12	Motor Unit	PD-67/U

7.00 Unit Code

60 cycle synchronous motor

Base includes gears for 75 Baud operation

Cabinet contains 2 Tube Driver

CRITICOM type

April 1, 1968

TT-308X/UG

TELETYPE CORPORATION MODEL 28
TORN TAPE RECEIVER GROUP

	LBAC225BR	CABINET	CY-3061/UG
(2)	LMRB203BZ	BASE	MT-2423/UG
(6)	LPR35BWA	TYPING REPERFORATOR	TT-315/UG
(2)	LMU39	MOTOR UNIT	PD-77A/U
(6)	162213	SET OF GEARS (75 BAUD)	

OPTIONAL

161999BR SET OF END PANELS

7.00 UNIT CODE

SAME AS TT-308/UG EXCEPT IT USES LMU39
SERIES GOVERNED MOTOR INSTEAD OF LMU12
SYNCHRONOUS MOTOR.

April 1, 1968

TT-309/UG

TELETYPE MODEL 28 TORN TAPE MONITORING GROUP

LBAC224BR	Cabinet	CY-3060/UG
(2) LMRB203BZ	Base	MT-2423/UG
(6) LPR37BRP	Typing Reperforator	TT-317/UG
(2) LMU12	Motor Unit	PD-67/U
(2) TW15	Tape Winder	RL-216/UG
173584	Set of Gears (45.5 Baud)	

7.00 Unit code

Synchronous motor - 60 cycle

Drive parts for 75 Baud operation contained in the LMRB203BZ Base
CRITICOMM Type

April 1, 1968

TT-309A/UG

TELETYPE MODEL 28 TORN TAPE MONITORING GROUP

LBAC259RR	Cabinet	CY-4790/UG
(2) LMRB203BZ	Base	MT-2423/UG
(6) LPR37BRP	Typing Reperforator	TT-317/UG
(2) LMU12	Motor Unit	PD-67/U
(2) TW15	Tape Winder	RL-216/UG

7.00 Unit Code

60 cycle synchronous motor

Base includes gears for 75 Baud operation

Cabinet contains 2 tube drivers

CRITICOM type

April 1, 1968

TT-310/UG

TELETYPE MODEL 28 TORN TAPE TRANSMITTER GROUP

LBAC223BR	Cabinet	CY-3059/UG
LMXB206BR	Base	MT-2421/UG
(3) LXD11	Transmitter Distributor	TT-311/UG
LMXB205BR	Base	MT-2420/UG
(3) LBXD16	Transmitter Distributor	TT-312/UG
(2) LMU3	Motor Unit	PD-17A/UG
173595	Set of Gears (75 Baud)	
173589	Set of Gears (75 Baud)	
(3) 172679	Modification Kit to add Tape Deflectors	
173592	Set of Gears (45.5 Baud)	
173598	Set of Gears (45.5 Baud)	

7.00 Unit Code
Synchronous motor - 60 cycle
CRITICOMM Type

April 1, 1968

TT-310A/UG

TELETYPE MODEL 28 TORN TAPE TRANSMITTER GROUP

LBAC7519SBR	Cabinet	CY-4788/UG
LMXB206BR	Base	MT-2421/UG
(3) LXD29	Transmitter Distributor	TT-502/UG
LMXB205BR	Base	MT-2420/UG
(3) LBXD27	Transmitter Distributor	TT-501/UG
(2) LMU3	Motor Unit	PD-17A/UG
173595	Set of Gears (75 Baud)	
173589	Set of Gears (75 Baud)	
(3) 172679	Modification Kit to add Tape Deflector	

Set same as TT-310/UG except includes gold plated contacts in transmitter distributors, stepping switches, etc.

September 15, 1969

TT-331A/UG

TELETYPE MODEL 28 UNIVERSAL TORN TAPE RECEIVING GROUP

	LBAC243BR	CABINET	CY-3698/UG
(6)	LPR35BRP	TYPING REPERFORATOR	TT-315/UG
(2)	LMRB204BZ	BASE	MT-2594/UG
(2)	LMU12	MOTOR UNIT	PD-67/U
(2)	161530	SET OF GEARS (45.5 BAUD)	
(2)	161533	SET OF GEARS (56.9 BAUD)	
(2)	161536	SET OF GEARS (74.2 BAUD)	
(2)	164338	GEARS FOR 50.0 BAUD	
(2)	164337	GEARS FOR 50.0 BAUD	
	161999BR	*SET OF END PANELS	
		*OPTIONAL	

7.42 UNIT CODE

SYNCHRONOUS MOTOR (60 CYCLE)

SEE TT-332A/UG and TT-333A/UG FOR COMPLETE SYSTEM

September 15, 1969

TT-332A/UG

TELETYPE MODEL 28 UNIVERSAL TORN TAPE MONITORING GROUP

	LBAC242BR	CABINET	CY-3699/UG
(6)	LPR37BRP	TYPING REPERFORATOR	TT-317/UG
(2)	LMRB204BZ	BASE	MT-2594/UG
(2)	LMU12	MOTOR UNIT	PD-67/U
(2)	TW15	TAPE WINDER	RL-216/UG
(2)	161530	SET OF GEARS (45.5 BAUD)	
(2)	164333	GEAR - 50.0 BAUD	
(2)	164337	GEAR - 50.0 BAUD	
(2)	161536	SET OF GEARS (74.2 BAUD)	
(2)	161533	SET OF GEARS (56.9 BAUD)	
	161999BR	*SET OF END PANELS	
		*OPTIONAL	

7.42 UNIT CODE
SYNCHRONOUS MOTOR (60 CYCLE)

SEE TT-331A/UG AND TT-333A/UG FOR COMPLETE SYSTEM

September 15, 1969

TT-333A/UG

TELETYPE MODEL 28 UNIVERSAL TORN TAPE TRANSMITTING GROUP

(1)	LBAC250BR	CABINET	CY-4459/UG
(6)	LBXD9	TRANSMITTER DISTRIBUTOR	TT-334/UG
(2)	LMU12	MOTOR UNIT	PD-67/U
(2)	LMXB207BR	TRANSMITTER DISTRIBUTOR BASE	MT-3299/UG
(2)	162035	SET OF GEARS (45.5 BAUD)	
(2)	162041	SET OF GEARS (74.2 BAUD)	
	176155	SET OF GEARS (50.0 BAUD)	
	162038	SET OF GEARS (56.9 BAUD)	

7.42 UNIT CODE

SYNCHRONOUS MOTOR (60 CYCLE)

SEE TT-331A/UG AND TT-332A/UG FOR COMPLETE SYSTEM.

NOTE: THE QUANTITIES LISTED ABOVE ARE FOR ONE COMPLETE TRANSMITTER GROUP - IF TWO GROUPS ARE REQUIRED, INCREASE EACH ITEM.

April 1, 1968

TT-403A/UC

TELETYPE MODEL 28 UNIVERSAL TORN TAPE RECEIVING GROUP

LBAC243BR	Cabinet	CY-3698/UC
(6) LPR35BRP	Typing Reperforator	TT-315/UC
(2) LMRB204BZ	Base	MT-2594/UC
(2) LMU38	Motor Unit	PD-108/UC
(2) 199861	Set of Gears (45.5 Baud)	
(2) 199864	Set of Gears (74.2 Baud)	

7.42 Unit code
Synchronous motor (50 cycle)

See TT-404A/UC and TT-405A/UC for complete system

April 1, 1968

TT-404A/UG

TELETYPE MODEL 28 UNIVERSAL TORN TAPE MONITORING GROUP

LBAC242BR	Cabinet	CY-3699/UG
(6) LPR37BRP	Typing Reperforator	TT-317/UG
(2) LMRB204BZ	Base	MT-2594/UG
(2) LMU38	Motor Unit	PD-108/UG
(2) TW15	Tape Winder	RL-216/UG
(2) 199861	Set of Gears (45.5 Baud)	
(2) 199864	Set of Gears (74.2 Baud)	

7.42 Unit code
Synchronous motor (50 cycle)

See TT-403A/UG and TT-405A/UG for complete system

April 1, 1968

TT-405A/UG

TELETYPE MODEL 28 UNIVERSAL TORN TAPE TRANSMITTING GROUP

LBAC25OBR	Cabinet	CY-4459/UG
(6) LBXD9	Transmitter Distributor	TT-334/UG
(2) LMU38	Motor Unit	PD-108/UG
(2) LMXB207BR	Base	MT-3299/UG
(2) 199867	Set of Gears (45.5 Baud)	
(2) 199870	Set of Gears (74.2 Baud)	

7.42 Unit Code

Synchronous Motor (50 cycle)

See TT-403A/UG and TT-404A/UG for complete system.

Note: The quantities listed above are for one complete transmitter group - if two groups are required, increase each item.

April 1, 1968

TT-461/UG

TELETYPE MODEL 28

TORN TAPE MONITOR TRANSMITTER GROUP

(PULL BACK)

LBAC232BR	Cabinet	CY-4458/UG
(3) LPR37BRP	Typing Reperforator	TT-317/UG
(2) LMU38	Motor Unit	PD-108/UG
LMRB204BZ	Base	MT-2594/UG
(3) RY33	Line Relay	
199861	Set of Gears (45.5 Baud)	
199867	Set of Gears (45.5 Baud)	
199864	Set of Gears (74.2 Baud)	
199870	Set of Gears (74.2 Baud)	
(3) LBXD9	Transmitter Distributor	TT-334/UG
LMXB200BR	Transmitter Distributor Base	MT-2600/UG
TW15	Tape Winder	RL-216/UG

Synchronous motor (50 cycle)

April 1, 1968

TT-461A/UG

TELETYPE MODEL 28

TORN TAPE MONITOR TRANSMITTER GROUP

LBAC240BR	Cabinet	CY-4852/UG
(3) LPR37BRP	Typing Reperforator	TT-317/UG
(2) LMU38	Motor Unit	PD-108/UG
LMRB204BZ	Base	MT-2594/UG
(3) RY33	Line Relav	
199861	Set of Gears (45.5 Baud)	
199867	Set of Gears (45.5 Baud)	
199864	Set of Gears (74.2 Baud)	
199870	Set of Gears (74.2 Baud)	
(3) LBXD9	Transmitter Distributor	TT-334/UG
LMXB200BR	Transmitter Distributor Base	MT-2600/UG
TW15	Tape Winder	RL-216/UG

Set same as TT-461/UG except includes three numbering modules
in cabinet

April 1, 1968

TT-462/UG

TELETYPE MODEL 28

TORN TAPE MONITOR TRANSMITTER GROUP

(PULL BACK)

LBAC232BR	Cabinet	CY-4458/UG
(3) LPR37BRP	Typing Reperforator	TT-317/UG
(2) LMU12	Motor Unit	PD-67/U
LMRB204BZ	Base	MT-2594/UG
(3) RY33	Line Relay	
161530	Set of Gears (45.5 Baud)	
162035	Set of Gears (45.5 Baud)	
161536	Set of Gears (74.2 Baud)	
162041	Set of Gears (74.2 Baud)	
(3) LBXD9	Transmitter Distributor	TT-334/UG
LMXB200BR	Transmitter Distributor Base	MT-2600/UG
TW15	Tape Winder	RL-216/UG

Synchronous motor

April 1, 1968

TT-462A/UG

TELETYPE MODEL 28

TORN TAPE MONITOR TRANSMITTER GROUP

LBAC240BR	Cabinet	CY-4852/UG
(3) LPR37BRP	Typing Reperforator	TT-317/UG
LMRB204BZ	Base	MT-2594/UG
(2) LMU12	Motor Unit	PD-67/II
(3) RY33	Line Relay	
161530	Set of Gears (45.5 Baud)	
162035	Set of Gears (45.5 Baud)	
161536	Set of Gears (74.2 Baud)	
162041	Set of Gears (74.2 Baud)	
(3) LBXD9	Transmitter Distributor	TT-334/UG
LMXB200BR	Transmitter Distributor Base	MT-2600/UG
TW15	Tape Winder	RL-216/UG

Set same as TT-462/UG except includes three numbering modules
in cabinet

April 1, 1968

TT-556/UG

TELETYPE MODEL 28 TORN TAPE TRANSMITTER GROUP

	LBAC223BR	CABINET	CY-3059/UG
	LMXB206BR	BASE UNIT	MT-2421/UG
(3)	LXD11	TRANSMITTER DISTRIBUTOR	TT-311/UG
	LMXB205BR	BASE UNIT	MT-2420/UG
(3)	LBXD16	TRANSMITTER DISTRIBUTOR	TT-312/UG
(2)	LMU50	MOTOR	PD-111/UG
(3)	172679	MODIFICATION KIT TO ADD TAPE DEFLECTION	
	315857	SET OF GEARS 75 BAUD	
	323840	SET OF GEARS 75 BAUD	
	323496	SET OF GEARS 45.5 BAUD	
	323839	SET OF GEARS 45.5 BAUD	
	323832	SET OF GEARS 50 BAUD	
	323833	SET OF GEARS 50 BAUD	

7.00 UNIT CODE
50 CYCLE SYNCHRONOUS MOTOR
CRITICOM TYPE (SIMILAR TO TT-310/UG)

April 1, 1968

AN/UGC-56

TELETYPE CORPORATION M-28 ASSEMBLED LOW-LEVEL
TORN TAPE MONITOR GROUP

CODED 28-RFL7000B/005/AAK/BR CONSISTING OF:

(6)	LPR75BRP	TYPING REPERFORATOR
(2)	LMU39	MOTOR UNIT
(2)	TW15	PAPER WINDER
	104986	TUNING FORK
	161999BR	SET OF END PANELS
(6)	161510	SPROCKETS
(2)	195185	MODIFICATION KITS
(6)	162222	BELT
(6)	173583	SPROCKETS
(6)	161509	HUB
(6)	161511	RETAINER
	28-RFC7000B/005/AAK/BR	ASSEMBLED SUB-COMPONENTS CONSISTING OF:

	LBAC267BR	CABINET
(2)	LMRB210BZ	BASE
(6)	323810	SELECTOR MAGNET DRIVER CARD
	321132	POWER SUPPLY CARD
	164336	MODIFICATION KIT

7.00 UNIT CODE
2 SERIES GOVERNED MOTORS - 50/60 CYCLE
(FORMERLY TT-309X/UG)

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL COMPONENTS
TO MEET SIGNAL LINE INTERFACE REQUIREMENTS OF $\pm 6V$ STATED IN
MIL-STD-188B.

September 15, 1969

EXHIBIT

AN/UGR-11

TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW
LEVEL TORN TAPE MONITOR GROUP

CODED 28-RFL7002B/005/AAJ/BR CONSISTING OF:

(6)	LPR75BRP	TYPING REPERFORATOR
(2)	LMU12	MOTOR UNIT
(2)	TW15	TAPE WINDER
	28-RFC7002B/005/AAJ/BR ASSEMBLED SUB-COMPONENTS C/O:	
	LBAC282BR	CABINET
(2)	LMRB210	BASE
(6)	323810	SELECTOR MAGNET DRIVER CARD
	321132	POWER SUPPLY CARD
(2)	164336	SET OF PARTS TO PROVIDE GEARS, SPROCKETS AND BELTS FOR LMRB

ASSEMBLY

OPTIONAL

(2)	326265	MOD. KIT FOR 45.5 BAUD - AAN
(2)	164335	MOD. KIT FOR 50 BAUD - AAL
	161999BR	END PANELS (1 SET)

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE
W/SEIZURE FEATURE
FOR USE WITH TRANSMITTER GROUPS W/SEIZURE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 75 BAUD SHOWN, THE RFL AND RFC CODES
WILL CHANGE.

September 15, 1969

EXHIBIT

AN/UGR-12

TELETYPE CORPORATION MODEL 28 LOW
LEVEL TORN TAPE RECEIVER GROUP

CODED 28-RFL7001B/005/AAK/BR CONSISTING OF:

(6)	LPR73BRP	TYPING REPERFORATOR
(2)	LMU39	MOTOR UNIT
	28-RFC7001B/005/AAK/BR ASSEMBLED SUB-COMPONENTS C/O:	
	LBAC268BR	CABINET
(2)	LMRB21OBZ	BASE, MULTIPLE REPERFORATOR
(6)	323810	SELECTOR MAGNET DRIVER CARD
	321132	POWER SUPPLY CARD
(2)	164336	MOD. KIT, TO PROVIDE GEARS SPROCKET & TIMING BELTS (75 BAUD)
(2)	195185	PLATE

OPTIONAL

(2)	326265	MOD. KIT FOR 45.5 BAUD - AAP
(2)	164335	MOD. KIT FOR 50 BAUD - AAM
	161999BR	END PANELS (1 SET)

7.00 UNIT CODE
SERIES GOVERNED MOTOR - 50/60 CYCLE
CRITICOM TYPE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF \pm 6V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 75 BAUD SHOWN, THE RFL AND RFC CODES
WILL CHANGE.

September 15, 1969

AN/UGR-13

TELETYPE CORPORATION MODEL 28 LOW LEVEL
TORN TAPE MONITORING GROUP

CODED 28-RFL7000B/005/AAK/BR CONSISTING OF:

(6)	LPR75BRP	TYPING REPERFORATOR
(2)	LMU39	MOTOR UNIT
(2)	TW15	TAPE WINDER
	28-RFC7000B/005/AAK/BR	ASSEMBLED SUB-COMPONENTS C/O:
	LBAC267BR	CABINET
(2)	LMRB210BR	BASE, MULTIPLE REPERFORATOR
(6)	323810	SELECTOR MAGNET DRIVER CARD
(6)	321132	POWER SUPPLY CARD
(2)	164336	MODIFICATION KIT TO PROVIDE GEARS SPROCKET AND TIMING BELTS 75 BAUD
(2)	195185	PLATE

OPTIONAL

161999BR END PANELS

7.00 UNIT CODE
SERIES GOVERNED MOTOR - 50/60 CYCLE
CRITICOM TYPE
W/O SEIZURE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 75 BAUD SHOWN THE RFL AND RFC CODES
WILL CHANGE.

September 15, 1969

EXHIBIT

AN/UGT-4

TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW-LEVEL
TORN TAPE TRANSMITTER GROUP

CODED 28-RFL7203B/XXX/AAK/BR CONSISTING OF:

LBAC272BR	CABINET
(3) 328000	NUMBERING MODULE
(3) 328003	CRYSTAL
(2) 28-RFC7200B/XXX/AAK/BR	ASSEMBLED SUB-COMPONENTS C/O:

LMXB213BR	BASE
(3) LXD37	TRANSMITTER DISTRIBUTOR
LMU12	MOTOR UNIT
173595	GEAR SET

ASSEMBLY

OPTIONAL

161999BR	SET OF END PANELS (SHOULD BE ORDERED AS REQUIRED)
----------	--

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE
3 CHANNEL (TANDEM) W/O SEIZURE
CRITICOM TYPE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

September 15, 1969

EXHIBIT

AN/UGT-4X

TELETYPE CORPORATION MODEL 28 ASSEMBLED
LOW-LEVEL TORN TAPE TRANSMITTER GROUP

CODED 28-RFL7203B/XXX/AAL/BR CONSISTING OF:

LBAC272BR	CABINET
(3) 328000	NUMBERING MODULE
(3) 328003	CRYSTAL
(2) 28-RFC7200B/XXX/AAL/BR ASSEMBLED SUB-COMPONENTS C/O:	

LMXB213BR	BASE
(3) LXD37	TRANSMITTER DISTRIBUTOR
LMU39	MOTOR UNIT
173595	GEAR SET

ASSEMBLY

OPTIONAL

161999BR	SET OF END PANELS (SHOULD BE ORDERED AS REQUIRED)
----------	---

7.00 UNIT CODE
SERIES GOVERNED MOTOR - 50/60 CYCLE
3 CHANNEL (TANDEM) W/O SEIZURE
CRITICOM TYPE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS OF ± 6 V STATED IN MIL-STD-188B.

September 15, 1969

EXHIBIT

AN/UGT-5

TELETYPE CORPORATION M-28 ASSEMBLED LOW-LEVEL
TORN TAPE TRANSMITTER GROUP

CODED 28-RFL7201A/XXX/AAA/BR CONSISTING OF:

LBAC274BR	CABINET
(3) 328000	NUMBERING MODULE
(3) 328004	CRYSTAL
(2) 28-RFC7200A/XXX/AAA/BR	ASSEMBLED SUB-COMPONENTS C/O:

LMXB213BR	BASE
(3) LXD38	TRANSMITTER DISTRIBUTOR
LMU12	MOTOR UNIT
156659	GEAR SET
ASSEMBLY	

OPTIONAL

161999BR	SET OF END PANELS (SHOULD BE ORDERED AS REQUIRED)
----------	--

7.42 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE
3 CHANNEL (TANDEM) W/SEIZURE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

May 1, 1970

EXHIBIT

AN/UGT-6

TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW-LEVEL
TORN TAPE TRANSMITTER GROUP

CODED 28-RFL7204A/XXX/BAA/BR CONSISTING OF:

	LBAC273BR	CABINET
(6)	328010	NUMBERING MODULE
(6)	328004	CRYSTAL

(2) 28-RFC7204A/XXX/BAA/BR CONSISTING OF:

	LMXB214BR	BASE
(3)	LXD38	TRANSMITTER DISTRIBUTOR
	LMU12	MOTOR UNIT
	327942	GEAR SETS

ASSEMBLY

7.42 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR
6 CHANNEL WITHOUT SEIZURE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6V STATED IN MIL-STD-188B.

November 1, 1970

EXHIBIT

AN/UGT-6A

TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW-LEVEL
TORN TAPE TRANSMITTER GROUP

CODED 28-RFL7205A/XXX/BAA/BR CONSISTING OF:

	LBAC284BR	CABINET
(6)	328010	NUMBERING MODULE
(6)	328004	CRYSTAL
(2)	28-RFC7205A/XXX/BAA/BR	ASSEMBLED SUB-COMPONENTS C/O:

	IMXB214BR	BASE
(3)	LXD38	TRANSMITTER DISTRIBUTOR
	LMU12	MOTOR UNIT
	327942	GEAR SETS
	ASSEMBLY	

OPTIONAL

	161999BR	SET OF END PANELS
--	----------	-------------------

7.42 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR
6 CHANNEL WITHOUT SEIZURE
INCLUDES IMPROVED STRUCTURAL RIGIDITY OF CABINETS

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6V STATED IN MIL-STD-188B.

February 1, 1970

EXHIBIT

AN/UGT-7

TELETYPE CORPORATION MODEL 28 ASSEMBLED LOW-LEVEL
TORN TAPE TRANSMITTER GROUP

CODED 28-RFL7200B/XXX/AAK/BR CONSISTING OF:

	LBAC273BR	CABINET
(6)	328010	NUMBERING MODULE
(6)	328003	CRYSTAL
(2)	28-RFC7200B/XXX/AAK/BR	ASSEMBLED SUB-COMPONENTS C/O:
	LMXB213BR	BASE
(3)	LXD37	TRANSMITTER DISTRIBUTOR
	LMU12	MOTOR UNIT
	173595	GEAR SET
	ASSEMBLY	
	<u>OPTIONAL</u>	
	161999BR	SET OF END PANELS

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE
6 CHANNEL W/O SEIZURE
CRITICOM TYPE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

April 1, 1968

TT-576/UG

TELETYPE CORPORATION M-28 LOW LEVEL
TORN TAPE RECEIVER GROUP

CODED 28-RFL7001B/005/AAJ/BR CONSISTING OF:

(6) LPR73BRP TYPING REPERFORATOR
(2) LMU12 MOTOR UNIT
28-RFC7001B/005/AAJ/BR ASSEMBLED SUB-COMPONENTS C/O:

LBAC268BR CABINET
(2) LMRB210 MULTIPLE REPERFORATOR BASE
(6) 323810 SELECTOR MAGNET DRIVER CARD
321132 POWER SUPPLY CARD
(2) 164336 MOD. KIT, TO PROVIDE GEARS
 SPROCKET & TIMING BELTS
 (75 BAUD)

OPTIONAL

(2) 326265 MOD. KIT FOR 45.5 BAUD - AAN
(2) 164335 MOD. KIT FOR 50.0 BAUD - AAL
161999BR END PANELS (1 SET)

7.00 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR
CRITICOM TYPE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF ±6V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 75 BAUD SHOWN, THE RFL AND RFC CODES
WILL CHANGE.

EXHIBIT

TT-576A/UG

TELETYPE CORPORATION M-28 LOW-LEVEL TORN TAPE
RECEIVER GROUP

CODED 28-RFL7005B/005/AAJ/BR CONSISTING OF:

(6)	LPR73BRP	TYPING REPERFORATOR
(2)	LMU12	MOTOR UNIT
	28-RFC7005B/005/AAJ/BR	ASSEMBLED SUB-COMPONENTS C/O:
	LBAC283BR	CABINET
(2)	LMRB215	BASE, MULTIPLE REPERFORATOR
(6)	323810	SELECTOR MAGNET DRIVER CARD
	321132	POWER SUPPLY CARD
(2)	164336	MOD. KIT TO PROVIDE GEARS SPROCKET & TIMING BELTS (75 BAUD)

ASSEMBLY

OPTIONAL
161999BR

SET OF END PANELS

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE
CRITICOM TYPE
INCLUDES IMPROVED STRUCTURAL RIGIDITY OF CABINETS
INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD OF THE
75 BAUD SHOWN, THE RFL AND RFC CODES WILL CHANGE.

April 1, 1968

TT-577/UG

TELETYPE CORPORATION M-28 LOW LEVEL
TORN TAPE MONITORING GROUP

CODED 28-RFL7000B/005/AAJ/BR CONSISTING OF:

(6)	LPR75BRP	TYPING REPERFORATOR
(2)	LMU12	MOTOR UNIT
(2)	TW15	TAPE WINDER
	28-RFC7000B/005/AAJ/BR ASSEMBLED SUB-COMPONENTS C/O:	
	LBAC267BR	CABINET
(2)	LMRB210	MULTIPLE REPERFORATOR BASE
(6)	323810	SELECTOR MAGNET DRIVER CARD
	321132	POWER SUPPLY CARD
(2)	164336	MOD. KIT TO PROVIDE GEARS SPROCKET AND TIMING BELTS 75 BAUD

OPTIONAL

(2)	326265	MOD. KIT FOR 45.5 BAUD - AAN
(2)	164335	MOD. KIT FOR 50.0 BAUD - AAL
	161999BR	END PANELS (1 SET)

7.00 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR
CRITICOM TYPE
W/O SEIZURE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 75 BAUD SHOWN, THE RFL AND RFC CODES WILL CHANGE.

April 1, 1968

TT-578/UG

TELETYPE CORPORATION M-28 LOW LEVEL
TORN TAPE RECEIVER GROUP

CODED 28-RFL7001B/005/AAQ/BR CONSISTING OF:

- (6) LPR73BRP TYPING REPERFORATOR
- (2) LMU38 MOTOR UNIT
- 28-RFC7001B/005/AAQ/BR ASSEMBLED SUB-COMPONENTS C/O:
 - LBAC268BR CABINET
 - (2) IMRB210 MULTIPLE REPERFORATOR BASE
 - (6) 323810 SELECTOR MAGNET DRIVER CARD
 - 321132 POWER SUPPLY CARD
 - (2) 315854 MOD. KIT TO PROVIDE GEARS SPROCKET
 AND TIMING BELTS, 75 BAUD

OPTIONAL

- (2) 326267 MOD. KIT FOR 45.5 BAUD - AAS
- (2) 326266 MOD. KIT FOR 50 BAUD - AAR
- 161999BR END PANELS (1 SET)

7.00 UNIT CODE
50 CYCLE SYNCHRONOUS MOTOR
CRITICOM TYPE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 75 BAUD SHOWN, THE RFL AND RFC CODES
WILL CHANGE.

April 1, 1968

TT-579/UG

TELETYPE CORPORATION M-28 LOW LEVEL
TORN TAPE MONITORING GROUP

CODED 28-RFL7000B/005/AAQ/BR CONSISTING OF:

(6)	LPR75BRP	TYPING REPERFORATOR
(2)	LMU38	MOTOR UNIT
(2)	TW15	TAPE WINDER
	28-RFC7000B/005/AAQ/BR ASSEMBLED SUB-COMPONENTS C/O:	
	LBAC267BR	CABINET
(2)	LMRB210	BASE MULTIPLE REPERFORATOR
(6)	323810	SELECTOR MAGNET DRIVER CARD
	321132	POWER SUPPLY CARD
(2)	315854	MOD. KIT TO PROVIDE GEARS, SPROCKET AND TIMING BELTS (75 BAUD)


OPTIONAL

(2)	326267	MOD. KIT FOR 45.5 BAUD - AAS
(2)	326266	MOD. KIT FOR 50.0 BAUD - AAR
	161999BR	END PANELS (1 SET)

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 50 CYCLE
CRITICOM TYPE
W/O SEIZURE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 75 BAUD SHOWN, THE RFL AND RFC CODES
WILL CHANGE.

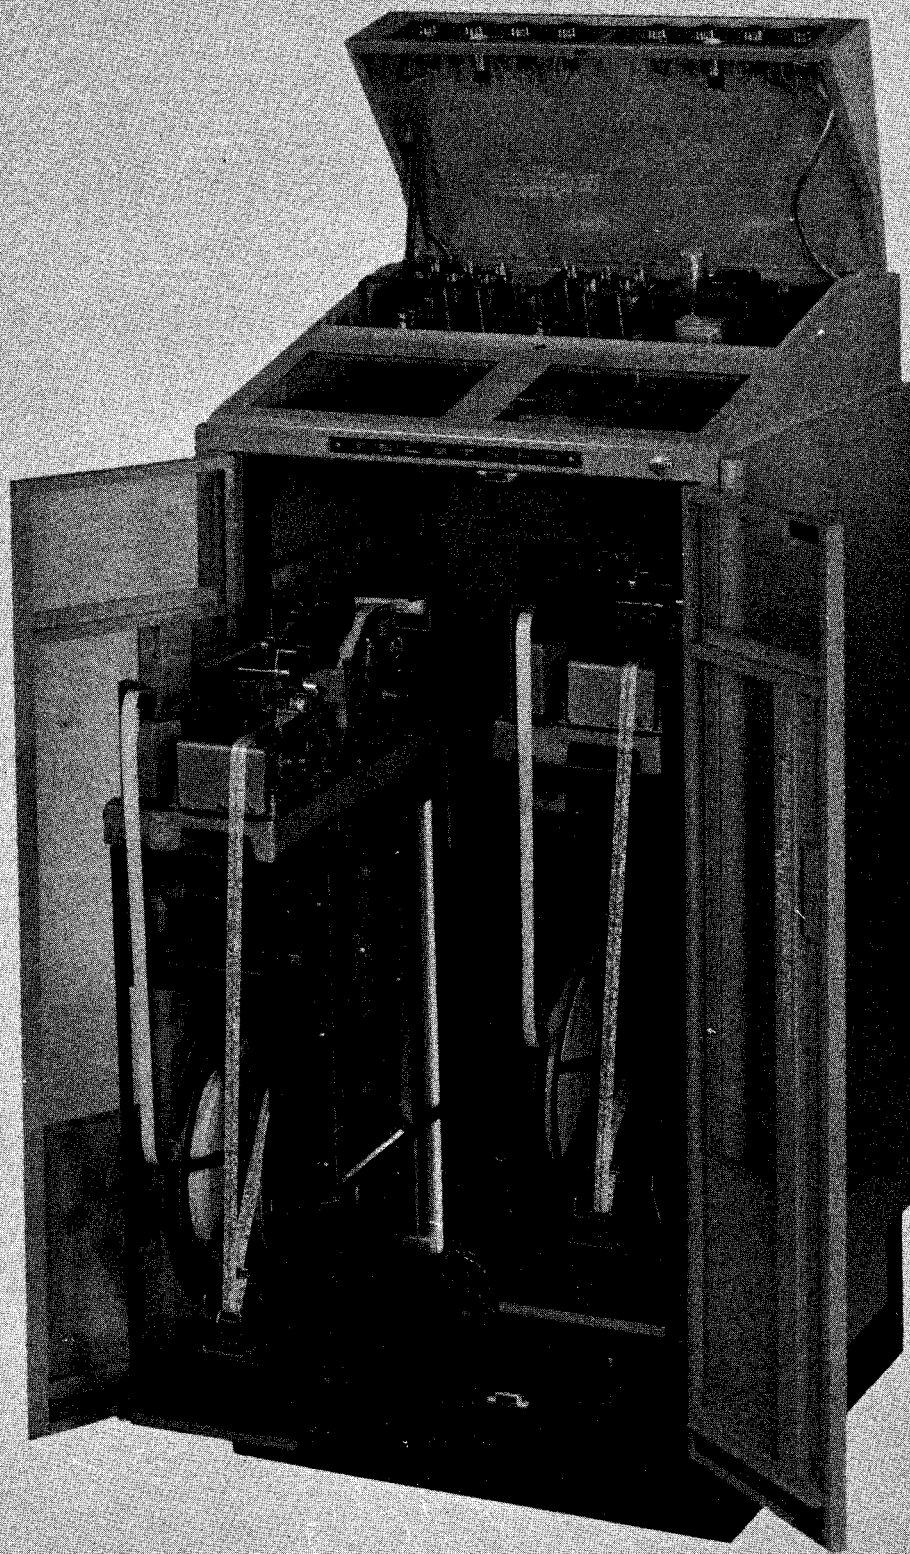

M28 TYPING REPERFORATOR TRANSMITTER
DISTRIBUTOR SET

601201-27

April 1, 1968

AN/UGC-14

TELETYPE MODEL 28 REPERFORATOR
TRANSMITTER SET

LBAC222BR	CABINET	CY-3058/UG
(2) LTHS205BZ	TAPE REEL ASSEMBLY	RL-217/UG
(2) LRXB17	BASE	MT-2424/UG
(2) LAXD7	TRANSMITTER DISTRIBUTOR	TT-313/UG
(2) LPR34BRP	TYPING REPERFORATOR	TT-314/UG
(2) IMU11	MOTOR UNIT	PD-84/U
(2) RY34	LINE RELAY	

7.00 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR
CRITICOM TYPE

April 1, 1968

AN/UGC-17

TELETYPE MODEL 28 REPERFORATOR TRANSMITTER SET

LBAC238BR	Cabinet	CY-3683/UG
(2) LTHS205BZ	Tape Handling Stand	RL-217/UG
(2) LRXB27	Base	MT-2773/UG
(2) LAXD8	Transmitter Distributor	TT-376/UG
(2) LPR34BRP	Typing Reperforator	TT-314/UG
(2) LMU11	Motor Unit	PD-84/U

Set same as the AN/UGC-14 except includes gear shift in LRXB

April 1, 1968

AN/UGC-31

TELETYPE CORPORATION MODEL 28 REPERFORATOR
TRANSMITTER DISTRIBUTOR SET

LBAC253BR	CABINET	CY-4702/UGC-31
(2) LTHS205BZ	TAPE HANDLING STAND	
(2) LRXB17	BASE	
(2) LAXD7	TRANSMITTER DISTRIBUTOR	
(2) LPR34BRP	TYPING REPERFORATOR	TT-493/UGC-31
(2) RY34	LINE RELAY	RE-861/UG
(2) LMU11	MOTOR UNIT	

7.00 UNIT CODE
SHIELDED LEADS
GEARSHIFT ON LRB 45 & 75 BAUD
CHAD DISPOSAL
60 CYCLE SYNCHRONOUS MOTOR

April 1, 1968

AN/UGC-45

TELETYPE MODEL 28 REPERFORATOR TRANSMITTER GROUP

LBAC253BR	Cabinet	CY-4702/UGC-31
(2) LTHS205BZ	Tape Handling Stand	RL-217/UG
(2) LRXB17	Base	MT-2424/UG
(2) LAXD7	Transmitter Distributor	TT-313/UG
(2) LPR34BRP	Typing Reperforator	TT-493/UGC-31
(2) LMU13	Motor Unit	
(2) RY34	Line Relay	RE-861/UG
104986	Tuning Fork	
161999BR	* Set of End Panels	

* Ordered as required.

Same as AN/UGC-31 except uses LMU13 series 50/60 cycle instead of
of LMU4 synchronous 60 cycle only.

7.00 Unit Code

SECTION 7B

Unassigned

April 1, 1968

AN/FGT-5

TELETYPE MODEL 28 TRANSMITTER DISTRIBUTOR SET
(FOR TORN TAPE SYSTEM)

LXD7	TRANSMITTER DISTRIBUTOR
LXDB3	TRANSMITTER DISTRIBUTOR BASE
LXDC200BR	COVER
LMU41	MOTOR UNIT
156658	SET OF GEARS (60 WPM)
161358	SET OF GEARS (67 WPM)
156728	SET OF GEARS (75 WPM)
156659	SET OF GEARS (100 WPM)
104986	SPEED INDICATOR

7.00 UNIT CODE
SERIES GOVERNED MOTOR

April 1, 1968

AN/UGA-7

TELETYPE CORPORATION MODEL 28 SELF-CONTAINED
TRANSMITTER DISTRIBUTOR SET

LXDC200BR	COVER	
LXDB9	BASE	
LXD31	TRANSMITTER DISTRIBUTOR	TT-496/GGT
LMU39	MOTOR UNIT	PD-77A/U
LT200BR	TABLE	
173861	DOLLY	
173595	SET OF GEARS (75 BAUD)	
173598	SET OF GEARS (45 BAUD)	
104986	TUNING FORK	

7.00 UNIT CODE
SERIES GOVERNED MOTOR
TABLE

September 15, 1969

AN/UGC-66

TELETYPE CORPORATION LOW-LEVEL MODEL 28
SELF-CONTAINED TRANSMITTER DISTRIBUTOR SET

LXDC200BR	COVER
LXD11	TRANSMITTER DISTRIBUTOR
LXDB9	BASE
LMU41	MOTOR
104986	TUNING FORK
173595	GEAR SET
173598	GEAR SET
161359	GEAR SET
321215	LOW-LEVEL MOD KIT

7.00 UNIT CODE
50/60 CYCLE SERIES GOVERNED MOTOR

SAME AS TT-533/UG EXCEPT WITH 321215 MOD KIT WHICH
CHANGES THIS FROM HIGH LEVEL TO LOW LEVEL.

September 15, 1969

AN/UGC-71

TELETYPE CORPORATION MODEL 28
MANUAL ROUTING SET

LT200BR	TABLE
LXD44	TRANSMITTER DISTRIBUTOR
LXDB21	BASE, TRANSMITTER DISTRIBUTOR
LMU19	MOTOR
LXDC202BR	COVER
329324BR	SWITCHING CONTROL ASSEMBLY
159373	MOD KIT
329325	PANEL ASSEMBLY, LOGIC
173595	GEAR SET
332540	CABLE ASSEMBLY (POWER)
308478	CABLE ASSEMBLY
82832	WASHER
165103	SCREW
150323	WASHER
312684	WIRE ASSEMBLY, ELECT.

7.00 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR

SIMILAR TO THE AN/UGC-10

April 1, 1968

TT-187/UG

TELETYPE MODEL 28 TRANSMITTER DISTRIBUTOR SET

LXD1	Transmitter Distributor
LXDB1	Transmitter Distributor Base
LMU3	Motor Unit
LXDC200BR	Cover
156658	Set of Gears (60 WPM)
156728	Set of Gears (75 WPM)
156659	Set of Gears (100 WPM)

7.42 Unit Code
60 Cycle Synchronous Motor
Standard Size

April 1, 1968

TT-187A/UG

TELETYPE MODEL 28 MINIATURIZED

TRANSMITTER DISTRIBUTOR SET

LXD4	Transmitter Distributor
LXDB4	Transmitter Distributor Base
LMU19	Motor Unit
LXDC201BR	Cover
156658	Set of Gears (60 WPM)
156728	Set of Gears (75 WPM)
156659	Set of Gears (100 WPM)
<u>Optional Item</u>	
161358	Set of Gears (67 WPM)

7.42 Unit Code
Synchronous Motor
No Synchronous Pulse in Selector Magnets
Miniaturized

April 1, 1968

TT-187B/UC

TELETYPE MODEL 28 MINIATURIZED

TRANSMITTER DISTRIBUTOR SET

LXD11	Transmitter Distributor
LMU19	Motor Unit
LXDB4	Transmitter Distributor Base
LXDC201BR	Cover
173598	Set of Gears (45.5 Baud)
161359	Set of Gears (50.0 Baud)
173595	Set of Gears (75.0 Baud)

7.00 Unit code
Synchronous motor - 60 cycle
w/stepping magnet

April 1, 1968

TT-187C/UC

TELETYPE MODEL 28 MINIATURIZED

TRANSMITTER DISTRIBUTOR SET

LXD30	Transmitter Distributor
LXDB4	Transmitter Distributor Base
LMU19	Motor Unit
LXDC201BR	Cover
156658	Set of Gears (60 WPM)
156659	Set of Gears (100 WPM)

7.42 Unit code
Synchronous motor (60 cycle)
w/stepping magnet
Miniaturized

April 1, 1968

EXHIBIT

187E/UG

TELETYPE CORPORATION M-28 ASSEMBLED
TRANSMITTER DISTRIBUTOR SET

CODED VSL575BR CONSISTING OF:

LXD29	TRANSMITTER DISTRIBUTOR
LMU19	MOTOR UNIT
LXDB19	TRANSMITTER DISTRIBUTOR BASE
LXDC201BR	COVER
173595	GEAR SET (75 BAUD)

7.00 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR
W/STEPPING MAGNET
GOLD PLATED CONTACTS

April 1, 1968

TT-273/UG

TELETYPE MODEL 28 TRANSMITTER DISTRIBUTOR SET

LXD1	Transmitter Distributor
LXDB1	Transmitter Distributor Base
LXDC200BR	Cover
LMU41	Motor Unit
104986	Speed Indicator
156658	Set of Gears (60 WPM)
156728	Set of Gears (75 WPM)
156659	Set of Gears (100 WPM)

Set same as TT-187/UG except equipped with series governed motor and speed indicator

April 1, 1968

TT-273A/UG

TELETYPE CORPORATION MODEL 28
TRANSMITTER DISTRIBUTOR SET

LXD30	TRANSMITTER DISTRIBUTOR
LXDB3	TRANSMITTER DISTRIBUTOR BASE
LXDC200BR	COVER
LMU38	MOTOR UNIT
305534	SET OF GEARS (45.5 BAUD)
305536	SET OF GEARS (74.2 BAUD)

7.42 UNIT CODE
50 CYCLE SYNCHRONOUS MOTOR
W/STEPPING MAGNETS
STANDARD SIZE

DECEMBER 15, 1970

EXHIBIT

TT-570/UG

TELETYPE CORPORATION MODEL 28 LOW LEVEL
ASSEMBLED MINIATURIZED TRANSMITTER DISTRIBUTOR SET

CODED 28-RFT5000B/XXX/AAS/BR CONSISTING OF

LXDC201BR	COVER
28RFC5000B/XXX/AAS/BR	ASSEMBLED SUB-COMPONENTS C/O:
LXD37	TRANSMITTER DISTRIBUTOR
LXDB20	TRANSMITTER DISTRIBUTOR BASE
LMU19	MOTOR UNIT
173595	SET OF GEARS (75.0 BAUD)
326792	ELECTRICAL SERVICE ASSEMBLY
321991	CIRCUIT CARD ASSEMBLY CMD
321290	CIRCUIT CARD ASSEMBLY POWER SUPPLY
303142	CIRCUIT CARD ASSEMBLY KEYER

OPTIONAL

173598	SET OF GEARS 45.5 BAUD - AAV
161359	SET OF GEARS 50.0 BAUD - AAZ

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 75 BAUD SHOWN THE RFX AND RFC CODES
WILL CHANGE.

September 15, 1969

EXHIBIT

TT-603/UG

TELETYPE CORPORATION MODEL 28 LOW-LEVEL
ASSEMBLED MINIATURIZED TRANSMITTER DISTRIBUTOR SET

CODED 28-RFT5000A/XXX/AAB/BR CONSISTING OF:

LXDC201BR	COVER
28-RFC5000A/XXX/AAB/BR	ASSEMBLED SUB-COMPONENTS C/O:
LXD38	TRANSMITTER DISTRIBUTOR
LXDB20	TRANSMITTER DISTRIBUTOR BASE
LMU19	MOTOR UNIT
156659	GEAR SET (74.2 BAUD)
326792	ELECTRICAL SERVICE ASSEMBLY
321991	CIRCUIT CARD ASSEMBLY (CMD)
321290	CIRCUIT CARD ASSEMBLY POWER SUPPLY
303142	CIRCUIT CARD ASSEMBLY KEYS

ASSEMBLY


OPTIONAL

161358	GEAR SET 50.0 BAUD - AAH
156658	GEAR SET 45.5 BAUD - AAL

7.42 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF ± 6 V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD
OF THE 74.2 BAUD SHOWN, THE RFT AND RFC CODES
WILL CHANGE.

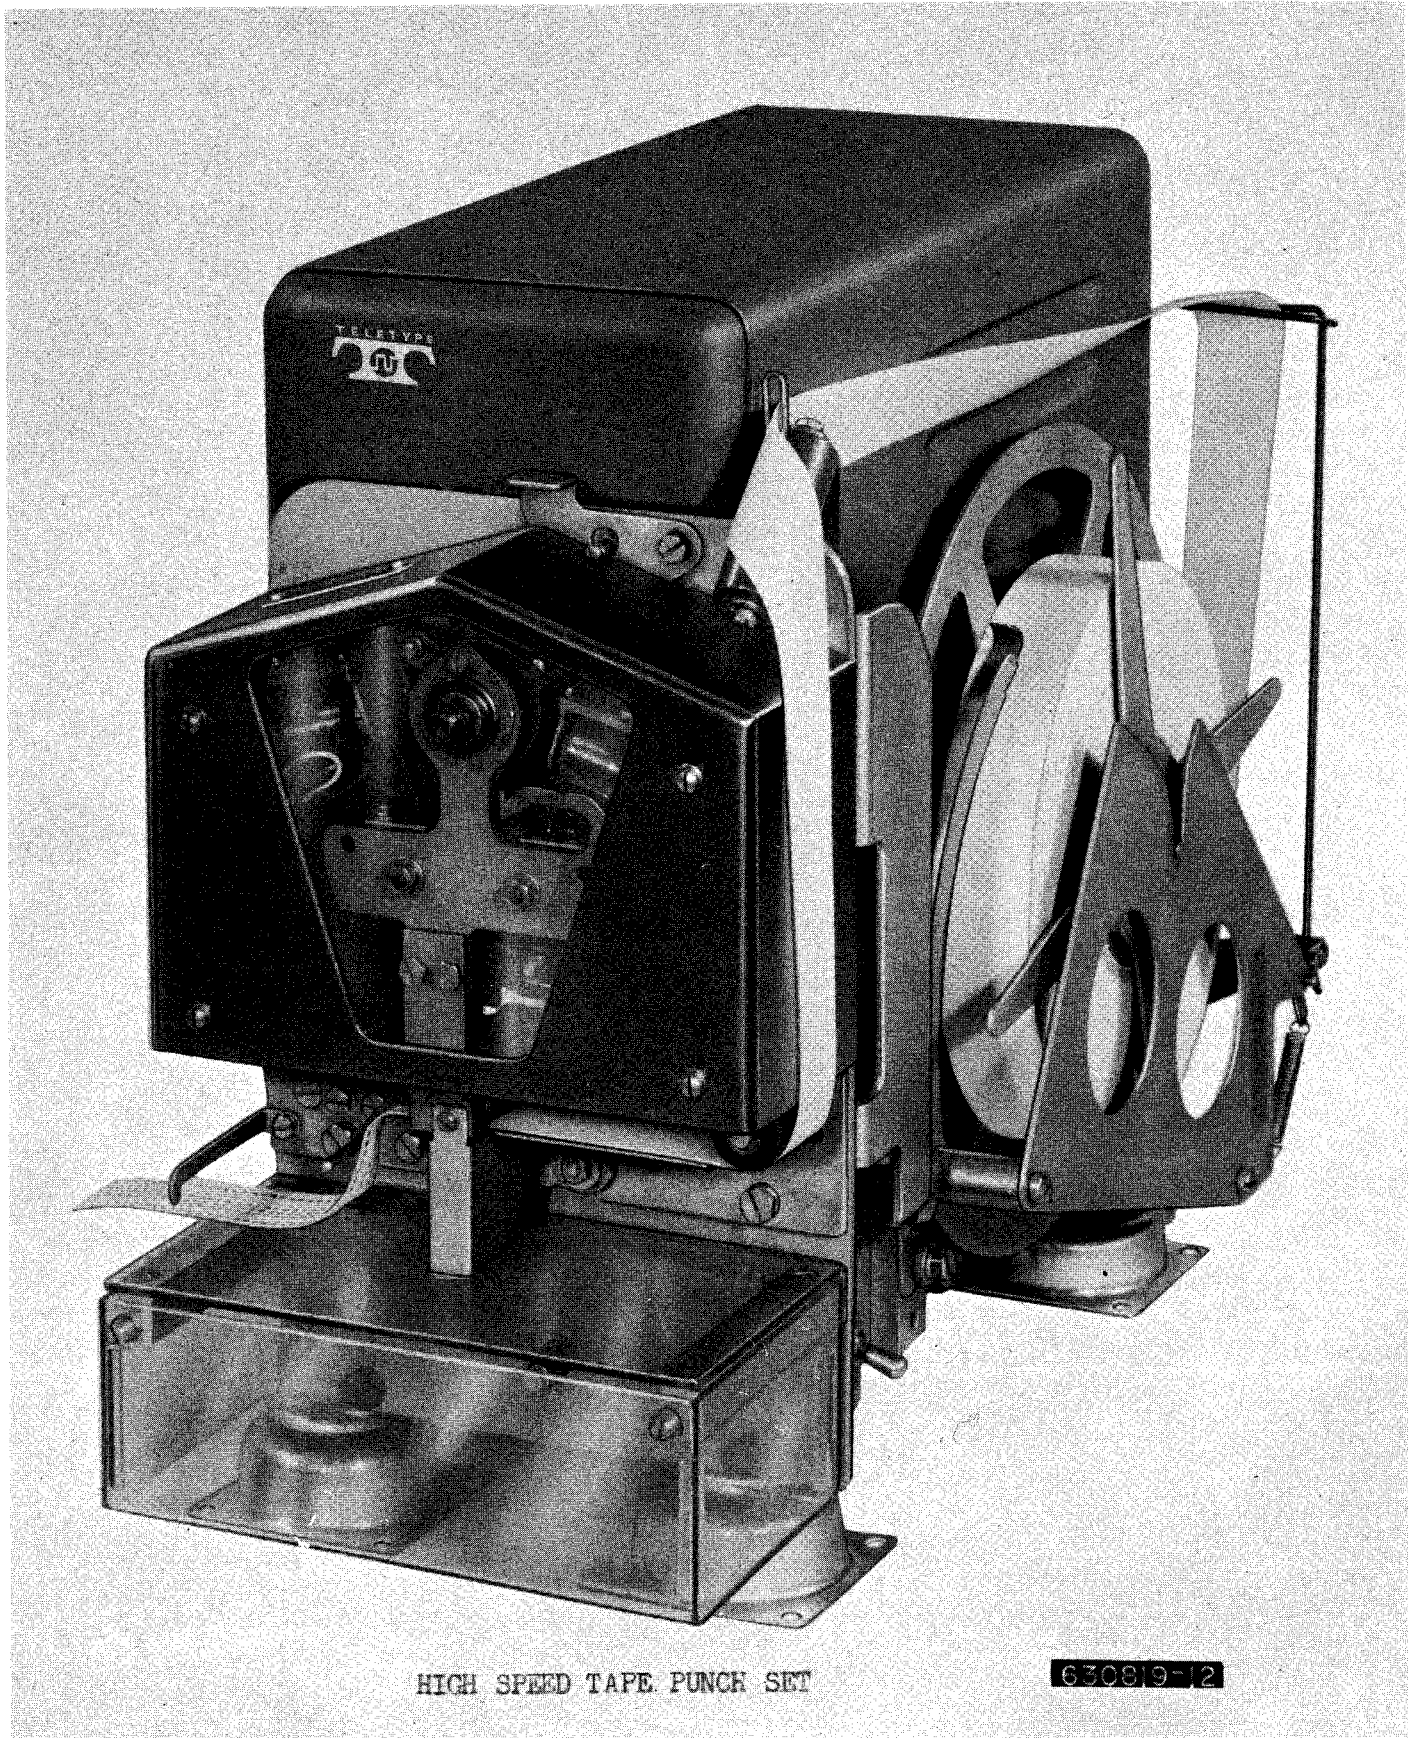

HIGH SPEED TAPE PUNCH SET

63099-2

April 1, 1968

AN/GGA-19

TELETYPE ASSEMBLED HIGH SPEED TAPE PUNCH SET

BRPE21	PUNCH
BRPEB11	BASE
BRPEC200BU	COVER
LMU6	MOTOR UNIT
143044	SET OF DRIVE PARTS
104986	TUNING FORK

5-8 LEVEL

11/16 or 1 INCH FULLY PERFORATED TAPE

60 CYCLE SYNCHRONOUS MOTOR

110 CPS

April 1, 1968

TT-329/UG

TELETYPE ASSEMBLED HIGH SPEED TAPE PUNCH SET

BRPE15	Punch
BRPEB6	Base
BRPEC200BR	Cover
LMU3	Motor Unit
143044	Set of Drive Parts

8-Level

11/16" Fully Perforated Tape

Tape notching on 0 and 6th Level Punch Pins

60 Cycle Synchronous Motor

110 cps

April 1, 1968

TT-350/UG

TELETYPE ASSEMBLED HIGH SPEED TAPE PUNCH SET

BRPE9	Punch
BRPEB8	Base
BRPEC200BU	Cover
LMU3	Motor Unit
143062	Set of Drive Parts

5-Level
11/16" Fully Perforated Tape
60 Cycle Synchronous
63.3 cps

April 1, 1968

TT-509/UG

TELETYPE MODEL 28

ASSEMBLED HIGH SPEED TAPE PUNCH SET

BRPE15	Punch
BRPEB6	Base
BRPEC200BR	Cover
LMU38	Motor Unit
147624	Set of Drive Parts

8-Level
11/16" Fully Perforated Tape
Tape Notching 0 and 6th Level Punch Pins
50 Cycle Synchronous Motor
110 cps

April 1, 1968

EXHIBIT

TT-575/UG

TELETYPE CORPORATION ASSEMBLED HIGH SPEED
TAPE PUNCH SET

BRPE15	Reperforator
BRPEB13	Base Unit
LMU3	Motor Unit
BRPE200BR	Motor Unit
143044	Drive Parts

Same as TT-329/UG except uses 11/16" Tape Supply Reel.

April 1, 1968

AN/GGA-20

TELETYPE MODEL CX HIGH SPEED TAPE READER SET

CX802	READER
CXB1	BASE
MU43	MOTOR UNIT
CXC200BU	COVER
171880	DRIVE PARTS

5-8 LEVEL

11/16, 7/8 or 1 INCH WIDTHS

60 CYCLE SYNCHRONOUS MOTOR

107 CPS


April 1, 1968

TT-463/UG

TELETYPE MODEL CX HIGH SPEED TAPE READER SET

CX800	Reader
CXB1	Base
MU43	Motor Unit
CXC200BU	Cover
171880	Drive Parts

8-Level
1" Width
60 Cycle Synchronous Motor
107 cps

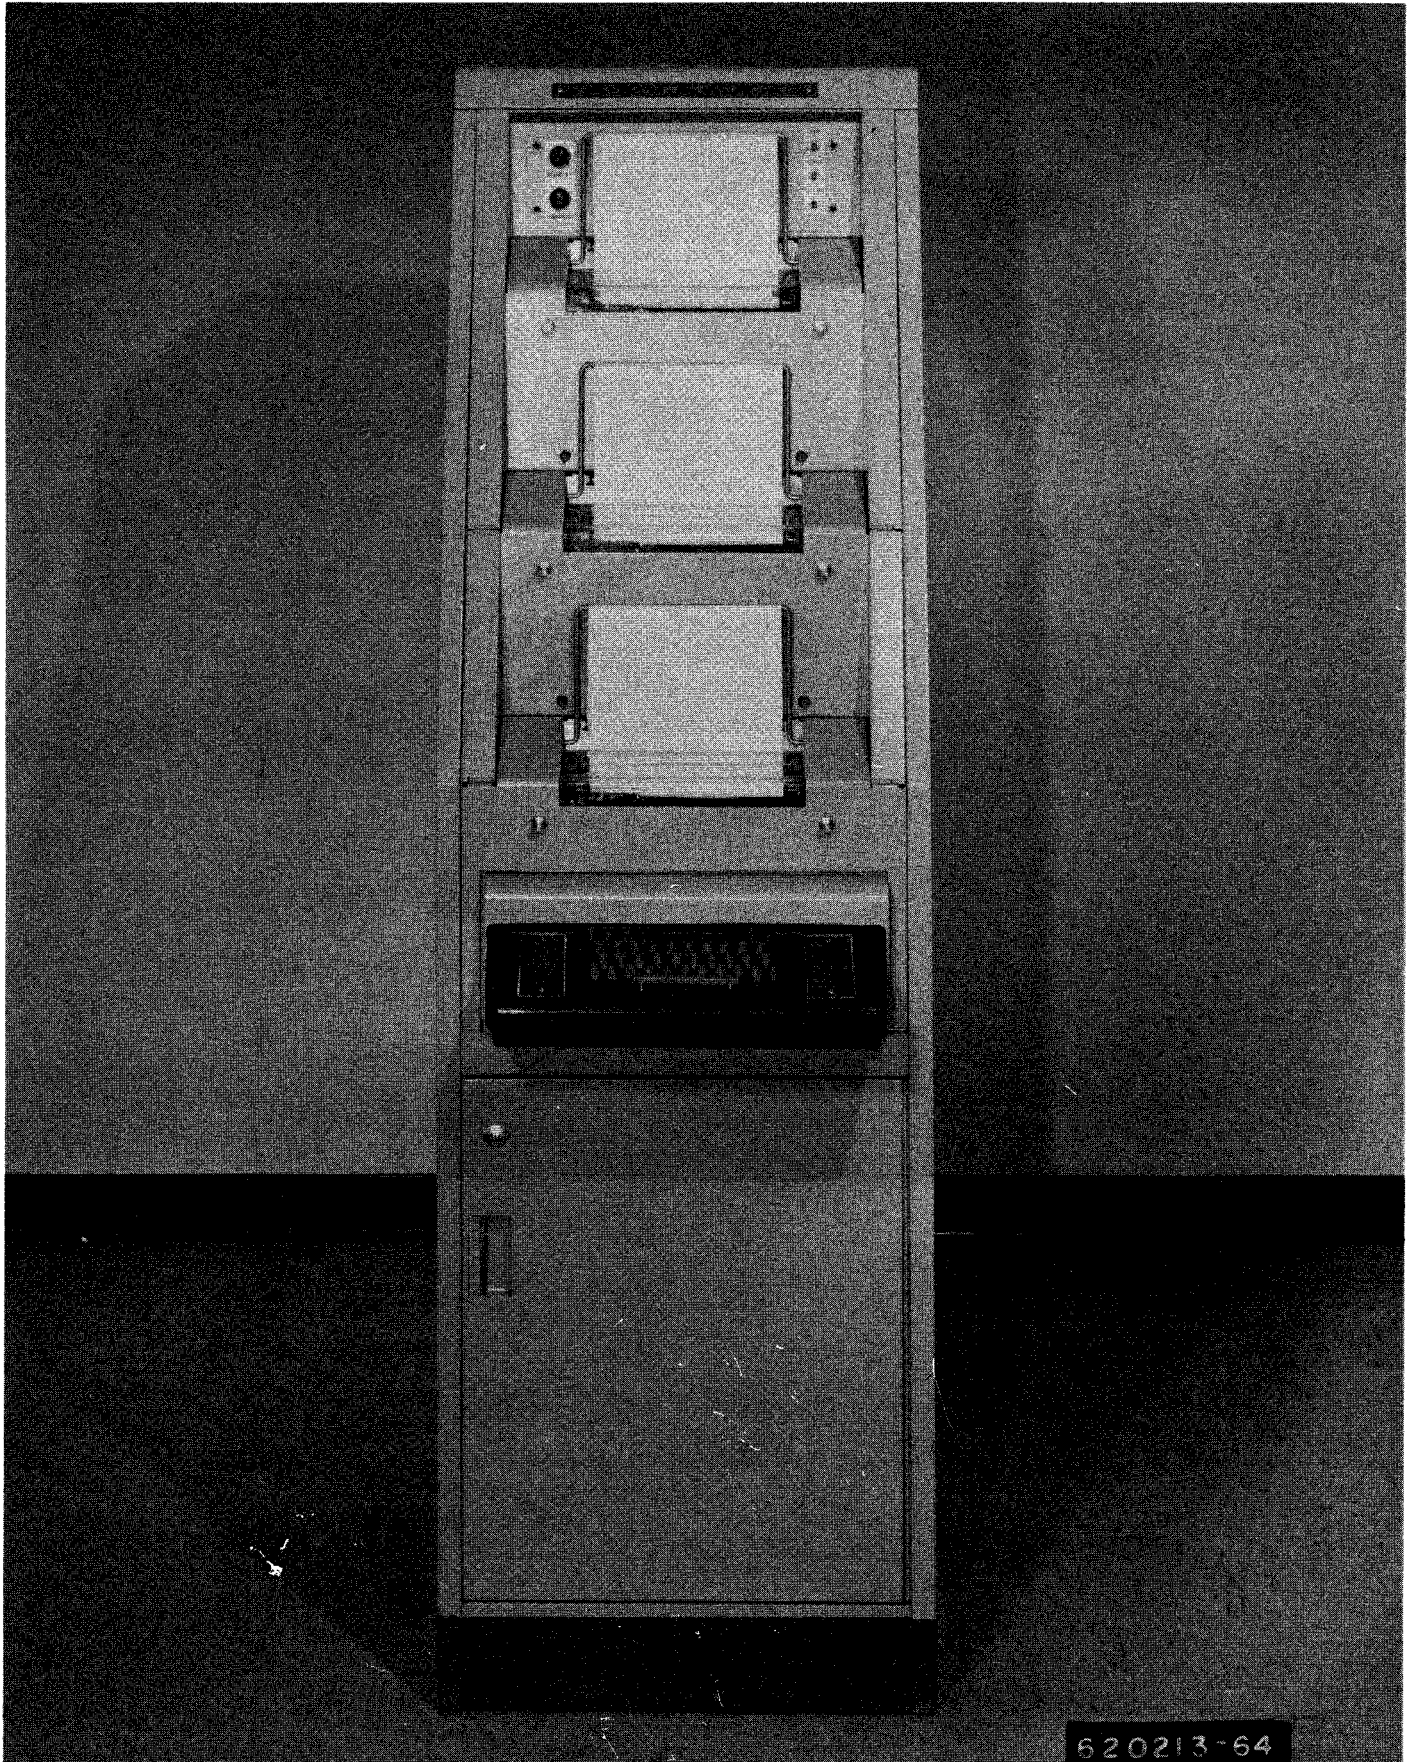

620213-64

M28 MULTIPLE (STACK) MOUNTED SEND-RECEIVE
PAGE PRINTER SET

April 1, 1968

AN/FGC-69

TELETYPE MODEL 28 PAGE PRINTER MONITOR GROUP

LBAC233BR	Cabinet
(3) LP103WY/AHM	Typing Unit
LK29BRE	Keyboard
(2) LMU21	Motor Unit
LMU3	Motor Unit
(3) 161293	Set of Gears (60 WPM)
(3) 161294	Set of Gears (75 WPM)
(3) 161295	Set of Gears (100 WPM)

Running Spares

(5) 7835	Ribbon
(2) 129919	Fuse
(3) 151982	Lamp
(2) 162360	Fuse

7.42 UNIT CODE, FRICTION FEED
60 HZ SYNCHRONOUS MOTORS
WIRED FOR POLAR OPERATION
ON-LINE OFF-LINE SHIFT CONTROL
AUTOMATIC LINE FEED AND CARRIAGE RETURN
STUNT BOX SEQUENCE: SIX F's, FOUR H's,
and SIX D's

April 1, 1968

AN/FGC-69X

TELETYPE MODEL 28 PAGE PRINTER MONITOR GROUP

LBAC233BR	Cabinet
(3) LP103WY/AHM	Typing Unit
LK29BRE	Keyboard
(2) LMU28	Motor Unit
LMU41	Motor Unit
(3) 161293	Set of Gears (60 WPM)
(3) 161294	Set of Gears (75 WPM)
(3) 161295	Set of Gears (100 WPM)

Running Spares

(5) 7835	Ribbon
(4) 122205	Brush
(2) 129919	Fuse
(2) 162360	Fuse
(3) 151982	Lamp

Same as AN/FGC-69 except has 50/60 HZ
Series Governed Motors

April 1, 1968

AN/FGC-74

TELETYPE MODEL 28 MULTIPLE

PAGE PRINTER MONITOR CONSOLE SET

(3) LP109RN/AY	Typing Unit	TT-386/UG
LK36ARN	Keyboard	TT-385/UG
LBAC241BR	Cabinet	CY-3689/FGC-74
(2) LMU21	Motor Unit	PD-96/UG
LMU3	Motor Unit	PD-17A/U
(3) 173795	Set of Gears (45.5 Baud)	
(3) 163504	Set of Gears (50 Baud)	
(3) 163505	Set of Gears (75 Baud)	

7.00 Unit code
Synchronous motor
No stepping in keyboard
Four (4) pairs of leads instead of the eight (8) required
for Order Wire
Basic functions in "Stunt Box"

April 1, 1968

AN/FGC-74A

TELETYPE MODEL 28 MULTIPLE PAGE PRINTER SET

(3) LP109RN/AY	Typing Unit	TT-386/UG
LK51ARN	Keyboard	TT-500/UG
LBAC261BR	Cabinet	CY-4786/FGC-74A
(2) LMU21	Motor Unit	PD-96/UG
LMU3	Motor Unit	PD-17A/U
(3) 163505	Set of Gears (75.0 Baud)	

Synchronous motor - 60 cycle

Same as AN/FGC-74 except set contains gold plated contacts
in keyboard and two tube drivers in cabinet

April 1, 1968

AN/FGC-74X

TELETYPE MODEL 28 MULTIPLE

PAGE PRINTER MONITOR CONSOLE SET

(3) LP109RN/AY	Typing Unit	TT-386/UG
LK36ARN	Keyboard	TT-385/UG
LBAC241BR	Cabinet	CY-3689/FGC-74
(2) LMU28	Motor Unit	PD-97/UG
LMU41	Motor Unit	PD-18A/U
104986	Speed Indicator	
(3) 173795	Set of Gears (45.5 Baud)	
(3) 163504	Set of Gears (50 Baud)	
(3) 163505	Set of Gears (75 Baud)	

Same as AN/FGC-74 except equipped with series governed motor

April 1, 1968

AN/FGC-79

TELETYPE MODEL 28 MULTIPLE

PAGE PRINTER MONITOR CONSOLE SET

(3) LP113RN/AY	Typing Unit	TT-418/FG
LK39ARN	Keyboard	TT-417/UG
LBAC248BR	Cabinet	CY-4166/FGC-79
(2) LMU21	Motor Unit	PD-96/UG
LMU3	Motor Unit	PD-17A/U
(3) 161293	Set of Gears (60 WPM)	
(3) 161295	Set of Gears (100 WPM)	
170573	Rectifier	
139380	Connector	

7.42 Unit code
Synchronous motor
Gears for 45.5 and 74.2 Baud
No stepping in keyboard
Basic functions in "Stunt Box"
Switchable keyboard for Order Wire operation

January 5, 1970

AN/FGC-79A

TELETYPE MODEL 28 MULTIPLE

PAGE PRINTER MONITOR CONSOLE SET

(3) LP113WY/AY	Typing Unit	TT-418/FG
LK11BRJ	Keyboard	TT-387/UG
LBAC248BR	Cabinet	CY-4166/FGC-79
(2) LMU21	Motor Unit	PD-96/UG
LMU3	Motor Unit	PD-17A/U
(3) 161293	Set of Gears (60 WPM)	
(3) 161295	Set of Gears (100 WPM)	
170573	Rectifier	
139380	Connector	
193659	Modification Kit (Drive Parts)	

Same as AN/FGC-79 except this set includes "stepping" in keyboard

January 5, 1970

AN/FGC-79AX

TELETYPE MODEL 28 MULTIPLE

PAGE PRINTER MONITOR CONSOLE SET

(3) LP113WY/AY	Typing Unit	TT-418/FG
LK11BRJ	Keyboard	TT-387/UG
LBAC248BR	Cabinet	CY-4166/FGC-79
(2) LMU52	Motor Unit	PD-109/UG
LMU38	Motor Unit	PD-108/UG
(3) 159660	Set of Gears (60 WPM)	
(3) 159700	Set of Gears (100 WPM)	
146901	Rectifier	
139380	Connector	
193659	Modification Kit (Drive Parts)	

Same as AN/FGC-79A except equipped with 50 cycle motors in place of 60 cycle and appropriate gear sets

April 1, 1968

AN/FGC-79X

TELETYPE MODEL 28 MULTIPLE

PAGE PRINTER MONITOR CONSOLE SET

(3) LP113RN/AY	Typing Unit	TT-418/FG
LK39ARN	Keyboard	TT-417/UG
LBAC248BR	Cabinet	CY-4166/FGC-79
(2) LMU28	Motor Unit	PD-97/U
LMU41	Motor Unit	PD-18A/U
(3) 161293	Set of Gears (60 WPM)	
(3) 161295	Set of Gears (100 WPM)	
146901	Rectifier	
139380	Connector	

Same as AN/FGC-79 except equipped with series governed motor
in lieu of 60 cycle synchronous motor

April 1, 1968

AN/FGC-96

TELETYPE MODEL 28 MULTIPLE PAGE PRINTER

MONITOR CONSOLE SET

	LBAC255BR	Cabinet	CY-4701/FGC-96
(3)	LP124YD/AJU	Typing Unit	MX-6935/FGC-96
	LK52BRW	Keyboard	MX-6936/FGC-96
(2)	LMU21	Motor Unit	
	LMU3	Motor Unit	
(2)	173795	Gears (45.5 Baud)	
(2)	163505	Gears (75 Baud)	
	195922	Modification Kit	

7.00 Unit Code

60 Cycle Synchronous Motor

Polar Signal Generator Wired For Negative Mark

50 MA Pulsing Magnet

Gearshift Mechanism on Keyboard

April 1, 1968

AN/FGC-96A

TELETYPE MODEL 28 MULTIPLE PAGE PRINTER MONITOR

CONSOLE SET

	LBAC255BR	Cabinet	CY-4701/FGC-96
(3)	LP124RE/AJU	Typing Unit	TT-539/FGC-96A
	LK52ARE	Keyboard	TT-540/FGC-96A
(2)	LMU21	Motor Unit	PD-96/UG
	LMU3	Motor Unit	PD-17A/U
(2)	173795	Gear Set (45.5 Baud)	
(2)	163505	Gear Set (75 Baud)	
	195922	Set of Parts	
	152675	Function Bar	
	152653	Pawl	
	90517	Spring	
	152660	Plate	
	152641	Lever	
	157240	Spring	
	72522	Wick	
	4703	Spring	

7:00 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR
POLAR SIGNAL GENERATOR WIRED FOR NEGATIVE MARK
50 MA PULSING MAGNET
GEAR SHIFT MECHANISM ON KEYBOARD
WEATHER ARRANGEMENT

April 1, 1968

AN/FGC-96X

TELETYPE MODEL 28 MULTIPLE PAGE PRINTER

MONITOR CONSOLE SET

	LBAC255BR	Cabinet	CY-4701/FG
(3)	LP124YD/AJU	Typing Unit	MX-6935/FG
	LK52BRW	Keyboard	MX-6936/FG
(2)	LMU28	Motor Unit	PD-97/U
	LMU41	Motor Unit	PD-18A/U
(2)	173795	Gear Set (45 Baud)	
(2)	163505	Gear Set (75 Baud)	
	195922	Modification Kit (to install paper winder)	
	104986	Tuning Fork	

SAME AS AN/FGC-96 EXCEPT USES SERIES GOVERNED LMU28 AND
LMU41

January 5, 1970

AN/FGC-100

TELETYPE MODEL 28 MULTIPLE PAGE PRINTER SET

(4) LP109WY/AY	Typing Unit	TT-386/UC
LBAC264BR	Cabinet	CY-4787/FGC-100
(4) LMU21	Motor Unit	PD-96/UC
(4) 163505	Set of Gears (75 Baud)	

Set similar to AN/FGC-74 except includes four (4) receive-only printers, no keyboard and includes two tube drivers in cabinet

7.00 Unit Code

60 Cycle Synchronous Motor

December 5, 1969

AN/FGC-100A

TELETYPE CORPORATION MODEL 28
MULTIPLE PAGE PRINTER SET

(4)	LP109WY/AJE	TYPING UNIT	
	LBAC264BR	CABINET	CY-4787/FGC-100
(4)	LMU21	MOTOR UNIT	PD-96/UG
(4)	163505	SET OF GEARS (75 BAUD)	

SET SIMILAR TO AN/FGC-74 EXCEPT INCLUDES FOUR (4) RECEIVE-ONLY
PRINTERS, NO KEYBOARD AND INCLUDES TWO TUBE DRIVERS IN CABINET
AND HAS REPERFORATOR CONTROL

7.00 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR

January 5, 1970

AN/FGC-101

TELETYPE MODEL 28 MULTIPLE PAGE PRINTER SET

(4)	LP109WY/AY	Typing Unit	TT-386/UG
	LBAC264BR	Cabinet	CY-4787/FGC-100
(4)	LMU52	Motor Unit	P-109/UG
(4)	312705	Set of Gears (75 Baud)	

Set same as AN/FGC-100 except includes motors for 50 cycle operation

January 5, 1970

EXHIBIT

AN/UGC-61

TELETYPE CORPORATION M-28 LOW-LEVEL ASSEMBLED
MULTIPLE PAGE PRINTER MONITOR CONSOLE SET

CODED 28-RFL7300A/012/AAA/BR CONSISTING OF:

- (3) LP149WY/AJG TYPING UNIT
28-RFC7300A/012/AAA/BR ASSEMBLED SUB-COMPONENTS C/O:
- | | |
|------------|--------------------------------------|
| LBAC280BR | CABINET ASSEMBLY, MULTI-PAGE PRINTER |
| 332726 | ELECTRICAL SERVICE ASSEMBLY |
| LK71/BRJ | KEYBOARD |
| (2) LMU21 | MOTOR UNIT |
| LMU3 | MOTOR UNIT |
| (3) 161295 | SET OF GEARS (74.2 BAUD) |
| (2) 321290 | REGULATOR ASSEMBLY |
| 303142 | CARD ASSEMBLY, KEYS |
| (3) 323810 | CARD ASSEMBLY, SMD |
| 321991 | CARD ASSEMBLY, CMD |
| 326780 | PLATE, IDENTIFICATION |
| (6) 151982 | LAMP, INCANDESCENT 6V 6W |
| (6) 179372 | SHIELD, LIGHT |
| (6) 74889 | PLATE, NUT |
| 193659 | MOD. KIT: DRIVE PARTS |
| 327348 | CABLE ASSEMBLY |
| 327349 | CABLE ASSEMBLY |
| 326753 | CABLE ASSEMBLY |
| 327359 | CABLE ASSEMBLY |
| 327360 | CABLE ASSEMBLY |
| 332851 | CABLE ASSEMBLY |
| 332852 | CABLE ASSEMBLY |
| 332854 | CABLE ASSEMBLY |
| 327375 | COVER |
| ASSEMBLY | |

OPTIONAL

- (3) 161293 SET OF GEARS (45.5 BAUD) - AGA

7.42 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD OF THE
74.2 BAUD SHOWN IN THE RFL AND RFC CODES WILL CHANGE.

NOVEMBER 1, 1970

EXHIBIT

AN/UGC-61A

TELETYPE CORPORATION M-28 LOW-LEVEL ASSEMBLED
MULTIPLE PAGE PRINTER MONITOR CONSOLE SET

CODED 28-RFL7302A/012/AAA/BR CONSISTING OF:

(3)	LP149WY/AJG	TYPING UNIT
	28-RFC7302A/012/AAA/BR	ASSEMBLED SUB-COMPONENTS C/O:
	LBAC285BR	CABINET ASSEMBLY, MULTI-PAGE PRINTER
	332726	ELECTRICAL SERVICE ASSEMBLY
	LK71/BRJ	KEYBOARD
(2)	LMU21	MOTOR UNIT
	LMU3	MOTOR UNIT
(3)	161295	SET OF GEARS (74.2 BAUD)
(2)	321290	REGULATOR ASSEMBLY
	303142	CARD ASSEMBLY, KEYS
(3)	323810	CARD ASSEMBLY, SMD
	321991	CARD ASSEMBLY, CMD
	326780	PLATE, IDENTIFICATION
(6)	151982	LAMP, INCANDESCENT 6V 6W
(6)	179372	SHIELD, LIGHT
(6)	74889	PLATE, NUT
	193659	MOD. KIT: DRIVE PARTS
	327348	CABLE ASSEMBLY
	327349	CABLE ASSEMBLY
	326753	CABLE ASSEMBLY
	327359	CABLE ASSEMBLY
	327360	CABLE ASSEMBLY
	332851	CABLE ASSEMBLY
	332852	CABLE ASSEMBLY
	332854	CABLE ASSEMBLY
	327375	COVER
	ASSEMBLY	

(3) OPTIONAL
161293 SET OF GEARS (45.5 BAUD) - AGA

7.42 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE
INCLUDES IMPROVED STRUCTURAL RIGIDITY OF CABINETS

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO ASSEMBLED INSTEAD OF THE
74.2 BAUD SHOWN, THE RFL AND RFC CODES WILL CHANGE.

January 5, 1970

EXHIBIT

AN/UGC-61X

TELETYPE CORPORATION M-28 LOW-LEVEL ASSEMBLED
MULTIPLE PAGE PRINTER MONITOR CONSOLE SET

CODED 28-RFL7300A/012/AJA/BR CONSISTING OF:

- (3) LP149WY/AJG TYPING UNIT
28-RFC7300A/012/AJA/BR ASSEMBLED SUB-COMPONENTS C/O:
- | | |
|------------|--------------------------------------|
| LBAC280BR | CABINET ASSEMBLY, MULTI-PAGE PRINTER |
| 332726 | ELECTRICAL SERVICE ASSEMBLY |
| LK71/BRJ | KEYBOARD |
| (2) LMU52 | MOTOR UNIT |
| LMU38 | MOTOR UNIT |
| (3) 159700 | SET OF GEARS (74.2 BAUD) |
| (2) 321290 | REGULATOR ASSEMBLY |
| 303142 | CARD ASSEMBLY, KEYS |
| (3) 323810 | CARD ASSEMBLY, SMD |
| 321991 | CARD ASSEMBLY, CMD |
| 326780 | PLATE, IDENTIFICATION |
| (6) 151982 | LAMP, INCANDESCENT 6V 6W |
| (6) 179372 | SHIELD, LIGHT |
| (6) 74889 | PLATE, NUT |
| 193659 | MOD. KIT: DRIVE PARTS |
| 327348 | CABLE ASSEMBLY |
| 327349 | CABLE ASSEMBLY |
| 326753 | CABLE ASSEMBLY |
| 327359 | CABLE ASSEMBLY |
| 327360 | CABLE ASSEMBLY |
| 332851 | CABLE ASSEMBLY |
| 332852 | CABLE ASSEMBLY |
| 332854 | CABLE ASSEMBLY |
| 327375 | COVER |
| ASSEMBLY | |

OPTIONAL

- (3) 159660 SET OF GEARS (45.5 BAUD) - ALA

7.42 UNIT CODE
SYNCHRONOUS MOTOR - 50 CYCLE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF + 6V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD OF THE
74.2 BAUD SHOWN IN THE RFL AND RFC CODES WILL CHANGE.

January 5, 1970

EXHIBIT

AN/UGC-61Y

TELETYPE CORPORATION MODEL 28 LOW-LEVEL ASSEMBLED
MULTIPLE PAGE PRINTER MONITOR CONSOLE SET

CODED 28-RFL7300A/C12/ABA/BR CONSISTING OF:

(3)	LP149WY/AJG	TYPING UNIT
	28-RFC7300A/012/ABA/BR	ASSEMBLED SUB-COMPONENTS C/O:
	LBAC280BR	CABINET ASSEMBLY, MULTI-PAGE PRINTER
	332726	ELECTRICAL SERVICE ASSEMBLY
	LK71/BRJ	KEYBOARD
(2)	LMU28	MOTOR UNIT
	LMU41	MOTOR UNIT
(3)	161295	SET OF GEARS (74.2 BAUD)
(2)	321290	REGULATOR ASSEMBLY
	303142	CARD ASSEMBLY, KEYS
(3)	323810	CARD ASSEMBLY, SMD
	321991	CARD ASSEMBLY, CMD
	326780	PLATE, IDENTIFICATION
(6)	151982	LAMP, INCANDESCENT 6V 6W
(6)	179372	SHIELD, LIGHT
(6)	74889	PLATE, NUT
	193659	MOD. KIT - DRIVE PARTS
	327348	CABLE ASSEMBLY
	327349	CABLE ASSEMBLY
	326753	CABLE ASSEMBLY
	327359	CABLE ASSEMBLY
	327360	CABLE ASSEMBLY
	332851	CABLE ASSEMBLY
	332852	CABLE ASSEMBLY
	332854	CABLE ASSEMBLY
	327375	COVER
	ASSEMBLY	

7.42 UNIT CODE
SERIES GOVERNED MOTOR - 50/60 CYCLE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

NOTE: IF OPTIONAL GEARS ARE TO BE ASSEMBLED INSTEAD OF
THE 74.2 BAUD SHOWN, THE RFL AND RFC CODES WILL CHANGE.

January 5, 1970

EXHIBIT

AN/UGR-10

TELETYPE CORPORATION MODEL 28 LOW-LEVEL ASSEMBLED
R/O MULTIPLE PAGE PRINTER MONITOR CONSOLE SET

CODED 28-RFL7400B/012/AMB/BR CONSISTING OF:

- (4) LP150WY/AJG TYPING UNIT
- 28-RFC7400B/012/AMB/BR ASSEMBLED SUB-COMPONENTS C/O:
 - LBAC281BR CABINET ASSEMBLY
 - (4) LMU 21 MOTOR UNIT
 - (4) 163505 GEAR SET
 - 332727 ELECTRICAL SERVICE ASSEMBLY
 - (1) 312693 CABLE ASSEMBLY
 - 332855 CABLE ASSEMBLY
 - 332856 CABLE ASSEMBLY
 - 312715 IDENTIFICATION PLATE
 - 312716 IDENTIFICATION PLATE
 - (8) 151982 LAMP, INCANDESCENT
 - (8) 179372 SHIELD
 - (8) 74889 PLATE
 - 321228 ELECTRICAL SERVICE ASSEMBLY
 - 321132 CIRCUIT CARD ASSEMBLY
 - (4) 323810 SELECTOR MAGNET DRIVER ASSEMBLY
 - 326779 BRACKET
 - (2) 325956 CONNECTOR
 - (2) 325939 CONNECTOR
 - 327353 CONDUIT
 - 327354 CONDUIT
 - 327347 CABLE ASSEMBLY
 - 327361 CABLE ASSEMBLY
 - 327351 POWER BOX ASSEMBLY
 - 327352 COVER
 - (2) 325961 TERMINAL BLOCK
 - (2) 325959 INSULATOR
 - (2) 327478 STRAP
 - 327477 STRAP

ASSEMBLY

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

JUNE 1, 1971

EXHIBIT

AN/UGR-10A

TELETYPE CORPORATION MODEL 28 LOW-LEVEL ASSEMBLED
R/O MULTIPLE PAGE PRINTER MONITOR CONSOLE SET

CODED 28-RFL7402B/012/AMB/BR CONSISTING OF:

(4)	LP150WY/AJG	TYPING UNIT
	28-RFC7402B/012/AMB/BR	ASSEMBLED SUB-COMPONENTS C/O:
	LBAC286BR	CABINET ASSEMBLY
(4)	LMU21	MOTOR UNIT
(4)	163505	GEAR SET
	332727	ELECTRICAL SERVICE ASSEMBLY
(1)	312693	CABLE ASSEMBLY
	332855	CABLE ASSEMBLY
	332856	CABLE ASSEMBLY
	312715	IDENTIFICATION PLATE
	312716	IDENTIFICATION PLATE
(8)	151982	LAMP, INCANDESCENT
(8)	179372	SHIELD
(8)	74889	PLATE
	321228	ELECTRICAL SERVICE ASSEMBLY
	321132	CIRCUIT CARD ASSEMBLY
(4)	323810	SELECTOR MAGNET DRIVER ASSEMBLY
	326779	BRACKET
(2)	325956	CONNECTOR
(2)	325939	CONNECTOR
	327353	CONDUIT
	327354	CONDUIT
	327347	CABLE ASSEMBLY
	327361	CABLE ASSEMBLY
	327351	POWER BOX ASSEMBLY
	327352	COVER
(2)	325961	TERMINAL BLOCK
(2)	327478	STRAP
	327477	STRAP

ASSEMBLY

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 60 CYCLE
INCLUDES IMPROVED STRUCTURAL RIGIDITY OF CABINETS
INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

January 5, 1970

EXHIBIT

AN/UGR-10X

TELETYPE CORPORATION MODEL 28 LOW-LEVEL ASSEMBLED
R/O MULTIPLE PAGE PRINTER MONITOR CONSOLE SET

CODED 28-RFL7400B/012/AZB/BR CONSISTING OF:

(4)	LP150WY/AJG	TYPING UNIT
	28-RFC7400B/012/AZB/BR	ASSEMBLED SUB-COMPONENTS C/O:
	LBAC281BR	CABINET ASSEMBLY
(4)	LMU52	MOTOR UNITS
(4)	312705	GEAR SET
	332727	ELECTRICAL SERVICE ASSEMBLY
(1)	312693	CABLE ASSEMBLY
	332855	CABLE ASSEMBLY
	332856	CABLE ASSEMBLY
	312715	IDENTIFICATION PLATE
	312716	IDENTIFICATION PLATE
(8)	151982	LAMP
(8)	179372	SHIELD
(8)	74889	PLATE
	321228	ELECTRICAL SERVICE ASSEMBLY
	321132	CIRCUIT CARD ASSEMBLY
(4)	323810	SELECTOR MAGNET DRIVER ASSEMBLY
	326779	BRACKET
(2)	325956	CONNECTOR
(2)	325939	CONNECTOR
	327353	CONDUIT
	327354	CONDUIT
	327347	CABLE ASSEMBLY
	327361	CABLE ASSEMBLY
	327351	POWER BOX ASSEMBLY
	327352	COVER
(2)	325961	TERMINAL BLOCK
(2)	325959	INSULATOR
(2)	327478	STRAP
	327477	STRAP

ASSEMBLY

7.00 UNIT CODE
SYNCHRONOUS MOTOR - 50 CYCLE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

May 1, 1971

EXHIBIT

AN/UGR-10Y

TELETYPE CORPORATION MODEL 28 LOW-LEVEL ASSEMBLED
R/O MULTIPLE PAGE PRINTER MONITOR CONSOLE SET

CODED 28-RFL7400B/004/ANB/BR CONSISTING OF:

(4)	LP150WY/AJG	TYPING UNIT
	28-RFC7400B/004/ANB/BR	ASSEMBLED SUB-COMPONENTS C/O:
	LBAC281BR	CABINET ASSEMBLY
(4)	IMU28	MOTOR UNIT
(4)	163505	GEAR SET
	332727	ELECTRICAL SERVICE ASSEMBLY
(1)	312693	CABLE ASSEMBLY
	332855	CABLE ASSEMBLY
	332856	CABLE ASSEMBLY
	312715	IDENTIFICATION PLATE
	312716	IDENTIFICATION PLATE
(8)	151982	LAMP, INCANDESCENT
(8)	179372	SHIELD
(8)	74889	PLATE
	321228	ELECTRICAL SERVICE ASSEMBLY
	321132	CIRCUIT CARD ASSEMBLY
(4)	323810	SELECTOR MAGNET DRIVER ASSEMBLY
	326779	BRACKET
(2)	325956	CONNECTOR
(2)	325939	CONNECTOR
	327353	CONDUIT
	327354	CONDUIT
	327347	CABLE ASSEMBLY
	326361	CABLE ASSEMBLY
	327351	POWER BOX ASSEMBLY
	327352	COVER
(2)	325961	TERMINAL BLOCK
(2)	325959	INSULATOR
(2)	327478	STRAP
	327477	STRAP

ASSEMBLY

7.00 UNIT CODE
SERIES GOVERNED 50/60 CYCLE

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL
COMPONENTS TO MEET SIGNAL LINE INTERFACE REQUIREMENTS
OF +6 V STATED IN MIL-STD-188B.

April 1, 1968

TS-2/TG

TELETYPE SIGNAL DISTORTION TEST SET

(CODE DISK OPERATED)

PORTABLE

CONSISTING OF:

ED57GG

TEST SET

107009

CHEST

April 1, 1968

TS-383A/GG

TELETYPE SIGNAL DISTORTION TEST SET

SAME AS TS-383/GG

(CODE DISC OPERATED WITH STROBOSCOPE)

SERIES GOVERNED MOTOR

CONSISTING OF:

*DXD200AA	TEST SET
96572	GEARS FOR 60 WPM
103628	SPEED INDICATOR
MU26	MOTOR UNIT

EQUIPMENT

SPARE PARTS AS PROVISIONED BY NAVY

115807 for DXD

115803 for MU26

*DXD200 - NOW INCLUDES SET OF PARTS 115836 FOR FIELD
INSTALLATION TO PROVIDE CALL LETTER AS REQUIRED.

April 1, 1968

TS-383B/GG

TELETYPE SIGNAL DISTORTION TEST SET

(CODE DISC OPERATED WITH STROBOSCOPE)

CONTAINS BOTH SYNCHRONOUS AND SERIES GOVERNED MOTORS

CONSISTING OF:

DXD200AA	TEST SET
MU4	SYNCHRONOUS MOTOR UNIT
96473	GEARS FOR 60 WPM
110897	GEARS FOR 100 WPM
MU26	SERIES GOVERNED MOTOR UNIT
96572	GEARS FOR 60 WPM
113210	GEARS FOR 100 WPM
103628	SPEED INDICATOR

April 1, 1968

TS-652/GG

TELETYPE SIGNAL DISTORTION TEST SET

(CODE DISC OPERATED WITH STROBOSCOPE)

SYNCHRONOUS MOTOR

CONSISTING OF:

DXD200AA	TEST SET	
96473	SET OF GEARS FOR 60 WPM	
MU4	MOTOR UNIT	PD-22/UG

April 1, 1968

TS-658/UG

TELETYPE SIGNAL DISTORTION TEST SET

(CODE DISK OPERATED)

PORTABLE

CONSISTING OF:

ED51DT

TEST SET

April 1, 1968

TS-659/UG

TELETYPE SIGNAL DISTORTION TEST SET

(CODE DISK OPERATED)

PORTABLE

CONSISTING OF :

ED58HE

TELETYPE
PART NUMBEREQUIPMENT
USED ONNAVY
NOMENCLATURESTOCK NUMBER

321193	AN/FGC-100	MK-1099/UG	2Z5815-053-4258
321215	TT-187/UG, TT-187A, TT-187B, TT-187C, TT-273	MK-1100/UG	2Z5815-053-4265
321216	MX-3311/UG, MX-1115/UG	MK-1111/UG	2Z5815-058-1216
321218	TT-315/UG, TT-316, TT-317	MK-1117/UG	2Z5815-058-1198
323116	AN/UGC-20	MK-1158/UG	2Z5815-921-8356
323800	TT-47D, TT-47E, TT-47H, TT-47J, TT-47F, TT-48F	MK-1081/UG	2Z5815-877-9514
323801	TT-69C, TT-69D, TT-176A, TT-176C, AN/UGC-22A	MK-1082/UG	2Z5815-877-9516
323802	TT-253, TT-253A, TT-253C, TT-292	MK-1083/UG	2Z5815-877-9520
323803	TT-171	MK-1084/UG	2Z5815-877-9523
323804	TT-171A, TT-171C, TT-283	MK-1085/UG	2Z5815-877-9526
323805	TT-192, TT-192A, TT-274, TT-274A	MK-1086/UG	2Z5815-877-9531
323806	AN/UGC-5, AN/UGC-5X	MK-1087/UG	2Z5815-877-8999
323807	AN/UGC-6, AN/UGC-6A, AN/UGC-6BX, AN/UGC-6F	MK-1088/UG	2Z5815-877-9012

<u>TELETYPE PART NUMBER</u>	<u>EQUIPMENT USED ON</u>	<u>NAVY NOMENCLATURE</u>	<u>STOCK NUMBER</u>
323808	AN/UGC-13, AN/UGC-13AX AN/UGC-16, AN/UGC-32X	MK-1089/UG	2Z5815-877-9020
323809	AN/UGC-25, AN/UGC-25X	MK-1090/UG	2Z5815-877-9065
323816	AN/FGC-74, AN/FGC-74X AN/FGC-79, AN/FGC-79A, AN/FGC-79AX	MK-1098/UG	2Z5815-053-4254
323823	TT-331/UG, TT-331A, TT-403A, AN/FGR-5A	MK-1110/UG	2Z5815-058-1205
323826	Maintenance Kit for 321215		
323827	Maintenance Kit for RO's and ROTR's		
323828	Maintenance Kit for KSR's and ASR's		
324051	TT-311/UG	MK-1116/UG	2Z5815-058-1197
324052	MX-3310/UG	MK-1112/UG	2Z5815-058-1217
324053	MX-3312/UG	MK-1113/UG	2Z5815-058-1227
324056	TT-306/UG, TT-306A	MK-1114/UG	2Z5815-058-1195
324057	TT-307/UG, TT-307A	MK-1115/UG	2Z5815-058-1196
326764	TT-332/UG, TT-332A, TT-404A, AN/FGR-6A w/o seizure	MK-1101/UG	2Z5815-053-4294
327472BR	TT-308/UG	MK-1136/UG	2Z5815-017-3470

September 15, 1950

TELETYPE
PART NUMBER

EQUIPMENT
USED ON

NAVY
NOMENCLATURE

STOCK NUMBER

327473BR

TT-309/UG

MK-1137/UG

2Z5815-017-3582

329276

Maintenance Kit for
323116 (Used with
323828)

330720

Polar Neutral Converter

MK-1135/UG

330741

Maintenance Kit for
Polar-Neutral Converter

2Z5815-135-0087

333046BR

TT-332/UG, 332A,
404A w/seizure

May 1, 1971

EXHIBIT

AN/UGC-83

TELETYPE CORPORATION MODEL 37
AUTOMATIC SEND-RECEIVE PAGE PRINTER SET

CODED 37/302-4E CONSISTING OF:

37P004/001/AH	TYPING UNIT
37C002/001/AK/MK	CONSOLE ASSEMBLY
37T002/AP/003/MK	TABLE ASSEMBLY
37501DA/XXX/AB/003/AB/MK	RT MODULE
330697GF	FORM ACCUMULATING SHELF
328284GF	PAPER SUPPLY BOX

10 UNIT CODE
60 CYCLE SYNCHRONOUS MOTOR 115V AC
FLOOR CONSOLE
150 BAUD - USASX3.4 ASCII 7-LEVEL
EIA RS-232-B
COLOR: CHARCOAL GRAY AND IVORY

June 15, 1971

EXHIBIT

AN/UGC-88

TELETYPE CORPORATION M37 ASSEMBLED
LOW-LEVEL AUTOMATIC SEND-RECEIVE DATA
COMMUNICATIONS TERMINAL CONSISTING OF:

CATALOG NO. 37/380-1C

37480DC/003/AF/001/AB/MK	-	KEYBOARD CONSOLE ASSEMBLY C/O:
37T800/XXX/AF/001/XX/MK	-	TABLE ASSEMBLY
37C800/003/AA/XXX/XX/MK	-	CONSOLE ASSEMBLY
37P801/001/XX/XXX/AB	-	TYPING UNIT
37580DC/000/AA/001/AA/MK	-	PUNCH AND READER MODULE ASSEMBLY
333158	-	SET OF PARTS - FANFOLD RACK
328672	-	SET OF PARTS - FORM ACCUMULATOR

USASX3.4 ASCII 7-LEVEL CODE
150 BAUD - 50/60 HZ 115V AC (TRIAC CONTROL) TD-50/60 HZ SYNC.
SERIAL INPUT AND OUTPUT - 10 UNIT CODE
SPROCKET PLATEN 8½" - 6 ROW TYPE BOX - TWO COLOR PRINTING
96 PALLET POSITIONS W/94 GRAPHICS
NO PRINTING ON TAPE - FULLY PERFORATED TAPE
KEYBOARD 4 ROW - 128 CODE COMBINATIONS
W/5 (BAUDOT) 8 (ASCII) CODE CONVERSION AND SPEED SHIFTING FEATURES
CHARCOAL GRAY AND IVORY FINISH

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL COMPONENTS TO MEET
SIGNAL LINE INTERFACE REQUIREMENTS OF ±6 V STATED IN MIL-STD-183C.

September 21, 1970

EXHIBIT

AN/UGC-89

TELETYPE CORPORATION M37 ASSEMBLED
LOW-LEVEL KEYBOARD SEND-RECEIVE DATA
COMMUNICATIONS TERMINAL CONSISTING OF:

CATALOG NO. 37/480-1D

37480DC/003/AA/001/AB/MK	-	KEYBOARD CONSOLE ASSEMBLY C/O:
37T800/XXX/AE/001/XX/MK	-	TABLE ASSEMBLY
37C800/003/AA/XXX/XX/MK	-	CONSOLE ASSEMBLY
37P801/001/XX/XXX/AB	-	TYPING UNIT
333158	-	SET OF PARTS - FANFOLD RACK
328672	-	SET OF PARTS - FORM ACCUMULATOR

USASX3.4 ASCII 7-LEVEL CODE
150 BAUD - 50/60 HZ 115 V AC (TRIAC CONTROL)
SERIAL INPUT AND OUTPUT - 10 UNIT CODE
SPROCKET PLATEN 8½" - 6 ROW TYPE BOX - TWO COLOR PRINTING
96 PALLET POSITIONS W/94 GRAPHICS
KEYBOARD 4 ROW - 128 CODE COMBINATIONS
W/5 (BAUDOT) 8 (ASCII) CODE CONVERSION AND SPEED SHIFTING FEATURES
CHARCOAL GRAY AND IVORY FINISH

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL COMPONENTS TO MEET
SIGNAL LINE INTERFACE REQUIREMENTS OF +6 V STATED IN MIL-STD-188C.

JUNE 1, 1971

EXHIBIT

AN/UGC-92

TELETYPE CORPORATION M37 ASSEMBLED
LOW-LEVEL AUTOMATIC SEND-RECEIVE DATA
COMMUNICATIONS TERMINAL CONSISTING OF:

CATALOG NO. 37/380-1A

37480DC/004/AB/001/AC/MK	-	KEYBOARD CONSOLE ASSEMBLY C/O:
37T800/XXX/AB/001/XX/MK	-	TABLE ASSEMBLY
37C800/003/AA/XXX/XX/MK	-	CONSOLE ASSEMBLY
37P802/004/XX/XXX/AC	-	TYPING UNIT
37580DC/000/AA/001/AA/MK	-	PUNCH AND READER MODULE ASSEMBLY
333158	-	SET OF PARTS - FANFOLD RACK
328672	-	SET OF PARTS - FORM ACCUMULATOR

USASX3.4 ASCII 7-LEVEL CODE
150 BAUD - 50/60 HZ 115V AC
SERIAL INPUT AND OUTPUT - 10 UNIT CODE
SPROCKET PLATEN 9½" - 6 ROW TYPE BOX - TWO COLOR PRINTING
12 CHARACTERS PER INCH - 96 PALLET POSITIONS W/94 GRAPHICS
NO PRINTING ON TAPE - FULLY PERFORATED TAPE
KEYBOARD 4 ROW - 128 CODE COMBINATIONS
CHARCOAL GRAY AND IVORY FINISH

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL COMPONENTS TO MEET
SIGNAL LINE INTERFACE REQUIREMENTS OF +6 V STATED IN MIL-STD-188C.

NOVEMBER 1, 1970

EXHIBIT

AN/UGC-93

TELETYPE CORPORATION M37 ASSEMBLED
LOW-LEVEL KEYBOARD SEND-RECEIVE DATA
COMMUNICATIONS TERMINAL CONSISTING OF:

CATALOG NO. 37/480-1A

37480DC/004/AA/001/AC/MK - KEYBOARD CONSOLE ASSEMBLY C/O:
37T800/XXX/AA/001/XX/MK - TABLE ASSEMBLY
37C800/003/AA/XXX/XX/MK - CONSOLE ASSEMBLY
37P802/004/XX/XXX/AC - TYPING UNIT
333158 - SET OF PARTS - FANFOLD RACK
328672 - SET OF PARTS - FORM ACCUMULATOR

USASX3.4 ASCII 7-LEVEL CODE
150 BAUD - 50/60 HZ 115V AC
SERIAL INPUT AND OUTPUT - 10 UNIT CODE
SPROCKET PLATEN 9½" - 6 ROW TYPE BOX - TWO COLOR PRINTING
12 CHARACTERS PER INCH - 96 PALLET POSITIONS W/94 GRAPHICS
KEYBOARD 4 ROW - 128 CODE COMBINATIONS
CHARCOAL GRAY AND IVORY FINISH

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL COMPONENTS TO MEET
SIGNAL LINE INTERFACE REQUIREMENTS OF ±6V STATED IN MIL-STD-188C.

SECTION 14A

February 1, 1971

EXHIBIT

AN/UGR-14

TELETYPE CORPORATION HIGH-SPEED INKTRONIC

RECEIVE-ONLY PAGE PRINTER SET

CODED: 2101AB/013/AA/002/XX/MP

5-LEVEL 7.00 UNIT CODE
600 BAUD (857 WPM)
60 CYCLE SYNCHRONOUS MOTOR

SECTION 14B

~~Unassigned~~

JUNE 1, 1971

EXHIBIT

AN/UGR-15

TELETYPE CORPORATION HIGH-SPEED LOW-LEVEL
INKTRONIC RECEIVE-ONLY PAGE PRINTER SET

CODED: 2111AB/802/RA/801/XX/MQ

SERIAL OPERATION
USASX3.4 ASCII

7-LEVEL 10.00 UNIT CODE FRAME
SPEEDS UP TO 1200 BAUD (120 CHAR/SECOND)

INPUT POWER 115V AC $\pm 10\%$ 60 HZ. ± 0.5 HZ.
FLOOR SIT DOWN CONSOLE CABINET

INCLUDES WIRING AND STANDARD TELETYPE COMMERCIAL COMPONENTS
TO MEET SIGNAL INTERFACE REQUIREMENTS OF ± 6 V STATED IN
MIL-STD-188C.