


NOTICE - WHEN GOVERNMENT DRAWINGS, SPECIFICATIONS, OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE UNITED STATES GOVERNMENT THEREBY INCURS NO RESPONSIBILITY NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE, OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

"THIS DOCUMENT HAS BEEN PURCHASED BY THE GOVERNMENT AND MAY BE REPRODUCED AND USED IN CONNECTION WITH ANY GOVERNMENT PROCUREMENT OR MAINTENANCE OPERATION."

NOTE:
DATA MARKED BY AN ASTERISK(*) ARE FOR INFORMATION ONLY, CONTRACTOR MAY, AT HIS OPTION, DEVIATE FROM THESE DETAILS

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL
B	REDRAWN WITHOUT CHANGE	26 OCT 1962	52713-PAG REV. EL-2 FMS

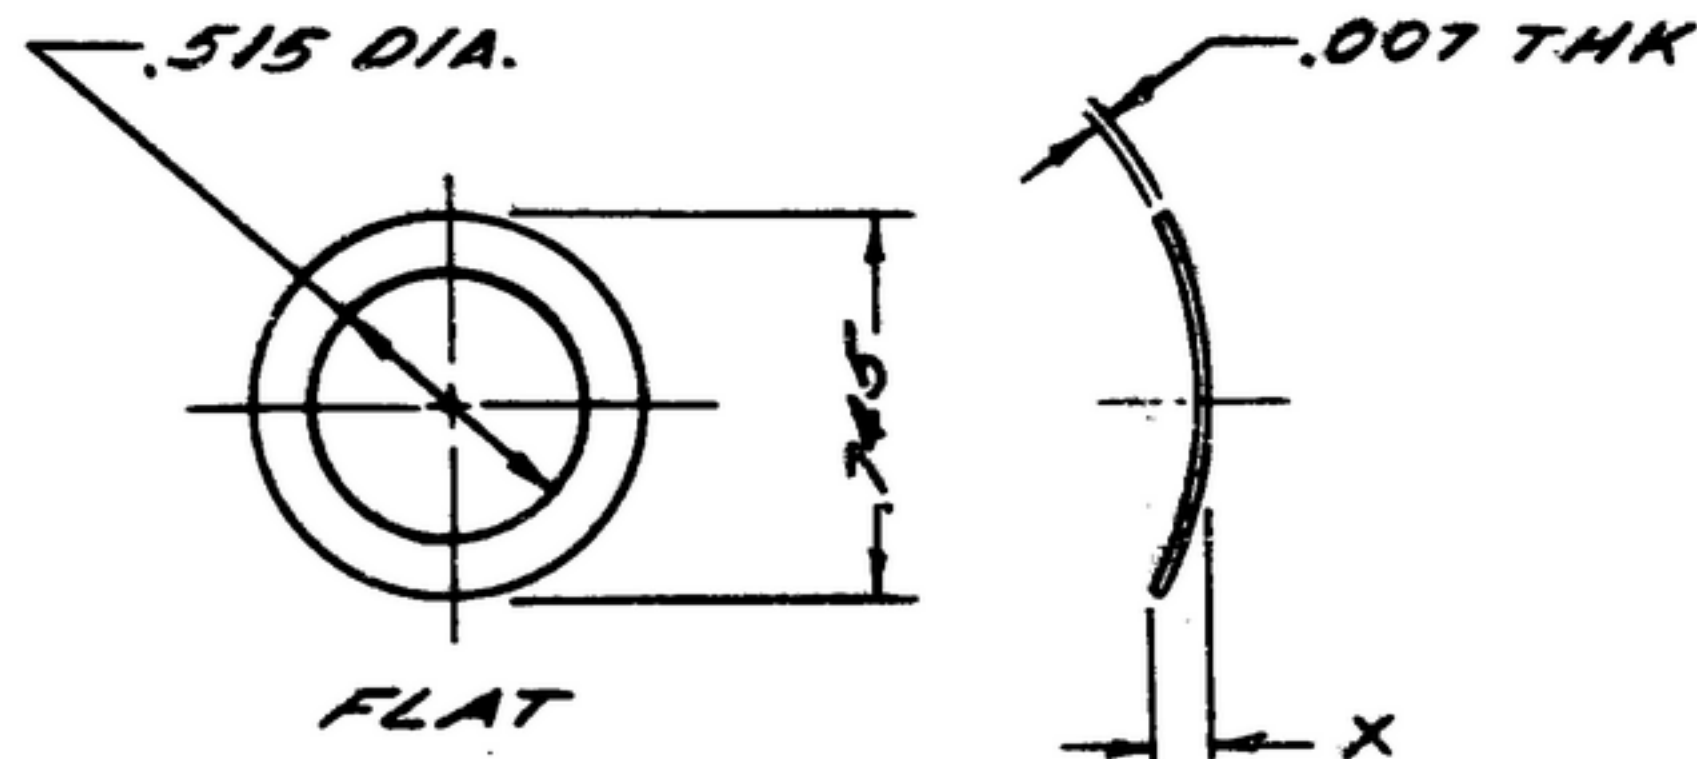

NOTES:
1-HEAT TREAT 76-80 ON ROCKWELL 15N SCALE OR 54-60 ON ROCKWELL 30N SCALE
2-THICKNESS MAY VARY TO MEET LOAD REQUIREMENTS
3-SERVICE CONDITIONS:
CONSTANT LOAD
TEMPERATURE RANGE +75° TO -60°C
LOAD AT X=.062 FROM 2.7 TO 3.3 POUNDS
FREE HEIGHT OF X, MIN.=.085
4-MAT'L: BERYLLIUM COPPER, COND. 1/2 H, PER SPEC. QQ-C-533,.007 THK. (SEE NOTE 2)

UNLESS OTHERWISE SPECIFIED		21882-PW-50-93		DEPARTMENT OF THE ARMY		
SM-C-14864	SC-DL-144500	DIMENSIONS ARE IN INCHES		U. S. ARMY SIGNAL MATERIEL SUPPORT AGENCY		
SM-D-148312		TOLERANCES ON				FORT MONMOUTH NEW JERSEY
SM-C-144295		FRACTIONS DECIMALS ANGLES	SIGNAL CORPS			
SM-C-143681	SC-DL-143280	- 1.005 -	REVIEWED PME			
SM-C-178766	SC-DEVT8167	DRAWN RW	APPROVED PD BR	SM-B-178766		
NEXT ASSY	USED ON	DATE 26 OCT 1962	DATE OCT. 1, 53	SCALE 2/1	CODE 80063	
APPLICATION	APPROVED	CHECKED PS				

WHEN REFERRING TO THIS DRAWING STATE DRAWING NO., APPLICABLE ISSUE SYMBOL, IF ANY, AND DATE